



Hewlett Packard
Enterprise

HP-UX 11i v3 Installation and Update Guide

HPE Integrity Server Blades and HPE Integrity Servers

Abstract

This guide describes cold-installing and updating to HP-UX 11i v3 (B.11.31). This document is intended for system administrators responsible for installing, configuring, and managing HP-UX 11i v3 on HPE Integrity Server Blades and HPE Integrity Servers. Administrators are expected to have knowledge of operating system concepts, commands, and configuration.

Part Number: 10-160002-255
Published: May 2025
Edition: 30



Notices

Products sold prior to the November 1, 2015 separation of Hewlett-Packard Company into Hewlett Packard Enterprise Company and HP Inc. may have names and model numbers that differ from current models.

The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services.

Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Links to third-party websites take you outside the Hewlett Packard Enterprise website. Hewlett Packard Enterprise has no control over and is not responsible for information outside the Hewlett Packard Enterprise website.

Confidential computer software. Valid license from Hewlett Packard Enterprise required for possession, use, or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Acknowledgments

Intel® and Itanium® are trademarks of Intel Corporation in the United States and other countries. Java is a registered trademark of Oracle and/or its affiliates.

UNIX® is a registered trademark of The Open Group.

This product includes software developed by the Apache Software Foundation. This documentation is based on information from the Apache Software Foundation (<https://www.apache.org>). This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<https://www.openssl.org>). This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes PHP, freely available from the PHP Group (<https://www.php.net>). This product includes software developed by the OpenLDAP Project (<https://www.openldap.org>).



Revision History

To ensure that you receive the latest edition, subscribe to the appropriate product support service. Contact the Hewlett Packard Enterprise sales representative for details. The latest version of this document is available at [HP-UX 11i v3 manuals](#).

Table 1: Publishing history details

Document manufacturing part number	Supported operating systems	Edition	Publication date
10-160002-255	HP-UX 11i v3	Edition 30	May 2025
10-160002-245	HP-UX 11i v3	Edition 29	May 2024
10-160002-235	HP-UX 11i v3	Edition 28	May 2023
10-160002-226	HP-UX 11i v3	Edition 27	June 2022
10-160002-225	HP-UX 11i v3	Edition 26	May 2022
10-160006-218	HP-UX 11i v3	Edition 25	August 2021
10-160002-215	HP-UX 11i v3	Edition 24	May 2021
P13651-002a	HP-UX 11i v3	Edition 23	May 2020
P13651-002	HP-UX 11i v3	Edition 22	May 2020
P13651-001	HP-UX 11i v3	Edition 21	May 2019
P07212-002	HP-UX 11i v3	Edition 20 (retired).	May 2018
803824-003	HP-UX 11i v3	Edition 18	May 2017
803824-002a	HP-UX 11i v3	Edition 17 (retired).	April 2016
803824-002	HP-UX 11i v3	Edition 17	March 2016
803824-001R	HP-UX 11i v3	Edition 16	November 2015
803824-001	HP-UX 11i v3	Edition 15 (retired).	March 2015
763071-001a	HP-UX 11i v3	Edition 14.1 (web only).	September 2014
763071-001	HP-UX 11i v3	Edition 14	March 2014
BA927-90195	HP-UX 11i v3	Edition 13 (retired).	March 2013
BA927-90174	HP-UX 11i v3	Edition 12	September 2012
BA927-90153	HP-UX 11i v3	Edition 11	March 2012
BA927-90078	HP-UX 11i v3	Edition 10	September 2011



Document manufacturing part number	Supported operating systems	Edition	Publication date
BA927-90099	HP-UX 11i v3	Edition 9.2 (web only).	March 2011
BA927-90067	HP-UX 11i v3	Edition 9.1 (retired).	March 2011
BA927-90046	HP-UX 11i v3	Edition 9 (retired).	March 2011
BA927-90045	HP-UX 11i v3	Edition 8	September 2010
BA927-90000	HP-UX 11i v3	Edition 7	March 2010
5992-6552	HP-UX 11i v3	Edition 6	September 2009
5992-5795	HP-UX 11i v3	Edition 5	March 2009
5992-4165	HP-UX 11i v3	Edition 4	September 2008
5992-3364	HP-UX 11i v3	Edition 3	March 2008
5992-5741	HP-UX 11i v3	Edition 2.2 (web only).	September 2007



Contents

HPE secure development lifecycle..... 8

Welcome to HP-UX 11i v3 9

 Introduction to HP-UX 11i v3 9

 HP-UX 11i v3 Operating Environments..... 9

 HP-UX 11i v3 media 10

 DVD image files 10

 Documentation 10

Choosing your installation methods 11

 Chapter checklist 11

 Choosing cold-install or update 11

 When to cold-install 11

 When to update..... 12

 Automatic removal of obsolete products during an update 13

 Preventing removal of obsolete products..... 13

 Supported update paths 14

 Choosing an installation source..... 15

 Local media..... 15

 Network depot 15

 Golden image..... 16

Before you begin 17

 Chapter checklist 17

 Reviewing known problems 18

 Locating source media and codewords 18

 Reviewing the software bundle install types..... 19

 Backing up your system..... 19

 Part I: Creating an operating system recovery image 19

 Part II: Backing up your data files 21

 Selecting your HP-UX console for Itanium-based systems..... 21

 Determining if the conconfig command exists on your system..... 22

 Using the conconfig command to select the primary HP-UX console..... 22

 Using the EFI Boot Manager to select the primary HP-UX console..... 23

 Mounting and unmounting the DVD..... 24

 Creating a network depot (optional)..... 25

 Messages: errors, warnings, and notes 25

 Special considerations 26

 HPE Insight Dynamics - VSE Suite for Integrity (VSEMgrt) no longer integrated into the distribution media 26

 Rolling update of HP-UX OEUR to a Serviceguard cluster..... 26

 Reducing downtime using Dynamic Root Disk 26

 Securing your system when installing and updating 27

 Authenticating HP-UX software..... 27

 Installing VxFS and VxVM 27

 System tuning for VxFS..... 28

 Next generation mass storage stack..... 28

 HPE Insight Remote Support Software..... 28



Cold-installing HP-UX 11i v3 from local media.....	30
Chapter checklist.....	30
Preparing to cold-install.....	31
Completing the preliminary tasks.....	31
Reviewing the cold-install process.....	31
Installing the latest Ignite-UX.....	32
Backing up your configuration files.....	32
Collecting information about your system.....	33
Creating a network depot (optional).....	35
Proceeding with the installation.....	35
Booting from the Operating Environment media.....	35
Customizing your installation.....	37
Configuring your installation.....	38
Finishing your installation.....	40
Completing the cold-install process.....	40
Retrieving configuration files after cold-installing.....	40
 Updating to HP-UX 11i v3	 42
Chapter checklist.....	42
Preparing to update.....	43
Completing the preliminary tasks.....	43
Reviewing the update process.....	43
Saving a list of software on the system.....	44
Rebuilding the kernel.....	44
Renaming your log files.....	44
Creating a network depot (optional).....	44
Installing the latest Update-UX.....	44
Updating tips.....	45
Proceeding with updating.....	47
Updating to HP-UX 11i v3 using the terminal user interface.....	47
Updating to HP-UX 11i v3 using the command line interface.....	55
Completing the update.....	57
 Installing applications and patches.....	 58
Chapter checklist.....	58
Installing HP-UX applications.....	58
Tips for installing or updating Hewlett Packard Enterprise applications.....	59
Installing HP-UX applications from the DVDs.....	59
Third-party software and hardware.....	60
Third-party (non-Hewlett Packard Enterprise) storage compatibility with HP-UX 11i v3.....	60
Third-party product installation scripts.....	60
HP-UX patching and patch management.....	61
Standard HP-UX patch bundles.....	61
Individual HP-UX patches.....	62
HP-UX Software Assistant.....	62
 Post-install/update tasks and troubleshooting.....	 63
Chapter checklist.....	63
Verifying the HP-UX cold-install or update.....	63
Part I: Listing all software installed on your system.....	64
Part II: Verifying the installed software.....	64
Configuring Operating Environment applications.....	64
Migrating to the agile mass storage stack.....	64
System tuning for VxFS 6.1.....	65

Backing up the system.....	65
Uninstalling HP-UX 11i v3.....	65
Removing applications and patches	65
Diagnostics	65
Online diagnostics.....	65
Offline diagnostics	66

Assessing your system and meeting system requirements.....67

Chapter checklist	67
System requirements	67
Supported systems.....	68
Determining disk space requirements.....	68
Disk space requirements for a cold-install	69
Disk space requirements for an update	70
Boot disk size limits	70
Verifying supported network drivers, mass storage drivers, I/O cards, and storage devices	71
Firmware updating	71
Receiving firmware alerts	71
Identifying model, release, and installed software.....	72
Identifying the model.....	72
Identifying the release date and Operating Environment.....	72
Identifying installed software.....	73

Support and other resources.....74

Accessing Hewlett Packard Enterprise Support	74
Accessing updates.....	74
Related documents	75
Remote support.....	75
Documentation feedback	75

Harmless messages and known problems76

Appendix Checklist.....	76
Messages you can ignore.....	76
Known install and update problems	78

Installing VxFS, OnlineJFS, LVM, and VxVM83

What is new for delivery of VxFS, OnlineJFS, LVM, and VxVM.....	83
Supported 6.1 configurations.....	84
VxFS and VxVM installation through cold-install.....	84
VxVM and VxFS installation with update-ux.....	85
Summary of cold-install and update scenarios	86
Past supported configurations – no longer supported	87
Unsupported system configurations	88

HP-UX 11i v3 Operating Environment software bundles89

HP-UX 11i v3 Operating Environment install/update structure	89
HP-UX 11i v3 software product categories	89
HP-UX 11i v3 software installation types	90
HP-UX 11i v3 Operating Environment contents.....	91
HP-UX 11i v3 Base Operating Environment.....	91
HP-UX 11i v3 Virtual Server Operating Environment	103
HP-UX 11i v3 High Availability Operating Environment	105



HP-UX 11i v3 Data Center Operating Environment106

Warranty and regulatory information..... 108
Warranty information.....108
Regulatory information.....108
 Belarus Kazakhstan Russia marking108
 Turkey RoHS material content declaration.....109
 Ukraine RoHS material content declaration109



HPE secure development lifecycle

Starting with HP-UX 11i v3 March 2013 update release, HPE secure development lifecycle provides the ability to authenticate HP-UX software. Software delivered through this release has been digitally signed using Hewlett Packard Enterprise's private key. You can now verify the authenticity of the software before installing the products, delivered through this release.

To verify the software signatures in signed depot, the following products must be installed on your system:

- B.11.31.1303 or later version of SD (Software Distributor)
- A.01.02.00 or later version of HP-UX Whitelisting (WhiteListInf)

To verify the signatures, run: `/usr/sbin/swsign -v -s <depot_path>`

For more information, see **Software Distributor documentation** at: <https://www.hpe.com/info/sd-docs>.

NOTE: Ignite-UX software delivered with HP-UX 11i v3 March 2014 release or later supports verification of the software signatures in signed depot or media, during cold installation. For more information, see **Ignite-UX documentation** at: <https://www.hpe.com/info/ignite-ux-docs>.



Welcome to HP-UX 11i v3

Introduction to HP-UX 11i v3

HP-UX 11i v3 is an enterprise release designed to deliver an available, efficient, and proven infrastructure demanded for mission-critical computing. It integrates proven UNIX® functionality with advances in high availability, security, virtualization, workload management, and instant-capacity-on-demand. HP-UX 11i v3 maximizes uptime and flexibility while reducing business risk and delivering compelling value.

Some key highlights of the latest HP-UX 11i v3 release include advancements in the areas of OS availability, updated support for industry standard tools and utilities, improved infrastructure management, capacity planning, and support for current I/O innovations for Integrity servers and interoperability improvements with other industry standard operating systems.

❗ **IMPORTANT:** 31 December 2025 marks the end of Standard Support for HP-UX 11i v3 Operating Environment and application software. No new software updates or patches will be released beyond this date. Please contact your HPE Services Support representative for inquiries and assistance.

❗ **IMPORTANT:** Effective 1 April 2021, HP-UX Operating Environment and application software are no longer supported on HPE 9000/PA-RISC based servers. References to HPE 9000/PA-RISC environments have been retained for historical reference only, and do not imply support.

❗ **IMPORTANT:** Starting with the May 2021 update, the OEUR DVD Media, the Application Media DVD, and Standard Patch bundles QPK, HWE, and Feature11i, are all intended strictly for use on HPE Integrity servers only. Hewlett Packard Enterprise recommends not to attempt to update or install these on HPE 9000 PA-RISC systems. For cold installing or updating HPE 9000 PA-RISC systems, use the HP-UX distribution of May 2020 or earlier, which are available for download from the HPE Software Center. For queries on updating selective products or applications on HPE 9000 PA-RISC systems, consult an HP-UX support representative.

HP-UX 11i v3 Operating Environments

HP-UX 11i v3 Operating Environments allow you to purchase, install, and maintain a package of up to 160 or more software components as one. This built-in integration means that you reduce risks, time, and costs through faster deployment and simpler life cycle management. For more detailed information on the HP-UX 11i v3 Operating Environments, see [HP-UX 11i v3 QuickSpecs](#).

For lists of the bundles in each Operating Environments, see [HP-UX 11i v3 Operating Environment software bundles](#).

Table 2: HP-UX 11i v3 Operating Environments

HP-UX 11i v3 OE	Description
Base OE (BOE)	Provides integrated HP-UX functionality for customers requiring less complex installations. The BOE contains all the applications included in the Foundation OE, and improves the bundle set by adding much-requested products such as Process Resource Manager (PRM) and APA. This OE is bundled as HPUX11i-BOE.
Virtual Server OE (VSE-OE)	Designed for customers seeking higher resource utilization or embarking on consolidation projects and need virtualization for a flexible UNIX environment. The VSE-OE contains all the products included in the BOE (and the original EOE) and adds a host of other products including HPE Matrix Operating Environment for HP-UX (formerly HPE Insight Dynamics – VSE for Integrity). The VSE-OE is bundled as HPUX11i-VSE-OE. NOTE: The VSEmgmt bundle has been removed from all OEs available from HPE, but can be downloaded separately from HPE portal. See the <i>HP-UX 11i v3 Read Before Installing or Updating</i>
High Availability OE (HA- OE)	For customers requiring high availability for large critical applications, this OE contains all the products included in the BOE (and the original EOE), plus applications such as HPE Serviceguard and HA toolkits required to enable a mission-critical server. This OE is bundled as HPUX11i-HA-OE.



NOTE: For more information about Operating Environments, see [HP-UX 11i v3 QuickSpecs](#).

HP-UX 11i v3 media

DVD image files

Depending on your service contract with Hewlett Packard Enterprise, your media kit might contain one or more of the following items:

- **HP-UX 11i v3 (B.11.31) OE multi-DVD image files** — Contains the Operating Environment (OE). For more information on OEs, see [HP-UX 11i v3 Operating Environments](#).
- **HP-UX 11i v3 (B.11.31) Application Software DVD image file** —Contains HP-UX application software. For installation information, see [Installing applications and patches](#).



IMPORTANT: Effective 1 February 2024, physical DVD media is no longer orderable for the HP-UX Operating Environment and Application Software. However, DVD image files (in .iso format) continue to be available through electronic delivery and download via the My HPE Software Center. Please refer to the section “[Choosing an installation source](#)” in this document for information on using DVD image files with HPE Integrated Lights Out.

Documentation

NOTE: The web is the primary source of technical documentation for the HP-UX Operating Environments and HP-UX Application Software. Web delivery supports Hewlett Packard Enterprise Green Business Technology Initiative to reduce packaging and also supports Hewlett Packard Enterprise goal to keep HP-UX technical documentation up-to-date and easily accessible.

The documentation can be viewed, downloaded, and printed from the web. For pointers to HP-UX documentation, see:

[A Guide to HP-UX Document Collections at the HPE Support Center](#).

The following documents can be found at the [HPE Support Center](#):

- **HP-UX 11i v3 Read Before Installing or Updating** — Provides last-minute information for HP-UX 11i v3. Read this booklet before cold-installing or updating HP-UX.
- **HP-UX 11i Version 3 Release Notes** — Provides an overview of what is new, changed, deprecated, or obsoleted for HP-UX 11i v3. Also provides links to product-specific documentation.
- **HP-UX 11i v3 Installation and Update Guide** — Provides instructions for cold-installing or updating to the latest release of HP-UX 11i v3.
- **HP-UX Consolidated Independent Software Unit (ISU) Release Notes for June 2025 or later:** This document contains release notes for various product updates, including those integrated into this OE Update Release.



Choosing your installation methods

This chapter provides information and scenarios to help you choose the most appropriate methods to install or update HP-UX 11i v3 on your system.

Chapter checklist

- **Choosing cold-install or update**
 - **When to cold-install**
 - **When to update**
 - **Supported update paths**
- **Choosing an installation source**
 - **Local media**
 - **HPE Integrity Integrated Lights Out (iLO) Virtual Media**
 - **Network depot**
 - **Golden image**

❗ **IMPORTANT:** Make sure you review **Harmless messages and known problems** for issues not discussed here that might apply to your system.

Also review the *HP-UX 11i v3 Release Notes* appropriate for your release (<https://www.hpe.com/support/hpux-11iv3-docs>).

NOTE: If your system is on HPE Mission Critical Support, discuss the proper installation method with the Hewlett Packard Enterprise Account Support Manager or Remote Support Account Advocate before proceeding.

Choosing cold-install or update

After evaluating the system and ordering any required hardware, you must decide whether to cold-install or to update HP-UX 11i v3 on the system.

❗ **IMPORTANT:** Starting with the May 2021 update, the OEUR DVD Media, the Application Media DVD, and Standard Patch bundles QPK, HWE, and Feature11i, are all intended strictly for use on HPE Integrity servers only.

Hewlett Packard Enterprise recommends not to attempt to update or install these on HPE 9000 PA-RISC systems. To cold-install or update HPE 9000 PA-RISC systems, use the HP-UX distribution of May 2020 or earlier, which are available for download from the HPE Software Center. For queries on updating selective products or applications on HPE 9000 PA-RISC systems, consult an HP-UX support representative.

When to cold-install

Cold-install means installing system software on a new (uninstalled) or existing system by completely rebuilding the root volume group, erasing the existing operating system and data on that volume, and installing the new operating system and specified software and data.



If you have ordered a new system with the Instant Ignition option (also known as factory integrated), the cold-installation process described here has already been performed. You can skip this section.

⚠ CAUTION: The cold-install process erases software on the root volume before installing. If you want to retain any existing software, make sure to back up that software before migrating or use update. **Cold-installing using Ignite-UX overwrites everything on the target volume.**

You can cold-install rather than update to HP-UX 11i v3 when:

- You have a new system.
- You are managing several systems with similar OS configurations.
- Your systems are organized with clean separation of the OS from user, application, and data files.
- Overwriting the root (/) volume on existing systems will not cause a loss of applications or data.
- Your system configuration is not listed as a supported update path. See **Supported update paths**.
- Your disk space needs reconfiguration. Note, however, that you can use Dynamic Root Disk to address disk space limitations that would otherwise prevent you from updating. See **Determining disk space requirements**.
- HP-UX 11i v3 May 2018 and 2019 OEUR were installable only on Intel Itanium 9500 Processor Series-based platforms or later. Starting with HP-UX 11i v3 May 2020 OEUR, VxFS 6.1 and VxVM 6.1 are supported and installable on all Intel Itanium Processor Series-based platforms. The platform restriction of support only for Intel Itanium 9500 or later Processor series-based platforms have been removed.

An advantage of cold-install is that supported software can be installed without regard for the software currently on the system, or concern for cleaning up old software.

You can cold-install on any **supported** system. See **Supported systems**.

For information about choosing installation and update sources, see **Choosing an installation source**.

See **Before you begin** for more information about preparing your system for cold-install. Then read the cold-install process using Ignite-UX in **Cold-installing HP-UX 11i v3 from local media**.

When to update

Update means using `update-ux` to selectively overwrite the operating system and application software from a DVD or network source depot.

You can update to HP-UX 11i v3 from HP-UX 11i v2 (B.11.23). Updating from a version earlier than HP-UX 11i v2 or OEs directly to HP-UX 11i v3 is not supported. First update to an HP-UX 11i v2 Operating Environment. If you want to migrate from HP-UX 11i v1 to HP-UX 11i v3 by updating, see the *HP-UX 11i v2 Installation and Update Guide* for information on how to update from HP-UX 11i v1 to HP-UX 11i v2 first.

You can update rather than cold-install HP-UX 11i v3 when:

- You are updating from a supported HP-UX 11i v2 or HP-UX 11i v3 system. See **Supported update paths** for specific details.
- You are concerned about recovering unique applications and data on your root volume, and do not want to write over non-OS files, which occur when cold-installing HP-UX 11i v3.
- Each system has a unique configuration.
- Current disk space is sufficient for HP-UX 11i v3. Note, however, that you can use Dynamic Root Disk to address disk space limitations that would otherwise prevent you from updating. See **Determining disk space requirements**.

An advantage of performing an update is that it leaves user data, configuration, and applications in place.

Updating to HP-UX 11i v3 is limited to the supported paths listed in **Supported update paths**.

For information about choosing installation and update sources, see **Choosing an installation source**.

See **Before you begin** for details on how to prepare your system to update to HP-UX 11i v3. The update process is described in **Updating to HP-UX 11i v3**.

Automatic removal of obsolete products during an update

From time to time, HPE needs to mark a product on the OE distribution media as obsolete, for example due to end of support for the product or for its component modules, from the vendor or open source community. In such cases, `update-ux (1M)` (by default) automatically removes the obsoleted product.

The removal of obsoleted products is guided by a special “mega bundle” named “OBSOLESCENCE” included in the OE distribution media. It contains special individual bundles for all products obsoleted till date. You may run `swlist` to list out the complete contents of the OBSOLESCENCE bundle, and thereby ascertain which products would be removed during `update-ux (1M)`. For illustration purposes, the following is a partial output:

```
# swlist -s <path>/HPUX11i-DC-OE.ALL OBSOLESCENCE
# OBSOLESCENCE                                B.11.31.2305    OBSOLESCENCE
OBSOLESCENCE.Obsolescence                     B.11.31.2305    HP-UX OE control script product
:
:
:
OBSOLESCENCE.ObsTC-SysSetup                   B.11.31         Obsolete Technical System Configuration
OBSOLESCENCE.ObsFDDI-HSC                      B.11.31.01      Obsolete HP HSC FDDI Driver
OBSOLESCENCE.Obshpuxws22APACHE                2.0.00          Obsolete HP-UX Apache-based Web Server
```

Preventing removal of obsolete products

HPE always recommends that you upgrade your products to the latest supported versions. However, in certain situations, you may wish to preserve one or more obsolete product(s) installed on your existing system, while updating the rest of the Operating Environment. You can specify the product names to be preserved, using command line options as in the following illustration.

Products installed on your existing system before updating the OE:

```
# swlist | grep hpuxws
hpuxws22Apache      B.2.2.29.03    HP-UX Apache-based Web Server
hpuxws22Tomcat      D.7.0.68.01    HP-UX Tomcat-based Servlet Engi
hpuxws22Webmin      A.1.070.13     HP-UX Webmin-based Admin
```

You may wish to update your system to the May 2021 OE. Note that the OBSOLESCENCE bundle in the May 2021 OE includes the bundle `Obshpuxws22Tomcat`. Also note that the OE ships the product `hpuxws24Tomcat`.

To preserve your existing Tomcat product, and prevent the installation of the newer product, run the `update-ux` command with exclude parameters naming the obsoleted product and new product, as follows:

```
# update-ux -p -s <path to new OE> HPUX11i-BOE !Obshpuxws22Tomcat !hpuxws24Tomcat
```

Example `swlist` on your system after the update operation completes:

```
# swlist | grep hpuxws
hpuxws22Tomcat      D.7.0.68.01    HP-UX Tomcat-based Servlet Engine
hpuxws24Apache      B.2.4.54.00    HP-UX Apache-based Web Server
hpuxws24Webmin      B.1.070.15     HP-UX Webmin-based Admin
```

Note that your existing Tomcat version is preserved, while the other products have been removed, and new products installed in their place.

Multiple exclusion parameters can be specified with the `update-ux` command, to preserve / exclude multiple products from the update operation.



Supported update paths

Table 3: Supported update paths list the supported update paths from HP-UX 11i v2 to HP-UX 11i v3 and from the original HP-UX 11i v3 OEs to the **new** HP-UX 11i v3 OEs. Be sure also to read the following **Update Path Notes**.

Table 3: Supported update paths

Operating Environment (OE)	HP-UX 11i v3 BOE	HP-UX 11i v3 HA-OE	HP-UX 11i v3 VSE-OE	HP-UX 11i v3 DC-OE
HP-UX 11i v2 FOE	x	x	x	x
HP-UX 11i v2 EOE			x	x
HP-UX 11i v2 MChOE				x
HP-UX 11i v2 TCOE	x			
HP-UX 11i v3 FOE	x	x	x	x
HP-UX 11i v3 EOE			x	x
HP-UX 11i v3 MCOE				x
HP-UX 11i v3 TCOE	x			
HP-UX 11i v3 BOE	x	x	x	x
HP-UX 11i v3 HA-OE		x		x
HP-UX 11i v3 VSE-OE			x	x
HP-UX 11i v3 DC-OE				x

Update path notes

- Base-VxFS-61 and Base-VxVM-61 are default bundles included in HP-UX 11i v3 May 2018 OEUR and later. In HP-UX 11i v3 May 2018 and 2019 OEUR, the bundles were installable only on Intel Itanium 9500 Processor Series-based platforms or later. Since HP-UX 11i v3 May 2020 OEUR, VxFS 6.1 and VxVM 6.1 are supported and installable on all Intel Itanium Processor Series-based platforms. The platform restriction of support only for Intel Itanium 9500 or later Processor series-based platforms have been removed.

For the existing HP-UX systems being updated to the OEUR through update-ux, the existing VxFS/VxVM release running on the system that is earlier than VxFS/VxVM 6.1 will be updated automatically.

! **IMPORTANT:** Ensure that the file system disk layout is at least at **VxFS DLV 5** (except '/') and VxVM disk group version is at least at **VxVM DGV 160** before upgrading to VxFS/VxVM 6.1. For more information on upgrading to 6.1, see **VxVM and VxFS installation with update-ux**.

To avoid the automatic update to VxFS/VxVM 6.1 during update-ux, you must explicitly clear Base-VxFS-61, Base-VxVM-61, Base-VxTools-61 and B39291B for a successful OE update.

For additional information, see the sections **Installing VxFS, OnlineJFS, LVM, and VxVM** and **Summary of cold-**

install and update scenarios in this document.

- You cannot downgrade to a lower-level Operating Environment.
- Updating from a release of HP-UX to another release of HP-UX that was released earlier in time is not supported. For example, trying to update from HP-UX 11i v2 June 2007 release to the HP-UX 11i v3 February 2007 release is not supported. This could cause system incompatibilities and unpredictable results. If you attempt to update to an earlier version of HP-UX, the update process will stop without updating your system and you will get the following error message:

```
ERROR:      You are attempting to update from your release of HP-UX to a version
of HP-UX that was released earlier in time. This is not supported. The update
process has stopped without making any changes to your system. Please see the
'Supported Update Paths' section of the HP-UX 11i v3 Installation and Update
Guide for more information.
```

Choosing an installation source

When cold-installing or updating your systems, you have several installation sources from which to choose. You can cold-install or update directly from the DVDs, copy the contents of the DVDs into network depots, or create a golden image of the desired system for installing many similar systems.



TIP:

With Dynamic Root Disk (DRD), you can efficiently provision VMs and blades with a DRD clone. For more information, see **Reducing downtime using Dynamic Root Disk**.

Local media

Uses:

Cold-install or update one system at a time.

You can cold-install or update directly from the DVDs in the media kit:

- HP-UX 11i v3 OE DVDs — Boot and install a new system or update an existing system.
- HP-UX Software Applications (also known as “AR”) DVDs — Install applications not bundled with the OE or install a newer version of an OE application.

This guide describes cold-installs only on a single system from local media. It describes updates on a single system from local media, as well, but it also describes updates using a network depot.

HPE Integrity Integrated Lights Out (iLO) Virtual Media

With Integrity iLO Virtual Media (vMedia), you can remotely install software from CD, DVD, or ISO image file without having to be physically at the server.

NOTE: vMedia performance varies between iLO versions. Please use iLO 3 on HPE Integrity Servers. iLO 3 is the latest version that supports HPE Integrity Servers. For more information, refer to [iLO 3 documentation](#) at the HPE Support Center. A list of iLO 3 documentation is also indexed in this [Document List](#).

Also note that a DVD in a blade enclosure uses internal vMedia. For further information, see the *HPE Superdome 2 Partitioning Administrator Guide* at <https://www.hpe.com/info/hpesc>.

Network depot

Uses:

Cold-install or update many systems in your enterprise.

Avoid manual media swaps.



Use Software Distributor (SD) commands to create depots containing the OE and other software, including patches and patch bundles. Then install or update from the depot using the latest version of Ignite-UX or Update-UX. For information, see **Creating a network depot (optional)**, as well as *Software Distributor Administration Guide* (<https://www.hpe.com/info/sd-docs>) and the *Ignite-UX Administration Guide* (<https://www.hpe.com/info/ignite-ux-docs>).

Updates from network depots (along with updates from local media) are described in **Updating to HP-UX 11i v3**.



IMPORTANT:

Be sure also to read the important information in **Standard HP-UX patch bundles**.

Golden image

Uses:

Deploy a customized system configuration to many systems.

Avoid manual media swaps.

Speed up installation time for multiple systems.

Simply put, a golden image is built by setting up a single system the way you want all of your systems to look, and then creating an image of that system. Once a golden image has been created, it is then deployed to multiple clients.

This method allows you to deploy a known-good system image that contains all of the files including **configuration** files that you want installed, and it is also faster than the standard SD-built network depots (as described in **Network depot**).

For more information about golden images, see the *Ignite-UX Administration Guide for HP-UX 11i* (<https://www.hpe.com/info/ignite-ux-docs>).



Before you begin

This chapter describes the steps you must take before actually cold-installing or updating to HP-UX 11i v3. It also describes situations that you must carefully consider before you cold-install and/or update.

NOTE:

The duplication of user and group IDs results in a change in file ownership and can stop applications which are working correctly.

Chapter checklist

- **Reviewing known problems**
- **Locating source media and codewords**
- **Reviewing the software bundle install types**
- **Backing up your system**
 - **Part I: Creating an operating system recovery image**
 - **Choosing make_net_recovery**
 - **Choosing make_tape_recovery**
 - **Choosing drd clone**
 - **Part II: Backing up your data files**
 - **Choosing Data Protector for backup**
 - **Choosing HP-UX fbackup/frecover utilities**
- **Selecting your HP-UX console for Itanium-based systems**
 - **Determining if the conconfig command exists on your system**
 - **Using the conconfig command to select the primary HP-UX console**
 - **Using the EFI Boot Manager to select the primary HP-UX console**
- **Mounting and unmounting the DVD**
- **Creating a network depot (optional)**
- **Messages: errors, warnings, and notes**
- **Special considerations**
 - **Reducing downtime using Dynamic Root Disk**
 - **Securing your system when installing and updating**
 - **Choosing security levels**
 - **Installing VxFS and VxVM**
 - **System tuning for VxFS**
 - **Next generation mass storage stack**



- **Mass storage stack for HP-UX 11i v3**
- **HP-UX 11i v3 device special files (DSF)**
- o **HPE Insight Remote Support Software**

Reviewing known problems

Before beginning any cold-install or update process, you must review the descriptions of harmless messages and known problems provided for you in **Harmless messages and known problems**.

These known problems notes include, but are not limited to, issues with cold-installing and/or updating to HP-UX 11i v3. You can also find other late-breaking news of issues at the Hewlett Packard Enterprise Support Center (<https://www.hpe.com/support/hpesc>).

Locating source media and codewords

Before you can cold-install or update, you must locate the source media needed for the process. The DVDs available in the media kit are described in **HP-UX 11i v3 media**.

You can obtain a codeword for a purchased product by contacting one of the Hewlett Packard Enterprise licensing services listed in **Table 4: Hewlett Packard Enterprise licensing services**.

NOTE: For the real-time codeword generation, go to the My License Portal website <https://enterpriselicense.hpe.com/>.

Table 4: Hewlett Packard Enterprise licensing services

Location	Live Chat	Email
Asia	Hours: Tokyo local time Mon to Fri 9AM - 5PM https://myenterpriselicense.hpe.com/cwp-ui/	licensing.apj@hpe.com
Europe , Middle East & Africa	Hours: GMT Mon to Fri 8AM - 4PM https://myenterpriselicense.hpe.com/cwp-ui/	licensing.emea@hpe.com
Americas	Hours: US Eastern Mon to Fri 8AM - 8PM https://myenterpriselicense.hpe.com/cwp-ui/	licensing.ams@hpe.com



Reviewing the software bundle install types

The structure of the HP-UX 11i v3 Operating Environments is broken down into categories and install types to make installing and updating easier and more flexible. For more information about this structure, see **HP-UX 11i v3 Operating Environment install/update structure**. You must familiarize yourself with the install types (**required**, **recommended**, and **optional**) before you start the cold-install or update process.

Backing up your system

Any data on the client disks that are used for installation, including the operating system, are removed entirely as part of the installation process. Make a recovery image of your system so you can easily restore it to its original state if a problem occurs. Back up your system before **and** after performing a cold-installation or update.

Backing up your system consists of two parts:

- **Part I: Creating an operating system recovery image**
- **Part II: Backing up your data files**

Part I: Creating an operating system recovery image

To protect your system data, create an operating system (OS) recovery image:

- The Ignite-UX server has two commands you can use to create an OS recovery image:
 - `make_net_recovery`
 - Create an OS recovery image and store it on an Ignite-UX server on the network.
 - Works on any system that has Ignite-UX installed.
 - See **Choosing make_net_recovery**.
 - `make_tape_recovery`
 - Create an OS recovery image on a bootable recovery tape.
 - Works on any system that has a local tape drive and Ignite-UX installed.
 - Also works on any system without an Ignite-UX server.
 - See **Choosing make_tape_recovery**.

NOTE: To include the entire contents of the root volume group instead of just a minimal OS, Hewlett Packard Enterprise recommends using the `-A` option to both `make_net_recovery` and `make_tape_recovery`.

- The Dynamic Root Disk (DRD) toolset can also be used to create a clone of the current root volume group. In the event of a failed upgrade or issues after cold-installing, you can boot from the clone to quickly recover the system:
 - `drd clone`
 - Create an OS image on a free local or SAN disk.
 - Works on any system that has the DRD toolset installed.
 - See **Choosing drd clone**.





IMPORTANT: The Ignite-UX recovery tools and DRD toolset are intended to be used in conjunction with data recovery applications to create a means of total system recovery. Hewlett Packard Enterprise recommends against using Ignite-UX or DRD as backup solutions. They must only be used as part of a recovery or availability strategy.

Choosing `make_net_recovery`

The Ignite-UX product has the `make_net_recovery` command to create an OS recovery image on another system on the network. The image created by `make_net_recovery` is specific to the system it was created for and its identity includes host name, IP address, networking information, and so on. In the event of root disk failure, you use the Ignite-UX server to restore the system by installing the OS recovery image.

The contents of the OS recovery image always includes all files and directories that are essential to bringing up a functional system. This essential list is predefined by `make_net_recovery`.

For more information on using `make_net_recovery`, see the *make_net_recovery volume(1M)* manpage or the *Ignite-UX Administration Guide* (<https://www.hpe.com/info/ignite-ux-docs>).

Choosing `make_tape_recovery`

The Ignite-UX product's `make_tape_recovery` command creates a bootable OS recovery tape for a system while it is up and running. When a system has a logical volume layout, the recovery tape (by default) only includes data from the root volume group, plus data from any non-root volume group containing the `/usr` directory.

You can run `make_tape_recovery` locally on the system from which you are trying to make an OS recovery tape. Data that is not in the root volume group must be backed up and recovered using normal backup utilities.

For more information on using `make_tape_recovery`, see the *make_tape_recovery volume(1M)* manpage on an Ignite-UX server or the *Ignite-UX Administration Guide* (<https://www.hpe.com/info/ignite-ux-docs>).

Choosing `drd clone`

The `drd clone` command allows you to create an OS recovery image, referred to as an inactive clone, on a free internal or SAN disk. For recovery purposes, all you need to run is

```
drd clone -t target_dsf
```

where `target_dsf` is the device special file of the spare disk.

In the event that the update on the active system does not go as planned, you can boot the pre-updated clone by entering:

```
drd activate -x reboot=true
```

If you do boot the pre-update clone, and subsequently decide to re-activate the updated image, you can use the same `drd activate` command noted above, as the use of this command will always set the primary boot path to the inactive image.

If the SoftReboot feature has been installed on your system, then it can be used with the following command:

```
drd activate -x softreboot=true
```

SoftReboot is supported with the HP-UX 11i v3 September 2011 (and later) OEUR and must be installed before cloning. For information on supported systems, see *SoftReboot White Paper* at <https://www.hpe.com/support/hpux-11iv3-docs>.



NOTE: If you have updated from 11i v2 to 11i v3 on the active system image, you can go back and forth between the inactive 11i v2 image and the updated 11i v3 image by ensuring the following:

- When an HP-UX 11i v2 system is booted and HP-UX 11i v3 is installed on the inactive image, you must not use any `sw*` commands with `drd runcmd`. Use of this operation would invoke 11i v3 libraries and executables, which can make system calls not supported on the 11i v2 kernel.
- When an HP-UX 11i v3 system is booted and HP-UX 11i v2 is installed on the inactive image, you can run `drd runcmd swlist` or `drd runcmd swverify`; however, you cannot run any other `sw*` commands.

The `drd` clone contains the entire contents of the root volume group, and thus has all the components that are essential to bringing up a functional system.

In addition to system recovery, DRD has other uses, all of which can reduce downtime. These include system maintenance, patching, testing, and provisioning. See **Reducing downtime using Dynamic Root Disk** for more information, including links to documentation and a website.

Part II: Backing up your data files

Depending on your system backup needs and your configuration, there are a number of different backup methods from which to choose. Two possible backup methods are as follows:

- HPE Data Protector
- HP-UX `fbackup/frecover` utilities

Choosing Data Protector for backup

If you are backing up large numbers of systems, the Data Protector software product can be useful. Data Protector is faster than other backup methods and provides for unattended backup as well. It allows you to efficiently centralize and administer backup procedures.

Using Data Protector involves setting up a database server and running software that directs and records the backup process for clients.

Choosing HP-UX `fbackup/frecover` utilities

Use the `fbackup` and `frecover` commands to selectively back up and recover files. The `fbackup` command can do the following:

- Indicate specific files or directories to include or exclude from a backup
- Specify different levels of backup on a daily, a weekly, or monthly basis
- Create an online index file

The `frecover` command restores backup files made using the `fbackup` utility. The `-r` option to the `frecover` command is generally used for recovering all files from your backup; the `-x` option is used for restoring individual files to your system. For complete details, see the *frecover volume(1M)* and *fbackup volume(1M)* manpages.

Selecting your HP-UX console for Itanium-based systems

You can skip this section if you are cold-installing on a PA-RISC system (it applies only to Itanium-based systems) or you are already on the system console.

If you are cold-installing HP-UX or changing your system configuration, you will need to select the correct console. If you have more than one possible console device (such as a graphics adapter and a console serial device) and you have not



configured your system console correctly, your installation session might appear to hang as you might be looking for output from the wrong device. Even if you have ordered a machine with HP-UX pre-installed, you will want to choose your console, despite the factory defaults.

Depending on the firmware level of your Integrity server, you can select your primary HP-UX console using one the following methods:

- The EFI `conconfig` command (if present)
- The EFI Boot Manager

NOTE: If you select either a system or an MP/iLO serial port, Hewlett Packard Enterprise recommends you choose a VT100-capable terminal device.

Serial port, MP/iLO and VGA device paths can vary between each Itanium-based system. See the appropriate platform documentation for your product for information on determining the device paths.

You can find more information on the EFI Paths used for console selection in the Intel® Extensible Firmware Interface (EFI) documents available from the Intel website.

Determining if the `conconfig` command exists on your system

To decide which method to use, first determine if the `conconfig` command exists on your system.

1. At the EFI prompt, enter the following command:

```
Shell> conconfig
```

- If the command exists, the system might return output similar to the following:

```
CONSOLE CONFIGURATION
Index Primary Type      Device Path
1      P      Serial  Acpi(HWP0002,PNP0A03,0)/Pci(1|2)
2      S      VGA     Acpi(HWP0002,PNP0A03,0)/Pci(4|0)
```

The above is an example of factory defaults. As you will see later in these steps, one of these devices will have to be configured as “primary” (**P**); the other will have to be configured with a status of “Not Configured” (**NC**).

- If the command does not exist, the system will return the error message:

```
conconfig not found.
```

2. Depending on whether the `conconfig` command is available at the EFI shell, use either the `conconfig` command or the EFI Boot Manager to select your primary HP-UX console.

Using the `conconfig` command to select the primary HP-UX console

If you have the `conconfig` command on your system, then you can take the following steps to select the primary HP-UX console. (For more information on the `conconfig` command, enter `help conconfig` at the EFI prompt.)

-
- ❗ **IMPORTANT:** Do not select more than one console device. HP-UX 11i v3 recognizes only one device at a time. Choosing more than one device can result in the appearance of a system hang. A warning message might also be issued.

1. Enter `conconfig` at the command line. You might see output similar to the following:

```
CONSOLE CONFIGURATION
Index Primary Type      Device Path
```



1	P	Serial	Acpi (HWP0002, PNP0A03, 0) / Pci (1 2)
2	NC	VGA	Acpi (HWP0002, PNP0A03, 0) / Pci (4 0)

2. Decide which console you want to use.

Depending on your system configuration, HP-UX can use one of the following devices as your system console:

- System Serial Port (if present)
- iLO (MP) Serial Port
- VGA device (MP/iLO)

3. Use the `conconfig` command to select your primary console. For example, to select “system serial port” as your primary console, enter the following at the command line:

```
Shell> conconfig 1 primary
```

4. Next, use the `conconfig` to deselect all other consoles so that only one console is marked **P and all others are marked **NC**. For example, if your `conconfig` output looks like the following:**

```
CONSOLE CONFIGURATION
Index  Primary  Type      Device Path
1      P          Serial    Acpi (HWP0002, PNP0A03, 0) / Pci (1|2)
2      S          VGA       Acpi (HWP0002, PNP0A03, 0) / Pci (4|0)
```

Enter:

```
Shell> conconfig 2 off
```

Now your `conconfig` output must look like this:

```
CONSOLE CONFIGURATION
Index  Primary  Type      Device Path
1      P          Serial    Acpi (HWP0002, PNP0A03, 0) / Pci (1|2)
2      NC         VGA       Acpi (HWP0002, PNP0A03, 0) / Pci (4|0)
```

Note that the unwanted VGA device in line 2 has the status of **NC** and the primary console in line 1 has the status of **P**.

5. Enter: `Shell> reset`

Using the EFI Boot Manager to select the primary HP-UX console

To use the EFI Boot Manager to select the primary HP-UX console, proceed with the following steps.

1. Decide what console you want to use.

Depending on your system configuration, HP-UX can use one of the following devices as your system console:

- System Serial Port (if present)
- iLO (MP) Serial Port
- VGA device (MP/iLO)

2. Using the EFI menu, do the following:


- Open the EFI Boot Manager.
- Under **Boot Menu**, select **Boot Configuration**.
- On the **Boot Configuration** screen, select **Console Configuration**.



- d. On the **Console Configuration** screen, select **one** device as your system console. The device you have selected must have a status of **P**; all others must have a status of **NC**.

NOTE: The following figure shows consoles with a primary (**P**) status and secondary (**S**) status. This would not be correct for your configuration. You must select only **one** device for a **P** status. The rest must be given an **NC** status.

Only one active console must be configured; otherwise, HP-UX might either fail to boot or boot with output directed to the wrong location.

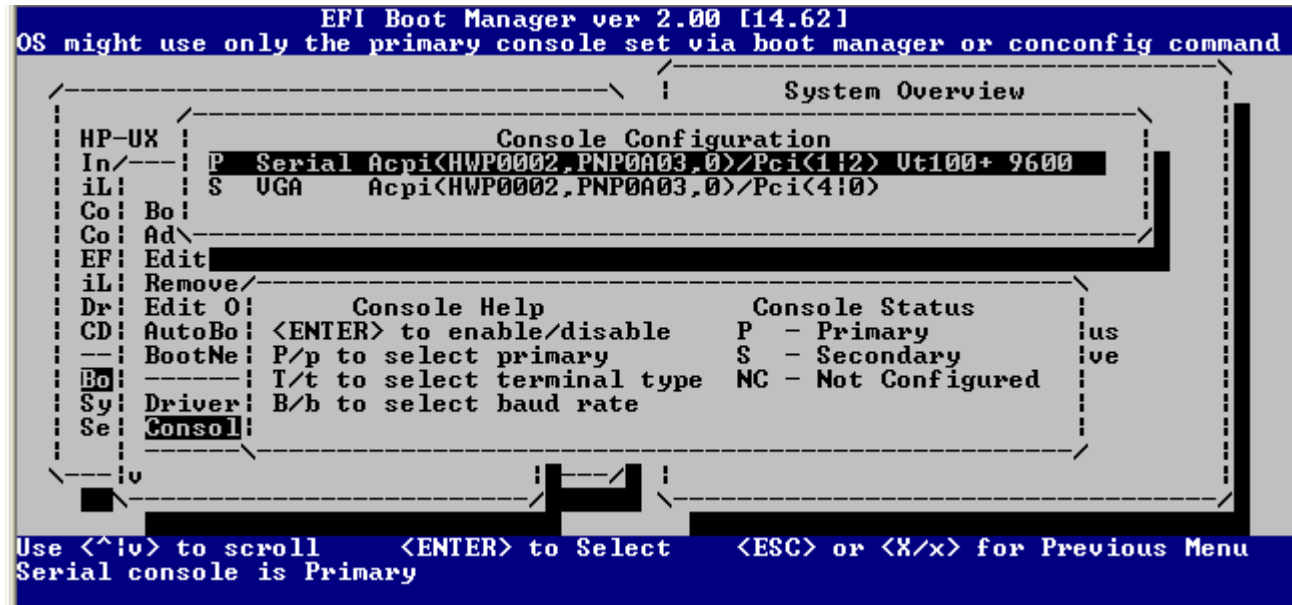

- e. Press **Esc** to return to the boot option maintenance menu.
- f. Select **Cold Reset** to reset your system.

Mounting and unmounting the DVD

Mounting the DVD

For some tasks, you might need to mount the DVD as a file system. To do so, take the following steps:

1. Insert the DVD into the DVD drive.

2. Find the DVD-ROM device file name:

```
ioscan -C disk -f -n -k | more
```

A typical device name is `/dev/dsk/c1t2d0`

3. Create a directory under root (`/`). For example:

```
mkdir /dvdrom
```

4. Mount the DVD onto the new directory as a file system. For example:

```
mount /dev/dsk/c1t2d0 /dvdrom
```

Unmounting the DVD

You must unmount the DVD before you can eject it from the DVD drive. For example:

```
umount /dvdrom
```

Note the DVD is automatically unmounted whenever the server reboots. For more information about mounting and unmounting, see the *mountvolume(1M)* and *umount volume(1M)* manpages.

Creating a network depot (optional)

You can create a network depot if you intend to cold-install or update HP-UX 11i v3 on other systems on the network. A network depot allows you to cold-install or update all systems on the network without having to move media from system to system. You can also create a network depot if you want to avoid manually swapping media in a single system.

❗ **IMPORTANT:** Also see the important information in [Standard HP-UX patch bundles](#).

As root, follow this procedure to create a network depot and copy all products from the HP-UX 11i v3 multiple DVD set to it:

Procedure

1. Verify that you have at least 10 GB of free space to create the network depot on another system in your network. If this space is not available, use `smh` either to create a new volume group or to extend an existing volume group. For help, see the `SMH` help or the *HP-UX System Administrator's Guide* (<https://www.hpe.com/support/hpux-11iv3-docs>).
2. The HP-UX 11i v3 OE comes as a multiple DVD set. Mount the first (or next) DVD. (For instructions, see [Mounting and unmounting the DVD](#).)
3. Create the directory that will contain the network depot you want to create. For example:

```
mkdir /var/11iv3
```
4. Copy all products on the mounted DVD to the target depot.
For example, to copy the products to the target depot called `update-depot`, enter the following command:

```
swcopy -s /dvdrom \* @ /var/11iv3/update-depot
```

NOTE: Make sure you copy all products from every HP-UX 11i v3 DVD to your target depot.

5. Unmount the DVD. (For instructions, see [Mounting and unmounting the DVD](#).)
6. For each additional DVD in the OE media set, replace the media in the DVD drive with the next DVD. Then repeat steps 2 and 4.

Messages: errors, warnings, and notes

While the HP-UX 11i v3 install or update progresses, you will see progress messages that are being entered into the log file. These messages usually refer to normal behavior. The `ERROR`, `WARNING`, and `NOTE` messages, however, have the following significance:

ERROR

Indicates a serious problem, usually requiring action from you so that the installation can proceed.

WARNING

Indicates something out of the ordinary, but **not** fatal. The warning **might** require action from you.

NOTE

Indicates useful information you must take note of, but **not** fatal. The note does not require action from you.

NOTE:

For information about harmless messages currently known to appear, see [Messages you can ignore](#).



Special considerations

In this section, you will find several situations and scenarios that you must give careful consideration before cold-installing or updating to HP-UX 11i v3. These situations might affect the decisions you make during the next steps in the cold-install and update process.

HPE Insight Dynamics - VSE Suite for Integrity (VSEMgrt) no longer integrated into the distribution media

The HP-UX distribution media no longer includes the product “HPE Insight Dynamics - VSE Suite for Integrity (VSEMgrt)”, across all Operating Environments and Application Software Media. Please refer to the [HP-UX Quick Specs](#) or the [May, 2021 OEUR Letter](#) for the announcement concerning the removal of VSEMgrt from the HP-UX media. The latest version of the VSEMgrt product can be downloaded from HPE.COM. To install the latest version of the VSEMgrt product, please follow the steps below after OE installation/update.

1. Install HPE SIM 7.6 from May 2021 (or later) OEUR media, if not already installed.
2. Download and install HPE SIM April 2021 hotfix **or later** from https://support.hpe.com/hpsc/public/docDisplay?cc=us&docId=emr_na-c04271436&lang=en-us
3. Download and install VSE from: <https://myenterpriselicence.hpe.com/cwp-ui/free-software/vse>

Rolling update of HP-UX OEUR to a Serviceguard cluster

Systems that are part of a Serviceguard cluster can be updated in a rolling fashion to avoid downtime of the entire cluster. It means that each node in a cluster performs an OE update after halting clustering on the node and reconnects to the cluster when the OE update is complete. For information on the known issue in halting a cluster node belonging to a Serviceguard Management Suite cluster and its remedial action, see the customer advisory at https://support.hpe.com/hpsc/doc/public/display?docId=emr_na-a00062555en_us. Serviceguard A.11.20 patch PHSS_44821 has been released to address the issue.

Reducing downtime using Dynamic Root Disk

With the HP-UX system administration toolset, Dynamic Root Disk (DRD), you can clone an HP-UX system image to an inactive disk. The following must be done:

- Perform system maintenance on the clone while your HP-UX 11i system is online.
- Update **from** an older version of HP-UX 11i v3 **to** HP-UX 11i v3 March 2009 (Update 4) or later.
- Quickly re-boot during off hours once the required changes have been made.
- Use the clone for system recovery, if required.
- Provision a new system by moving a clone of an LVM-managed root on which `drd rehost` has been run.
- Automatically synchronize the active image and the clone, eliminating the need to manually update files on the clone.

NOTE: Rehosting capabilities for HP-UX 11i v2 are different than for HP-UX 11i v3. For information, see the *Dynamic Root Disk A.3. * Administrator's Guide* (<https://www.hpe.com/info/drd-docs>).

DRD supports both HPE Logical Volume Manager (LVM) and Veritas Volume Manager (VxVM) root volumes, except where provided, and runs on both HP-UX 11i v2 and v3.

For information about using a `drd` clone for creating an OS recovery image, see [Choosing drd clone](#).



Securing your system when installing and updating

When installing and updating, you can harden your system by choosing from a variety of security levels to ensure that your system is in a secured state.

HP-UX Bastille provides customized lockdown on a system-by-system basis by encoding functionality similar to Bastion Host and other hardening and lock-down checklists. HP-UX Bastille (HPUXBastille) is included as **recommended** (default-installed) software on the OE DVD.

Choosing security levels

The Install-Time Security (ITS) options include the HP-UX Bastille security lock-down engine. The interactive GUI helps you select the configuration that meets your operational needs. You can choose from four preconfigured levels of security, each with an incrementally higher level:

Sec00Tools

Installs the security infrastructure. Does not implement any security changes during installation or updating, but ensures the required software is installed. The higher security levels are dependent on Sec00Tools.

Recommended (default-installed).

Sec10Host

Installs a host-based lock-down system. Most network services are disabled, but they can be reinstated by running the *bastillevolume(1M)* command. **Optional** (customer-selectable).

Sec20MngDMZ

Installs a managed lock-down system that blocks most incoming traffic with an HP-UX IPFilter firewall. **Optional**.

Sec30DMZ

Installs a DMZ full host-based and IPFilter network lock down. HP-UX IPFilter blocks most incoming connections, except HP-UX Secure Shell. **Optional**.

You can change these security settings after installing or updating your system. For more information about HP-UX Bastille, including security levels, see the *HP-UX Bastille User Guide* (<https://www.hpe.com/info/hpux-security-docs>).

 **IMPORTANT:** Due to increased system hardening requirements, some locked-down services and protocols might be used by other applications and have adverse effects on the behavior or functionality of these applications. For more information about configuring HPE Serviceguard with HP-UX Bastille and IPFilter, see the *HP-UX Bastille UserGuide*.

Authenticating HP-UX software

Starting with the March 2013 release, the HPE Secure Development Lifecycle provides the ability to authenticate HP-UX software. Software delivered through an Operating Environment (OE) or the AR media is now digitally signed using Hewlett Packard Enterprise's private key. You can now verify the authenticity of the software before installation of an OE or products delivered through the OE or AR media. For more information, see the Software Distributor documentation at <https://www.hpe.com/info/sd-docs> and the Ignite-UX documentation at <https://www.hpe.com/info/ignite-ux-docs>.

Installing VxFS and VxVM

Starting with HP-UX 11i v3 May 2018 OEUR, VxFS 6.1 and VxVM 6.1 are the bundled products. VxFS 6.1 is required VxFS product which is always selected in the Ignite-UX tool for installation. VxVM 6.1 is optional VxVM product which must be explicitly selected in the Ignite-UX tool for installation. The default selection for all systems is VxFS 6.1 plus LVM.

HP-UX 11i v3 May 2018 and 2019 OEUR were installable only on Intel Itanium 9500 Processor Series-based platforms or later. Starting with HP-UX 11i v3 May 2020 OEUR, VxFS 6.1 and VxVM 6.1 are supported and installable on all Intel Itanium Processor Series-based platforms. The platform restriction of support only for Intel Itanium 9500 or later Processor series-based platforms has been removed. VxFS/VxVM 6.1 remains unsupported on PA-RISC platforms.

For existing HP-UX systems being updated to the OEUR through update-ux, the existing VxFS/VxVM release running on the system that is earlier than VxFS/VxVM 6.1 will be updated automatically. To avoid the automatic update to VxFS/

VxVM 6.1 during update-ux, you must clear Base-VxFS-61, Base-VxVM-61, Base-VxTools-61 and B3929IB for a successful OE update. For more information, see *Installation of non-default VxFS and VxVM software version on HP-UX 11i v3 2020*.

System tuning for VxFS

If your system has the minimum amount of memory, you might need to manually set VxFS tunables for optimal performance after cold-installing or updating to HP-UX 11i v3. Two VxFS tunables, `vx_ninode` and `vxfs_bc_bufhwm`, have an effect on system memory consumption. For guidelines on setting the tunables for machines with relatively low RAM, see the *Veritas Storage Foundation 6.1 Administrator's Guide* at <https://www.hpe.com/info/hpux-LVM-VxVM-docs>.

Next generation mass storage stack

Mass storage stack for HP-UX 11i v3

HP-UX 11i v3 introduces a new representation of mass storage devices, known as the agile view. In the agile view, disk devices and tape drives are identified by the actual object, not by a hardware path to the object. In addition, paths to the device can change dynamically and multiple paths to a single device can be transparently treated as a single virtualized path, with I/O being distributed across those multiple paths.

In HP-UX 11i v3, there are three different types of paths to a device: legacy hardware path, lunpath hardware path, and LUN hardware path. All three are numeric strings of hardware components, with each number typically representing the location of a hardware component on the path to the device.

The new agile view increases the reliability, adaptability, performance, and scalability of the mass storage stack, all without the need for operator intervention.

For more information, see these white papers on **HP-UX 11i v3**:

- *HP-UX 11i v3 Persistent DSF Migration Guide*
- *The Next Generation Mass Storage Stack: HP-UX 11i v3*

HP-UX 11i v3 device special files (DSFs)

In a similar way to hardware paths, there are two types of Device Special Files (DSFs) for mass storage: legacy DSFs and persistent DSFs. Both can be used to access a given mass storage device independently, and can coexist on a given system.

DSFs: installing and updating

If you cold-install HP-UX 11i v3, both legacy and persistent DSFs are automatically created. By default, the installation process will configure system devices like the boot, root, swap, and dump devices to use persistent DSFs. This means that configuration files such as `/etc/fstab`, `/etc/lvmtab`, and others will contain references to persistent DSFs.

When you update from HP-UX 11i v2 to 11i v3, existing legacy DSFs are retained and persistent DSFs will be created. Configuration files are not updated to use agile DSFs. HP-UX will continue to use the existing legacy DSFs referenced in configuration files.

Legacy DSFs are completely backward compatible, and will not be affected by any persistent DSFs on the same server. A device can be simultaneously accessed via legacy and persistent DSFs.

For more information, including definitions of **legacy** and **persistent**, see “The Next Generation Mass Storage Stack: HP-UX 11i v3” and “HP-UX 11i v3 Persistent DSF Migration Guide” (**HP-UX 11i v3 manuals**).

HPE Insight Remote Support Software

After successful HP-UX 11i installation or update, it is recommended to install Insight Remote Support software to enable enhanced delivery of Hewlett Packard Enterprise Warranty, HPE Care Pack Service, or Hewlett Packard Enterprise contractual support agreement. Insight Remote Support supplements your monitoring, 24x7 to ensure maximum system availability by providing intelligent event diagnosis, and automatic, secure submission of hardware event notifications to Hewlett Packard Enterprise, which will initiate a fast and accurate resolution, based on the product service level.



Notifications may be sent to your authorized Hewlett Packard Enterprise Channel Partner for onsite service, if configured and available in your region.

The software is available as follows:

Insight Remote Support Standard: This software supports server and storage devices and is optimized for environments with 1-50 servers. Ideal for customers who can benefit from notification, but do not need service delivery and integration with a management platform.

Details are available at <https://www.hpe.com/info/insightremotesupport>.

To download the software, go to Free HPE Software Center: <https://myenterpriselicense.hpe.com/cwp-ui/free-software/>.

Enter **Insight Management** as the **Product Name** and click **Search**.



Cold-installing HP-UX 11i v3 from local media

This chapter describes cold-installing HP-UX 11i v3 from local OE media.

Chapter checklist

- **Preparing to cold-install**
 - **Completing the preliminary tasks**
 - **Reviewing the cold-install process**
 - **Installing the latest Ignite-UX**
 - **Backing up your configuration files**
 - **Collecting information about your system**
 - **Miscellaneous data collection table**
 - **Network data collection table**
 - **Creating a network depot (optional)**
- **Proceeding with the installation**
 - **Booting from the Operating Environment media**
 - **Booting Your Itanium-based system**
 - **Booting your PA-RISC system**
 - **Customizing your installation**
 - **Configuring your installation**
 - **Finishing your installation**
- **Completing the cold-install process**
 - **Retrieving configuration files after cold-installing**
 - **Creating a new root home directory**
 - **Recovering customized and personal files**
 - **Restoring /home**
 - **Restoring other files**

NOTE:

If you have ordered a new system with the Instant Ignition option (also known as factory integrated), the cold-installation process described here has already been performed. You may skip this chapter.

If your system is on Mission Critical Support, discuss the proper installation method with your Hewlett Packard Enterprise Account Support Manager or Remote Support Account Advocate before proceeding.



Preparing to cold-install

The following sections describe the initial steps you must take before proceeding with your installation. Also included is a graphic overview of the cold-install process.

CAUTION:

The cold-install process overwrites everything on all disks selected to participate in the installation. Make sure you have reviewed and completed the steps in **Backing up your system**.

Completing the preliminary tasks

Before you cold-install HP-UX 11i v3, make sure that:

- You have assessed the current state of your system and have met all the requirements described in **Assessing your system and meeting system requirements**.
- You have chosen the most appropriate installation methods and sources described in **Choosing your installation methods**.
- You have completed the steps (especially backing up your system) and have reviewed the special situations described in **Before you begin**.

Reviewing the cold-install process

Figure 1: Cold-Installing HP-UX 11i v3 shows the overall process of cold-installing HP-UX 11i v3 from local media. You can also cold-install HP-UX 11i v3 from network depots and from golden images. For more information on these alternative methods of cold-installing, see **Choosing an installation source**.



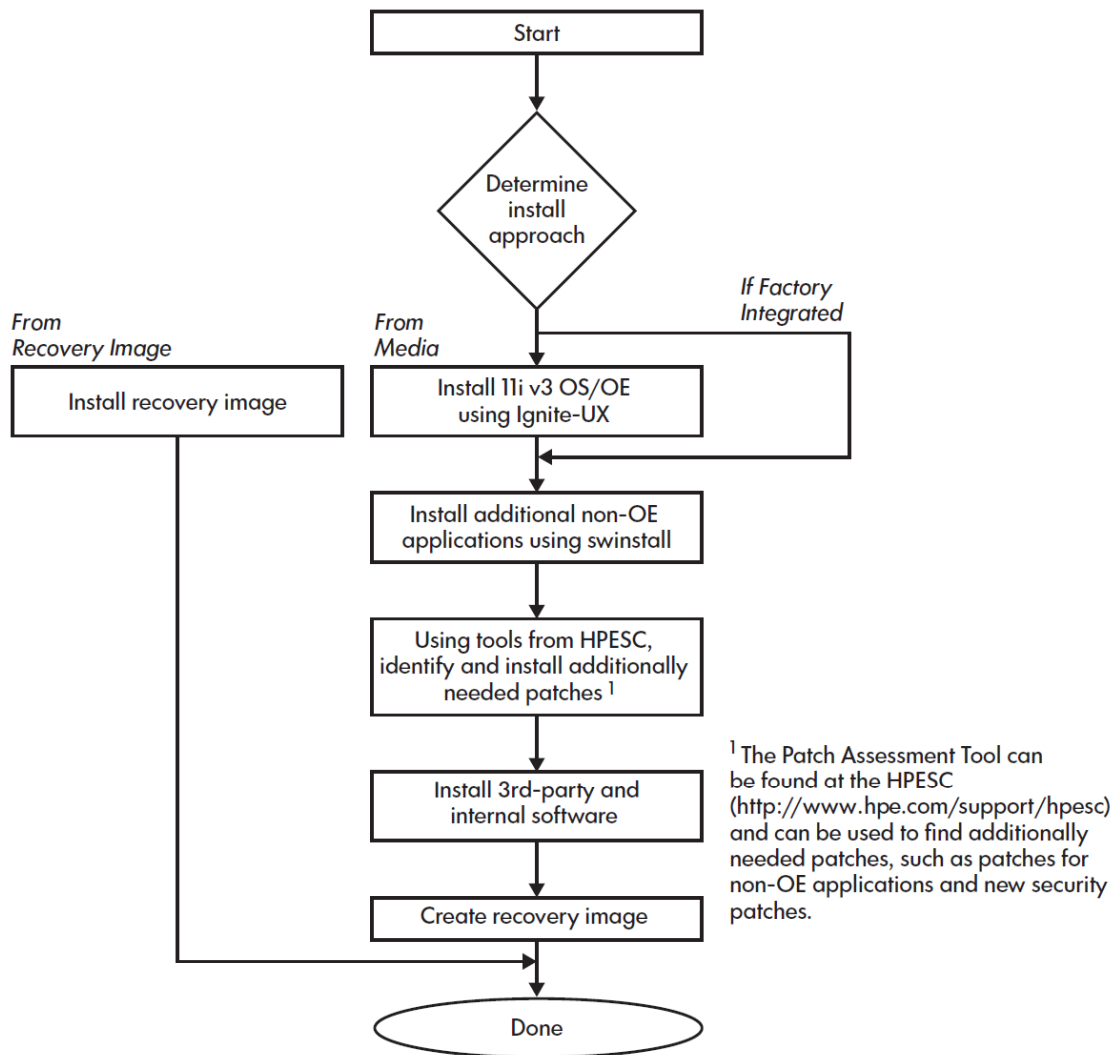


Figure 1: Cold-Installing HP-UX 11i v3

Installing the latest Ignite-UX

Use the latest version of Ignite-UX to cold-install HP-UX 11i v3. Get the latest Ignite-UX version from <https://myenterpriselicense.hpe.com/cwp-ui/free-software/IGNITEUXB>. For Ignite-UX supported versions document, see this [product page](#).

Backing up your configuration files

If you plan to cold-install HP-UX 11i v3 on a system that already has HP-UX installed, and you want to have that system serve the same role as it did before, then you will want to preserve your configuration files. Such files include the following:

- Configuration files in `/etc`
- The contents of `/usr/local`
- Any local home directories (that is, those you do not import from another system)
- Any configuration files located in the `/etc/opt` directories for installed software



Collecting information about your system

Before you cold-install HP-UX 11i v3, you must collect information about your existing system. Then, when you are installing HP-UX 11i v3, you will have the information available when needed. This section contains tables where you can record the information.

Use the collection tables in the following situations:

- When you choose the Advanced Installation (the default Ignite-UX option starting with version C.7.5), an interface gives you the opportunity to enter all of this data at the beginning of the install. The interface is a tabbed file folder and is character-based.
- If you choose to network-enable your system, you must designate a unique host name, host Internet Protocol (IP) address, and other network information for your server.

Contact your site network administrator for the details to include in these tables.

NOTE: During an installation, Ignite-UX configures the root, dump, and swap devices with the new HP-UX 11i v3 mass storage stack agile addressing representation. This means that, after installing, the commands that display the boot, dump, and swap devices will show them using the agile form. During a cold-install of HP-UX 11i v3, both legacy and persistent DSFs are automatically created. By default, the installation process will configure system devices like the boot, root, swap, and dump devices to use persistent DSFs. For more information on the new mass storage stack, see the white paper “The Next Generation Mass Storage Stack: HP-UX 11i v3” (<https://www.hpe.com/support/hpux-11iv3-docs>).

Miscellaneous data collection table

The following table might contain some items that are not familiar to you, but you may be prompted for this information during the install. However, the install process describes all options in detail. Therefore, you can defer the decisions about items that are unfamiliar to you until you reach that point in the install.

Table 5: Miscellaneous data

Type of data	Your specific data
Root Disk Path	
NOTE: Your root disk will typically display a legacy style Path name. However, HP-UX 11i v3 contains a new naming scheme for Root Disks. See the white paper “The Next Generation Mass Storage Stack: HP-UX 11i v3” for information on how to identify your legacy root disk device name in the agile HP-UX 11i v3 naming scheme. You can display the legacy hardware path using the More Info screen to show details on a specific lunpath hardware path.	
Root Swap Space	
File System Type	
LVM with VxFS (4.1 or 6.1), VxVM 6.1 with VxFS 6.1, or Whole disk with VxFS (4.1 or 6.1)	
Root Disk Volume Group Disks	
(How many disks you want placed into the root disk volume group, and whether you want the disks to be striped or mirrored.)	
Physical Location for SAS	

Table Continued



Type of data	Your specific data
(Physical Location is the enclosure and bay. WWID can also be used if known.)	
WWID for Fibre Channel (FC)	
(The storage administrator must provide WWID details for storage presented to the system. Knowing the WWPN of the adapters might also be useful.)	
WWID for Fibre Channel (FC) Virtual Connect (VC)	
(WWID might have been presented to the WWPN in the VC profile that to be used with the Blade. The profile must be assigned to the Blade prior to HP-UX install.)	
Select additional software	
Pre-Installed Disk Information (Is overwritten during the install disk; see Root Disk Path)	

Network data collection table

In addition to areas to record network data, the following table provides HP-UX commands that you can use after the installation to confirm the information.

Table 6: Network data

Type of data	Your specific data	HP-UX command to confirm data after system is up and running
Host Name		uname -n or hostname
Host IP Address		nslookup <i>hostname</i>
Subnet Mask		grep SUBNET_MASK /etc/rc.config.d/netconf
Default Gateway IP Address		grep ROUTE_GATEWAY /etc/ rc.config.d/netconf
Domain Name		cat /etc/resolv.conf
DNS IP Address		cat /etc/resolv.conf
NIS Domain Name		grep NIS_DOMAIN /etc/ rc.config.d/namesvrs



Creating a network depot (optional)

You can create a network depot if you intend to cold-install HP-UX 11i v3 on other systems on the network. A network depot allows you to cold-install all systems on the network without having to move media from system to system. You can also create a network depot if you want to avoid manually swapping media in a single system. For instructions on creating a network depot, see [Creating a network depot \(optional\)](#).

Proceeding with the installation

The following sections describe the stages in cold-installing from the Operating Environment (OE) DVDs.

Booting from the Operating Environment media

To begin, boot your system from the OE DVD. For specific instructions, choose one of the following subsections appropriate for your system:

- [Booting Your Itanium-based system](#)
- [Booting your PA-RISC system](#)

After booting your system, proceed to [Customizing your installation](#).

NOTE:

The cold-install process might involve multiple media swaps. To avoid manually swapping media, use a network depot. For information, see [Network depot](#).

Booting Your Itanium-based system

Procedure

1. Make sure any external devices that need to be configured at cold-install are connected to the target system and are turned on and operational.
2. Insert the HP-UX 11i v3 DVD (Disk 1) into the drive.
3. Turn the system on, reboot, or cycle power.

If the system boots automatically, the kernel scans the system for I/O devices.

If the system does not boot automatically, it goes to the boot menu. It is a timed menu; press any key to stop the timer. Then, you can run the install manually from the EFI shell using the following steps:

- a. From the boot menu, select **EFI Shell (Built In)**.
- b. At the EFI shell prompt, specify the device name (for example, `fs1 :`) for the DVD-ROM and then enter the EFI `install` command, as in the following example.

NOTE: Your DVD device might not always be `fs1`. Make sure you verify the ID appropriate to your DVD device.

If the device is not automatically selected, select the device name for the DVD-ROM and then execute `install`. For example, from the EFI shell prompt, you might see something similar to the following:

```
Shell> fs1:
fs1:\> install
```

If you do not see the DVD-ROM device, use the `map` command to list all device names from the EFI shell prompt. If you change the DVD in the drive after going to the EFI shell, you must run the command `map -r` to allow EFI to locate the bootable DVD in the drive

The list of devices is displayed automatically, and the install process selects the device for you.

After the kernel has booted, it scans the system for I/O devices.

Booting your PA-RISC system

Procedure

1. Make sure any external devices that need to be configured at cold-install are connected to the target system and are turned on and operational.
2. Insert the HP-UX 11i v3 DVD (Disk 1) into the drive.
3. Stop the autoboot by pressing any key.

The boot console menu is displayed. If you need help, enter: **HELP**.

4. Ensure that Fast Boot is enabled.

a. Select the **Configuration Menu: CO**

b. If the Fast Boot selection is available, switch Fast Boot ON:

FB ON

The full memory check that is run when Fast Boot is OFF might take several hours on a large system. (Remember to switch Fast Boot back OFF after installing HP-UX 11i.)

c. Return to the **Main Menu: MA**

5. Search for bootable devices, using the choices displayed (for example, enter **search** or **sea**). Output similar to this is displayed:

NOTE: The **search** or **sea** command will only display legacy hardware paths and will not display agile hardware paths. You will see the agile hardware path after booting your system. Note that both forms of hardware paths are supported (legacy and agile) and you can specify either hardware path in the **Boot** command. However, only the legacy hardware path can be displayed from the **Search** command.

For more information on agile hardware paths, see the white paper “The Next Generation Mass Storage Stack: HP-UX 11i v3” (<https://www.hpe.com/support/hpux-11iv3-docs>).

Main Menu: Enter command or menu > sea all

Searching for potential boot device(s)

This may take several minutes.

To discontinue search, press any key (termination may not be immediate).

Path#	Device Path (dec)	Device Type	IODC Rev
-----	-----	-----	-----
P1	0/0/0/2/1.2	Random access media	4
P2	1/0/0/2/0.6	Random access media	4
P3	1/0/0/2/1.3	Sequential access media	4

NOTE: On partitionable systems only the core cell is searched by default. If you want to search all cells, you can use the **all** option to the **sea** command or provide a cell number to search. Using the **all** option might take a significant amount of time if a large number of I/O devices are connected to the system. The valid options to the **sea** command for the system you are using will be shown when you interrupt the boot process to gain access to the BCH prompt.

6. For a legacy hardware path, boot from the DVD drive using the listed path number.

NOTE: If you know the agile hardware path, you may enter it as well. However, it requires a specific format compatible with the BCH interface limited to 32-bit elements. Use the command `ioscan -e` to display the boot path format to be used here to enter a lunpath hardware path in the `BOOT` command.

For an agile hardware path, boot from the DVD drive using the full agile hardware path name: `BOOT full_hardware_path`.

7. After a few minutes, at the `Interact with IPL?` prompt, press **n**.

The install kernel loads (3-5 minutes), after which a screen might prompt you to enter the keyboard language of your console.

8. Enter the number and press **Enter** again to confirm.

Customizing your installation

Once the system is booted, it displays the **Ignite-UX Welcome** screen for the HP-UX installation process.

Navigation tips

The following tips will help you navigate the installation interface:

- Use the **Tab** key to navigate between fields and the arrow keys to navigate within fields.
- Pressing **Enter** or the spacebar opens a menu list.
- Use the **Enter** key to select an item.
- For Help, use **Ctrl-K** for navigation-key help and **Ctrl-F** (or **F1**) for context-sensitive help.
- You can enter the underlined letter of an item (such as **I** for `install HP-UX`) to navigate more quickly.

The remainder of this section describes how to choose the degree of customization needed to configure your installation.

Procedure

1. If the installation detects that you have a PS2 or USB keyboard, the system displays the **Language Mapping** screen. Select the number of the language you want to use (such as **26** for US English) and then press **Enter** to confirm your choice.
2. From the **Ignite-UX Welcome** screen, select **Install HP-UX** to begin interacting with the Ignite-UX (cold-install) program and then press **Enter**. The system displays the **User Interface and Media Options** window.
3. From the **User Interface and Media Options** window, choose the degree of customizing needed to configure the installation. Mark your choices and select **OK**.

- a. Select from one of the three choices shown in **Source Location Options**:

- **Media only installation**

is the default setting for installing from a DVD. (This document only provides the procedures for cold-installing from media.)

- **Media with network enabled**

is recommended when you want basic networking enabled during installation so you can load software from a network depot (when an Ignite-UX server is not available).

- **Ignite-UX server based installation**

is recommended if you have an Ignite-UX server configured on your network and you want to supply custom configurations during the installation.

b. Select from one of the choices shown in **User Interface Options** :

- **Advanced Installation**

enables you to accept all the default installation parameters or fully customize your system such as configuring multiple disks and adjusting file system sizes. Hewlett Packard Enterprise recommends choosing the **Advanced Installation** option to configure your installation.

- **No User Interface**

is recommended if you want to accept all the default installation parameters and you do not need to verify the configuration using the user interface.

The remaining sections take you through the **Media only installation** option and the **Advanced Installation** option. For more help on using the **Advanced Installation** screens, see the *Ignite-UX Administration Guide* (<https://www.hpe.com/info/ignite-ux-docs>).

Configuring your installation

At this point, the system displays the **Basic** tab of the Ignite-UX itool Terminal User Interface (TUI) for the HP-UX Advanced Installation process. The **Basic** tab shows all the basic information for setting up the file system and for loading the Operating Environment. It also allows you to configure languages, locale, and keyboard requirements.

Procedure

1. In the **Configurations** field, select an overall system configuration that you want to use for this installation.
2. In the **Environments** field, select the type of Operating Environment you want to install on your system. Press **Enter** to view the choices.
3. In the **Root Disk** field, select the disk to store your root file system. Press **Enter** to view the choices. If you are unsure of what to choose, keep the default selection that has been determined by Ignite-UX.

HP-UX 11i v3 contains a new naming scheme for Root Disks. Note that the **Root Disk** screen displays the lunpath hardware path instead of the legacy hardware path. You can select **More Info** to view the legacy hardware path for the root disk selected.

For further information, including disk requirements, supported peripherals, and preparing the client for installation, see the *Ignite-UX Administration Guide* (<https://www.hpe.com/info/ignite-ux-docs>).

NOTE: The lunpath hardware path selected is used only to identify the Root Disk itself, and any available path to that disk may then be used as boot path. Therefore, it is normal to see a different lunpath hardware path to the disk used as boot path.

4. In the **File System** field, select the type of volume manager and file system you want to use for your root disk. Press **Enter** to view the choices.
5. In the **Languages** field, press **Enter** to browse the available languages, marking the desired selections. You can make any of the selections your system default language. This will become the system default language after it is installed. Make sure **HPUXLocales** is marked **Yes**.

The locale settings that were previously in HP-UX 11i v2 and located in the Common Desktop Environment (CDE) language bundle are now located in the `HPUXLocales` bundle. The `HPUXLocales` bundle contains internationalization support for many languages. This support includes date and time formats, currency, sorting methods, and so on.

NOTE: CDE is an optional product in HP-UX 11i v3. If you require it, you must explicitly select the CDE bundle (`CDE-xxx`). This applies if you need `dtterm`, which is located in CDE. For some localization situations, `dtterm` is required; therefore CDE must be selected.

6. Use the **Software** tab to change the software that will be installed on your system, if desired. If you choose the **No User Interface** option, then you cannot deselect the **recommended** (default-installed) software bundles.

To select or deselect the software bundles:

- a. Navigate to the **Software** tab.
- b. Select any **optional** software that you want loaded onto your system and deselect any **recommended** (default-installed) software that you do not want. Browse the list, marking your selections. Use the arrow keys to select a bundle and the spacebar to change the option. The bundles and associated product names are listed in **HP-UX 11i v3 Operating Environment software bundles**. For information about new and changed products and features, see the *HP-UX 11i Version 3 Release Notes* appropriate for the release you are cold-installing. The document is available on web at <https://www.hpe.com/support/hpux-11iv3-docs>.



CAUTION: Hewlett Packard Enterprise recommends that you do **not** deselect **recommended** (default-installed) software bundles or remove them from your system unless you know for certain that the software contained in these bundles is not required for your operating environment. Software might have unstated dependencies. Deselecting software might prevent products with dependencies on the software you deselected from functioning correctly.

Installing HP-UX 11i v3 installs a minimum set of default networking and mass storage drivers that apply to the system. You might need to select or specify other available networking and mass storage drivers to enable other cards on your system.

7. Use the **System** tab to configure system parameters such as security levels, host name, IP address, root password, and the time zone. You must set the appropriate security setting for your system at this time. You can choose to set the other system parameters now or at the first boot of your system, using `set_parms volume(1M)`. To set the appropriate security settings for your system, do the following.



IMPORTANT: You must become familiar with the security levels before you set them. For more information about setting appropriate security levels, see **Securing your system when installing and updating**.

- a. Navigate to the **System** tab and select **Security Choices**. The four security levels appear. By default, **Sec00Tools** is selected.
 - b. Select the appropriate security setting for your system.
 - c. Select **OK**.
8. Use the **File System** tab to perform a variety of file system and disk-configuration tasks: for example, resizing file systems, and adding and removing disks. You can also reconfigure the volume structure and associated file system mount points. The **File System** tab will differ in appearance, depending on whether you previously selected LVM or whole disk on the **Basic** tab.
Note that renaming or changing any disk file system structure on which Ignite-UX installs file system content causes the old file system on that disk to be lost. For more information on using the **File System** tab, see the *Ignite-UX Administration Guide* (<https://www.hpe.com/info/ignite-ux-docs>).
 9. Use the **Show Summary** button to view a summary of how your system will be configured. If you see any problems, or want to change any of your selections, back up to the appropriate step, and make the needed changes. Otherwise, select **Go!** (at the bottom of the screen) to initiate the installation.

Ignite-UX executes a pre-installation consistency check to identify any errors that must be corrected before the installation can proceed.

10. The system typically displays the **Confirmation Dialog** box that lists errors, warnings, and notes for the configuration settings. (For information on these messages, see **Messages: errors, warnings, and notes**.) Review any errors, warnings, or notes displayed in the **Confirmation Dialog** box. If there are any errors, they will need to be resolved before the installation can continue.

Warning messages will list which disks (ones that currently contain a recognized file system) will be overwritten during the install process. If you see a disk in the list that you do not want included, back up to the root disk selection and choose another disk. If the settings are correct, continue on to the next step.

11. After you have reviewed all of the information on the **Confirmation Dialog** box and resolved any errors, select **Go!** (at the bottom of the screen) to initiate the installation.

As the installation proceeds, you will see a log detailing output from the software installation. After the software is installed, the system will reboot prior to configuring the software and once again after installation is complete.

If your system was factory integrated, or if you chose to set the system parameters at the first boot of your system, the system will power down after the installation and ask for these system parameters at the next boot of your system.

Finishing your installation

Reboot your system. The **Welcome to HP-UX** screen is displayed and you will be prompted through a series of screens.

You might need to select or specify other available networking drivers to enable other cards on your system.

Procedure

1. To use a keyboard on this interface, you must specify a language mapping to be used by X Windows and the Internal Terminal Emulator (ITE). Choose the appropriate language. For English, select number **26**.
2. You are prompted to answer a few questions before you can use the system. The first is whether or not you plan to use the system on a network. If you completed the pre-install data collection tables (see **Collecting information about your system**), you have all the information you need for `set_parms`, so answer **Y** for yes.
3. Enter the basic network information that you collected in **Miscellaneous data collection table** on the screens that are displayed.
4. Confirm your choices. You are now finished with the install procedures and presented with a login screen. Log in to the system as root.

Completing the cold-install process

The following section describes a task you might need to take to complete your cold-install process. Upon completing this task (if necessary), proceed to the next chapters:

- (optional) **Installing applications and patches**
- **Post-install/update tasks and troubleshooting**



TIP:

After completing the installation, store the HP-UX DVDs in a safe place. You might need them later to install additional drivers or other software.

Retrieving configuration files after cold-installing

If you previously saved your configuration files on another system (see **Backing up your configuration files**), you can now retrieve them.

Creating a new root home directory

Consider creating a root home directory that is not `/`. Doing this keeps the user root dot files out of the `/` directory. Make sure it is on the root volume by calling it something like `/home.root`. Doing this is especially important if you are using Logical Volume Manager (LVM) and `/home` is a separate volume.



1. Log in as root.
2. Except on trusted systems, edit `/etc/passwd` to change the home directory from `root` to `/homeroot` and save it.
3. Create the `/homeroot` directory:

```
mkdir /homeroot
```
4. Move root's personal files (files beginning with `.`) to `/homeroot`:

```
mv /.[!~]* /homeroot
```
5. Exit and log in again as root.

Recovering customized and personal files

Recover all the customized and personal files that you saved previously by merging them manually. For example, do not overwrite `/etc/passwd` with your old version. Instead, either paste in entries from your old files or **merge** the old information into the new files.

Restoring /home

If you had a local home directory, you can restore it as follows:

- For instance, if you copied it to `/backup/system1/home`, enter these commands:

```
cd /backup/system1/home; find . -depth | cpio -pdm /system1/home
```

Or

```
cd /backup/system1/home; find . -depth | cpio -pdm /system1/home
```
- If you backed it up to tape with `fbbackup`, enter:

```
frecover -x -i /system1/home -v
```

Restoring other files

Carefully use the same techniques to restore other files and directories, such as `/usr`, `/local`, and `/opt`.

For help in importing entire volume groups, see the *HP-UX System Administrator's Guide: Logical Volume Management* (<https://www.hpe.com/support/hpux-11iv3-docs>).



Updating to HP-UX 11i v3

This chapter describes updating to HP-UX 11i v3 using `update-ux` to selectively overwrite the operating system and application software from a DVD or network source depot.

Chapter checklist

- **Preparing to update**
 - **Completing the preliminary tasks**
 - **Reviewing the update process**
 - **Saving a list of software on the system**
 - **Rebuilding the kernel**
 - **Renaming your log files**
 - **Creating a network depot (optional)**
 - **Installing the latest Update-UX**
 - **Updating tips**
- **Proceeding with updating**
 - **Updating to HP-UX 11i v3 using the terminal user interface**
 - **Updating to HP-UX 11i v3 using the command line interface**
 - **update-ux command**
 - **Updating to an Operating Environment from the command line**
 - **Updating optional software from the command line**
- **Completing the update**

NOTE:

If your system is on Mission Critical Support, discuss the proper installation method with your Hewlett Packard Enterprise Account Support Manager or Remote Support Account Advocate before proceeding.

NOTE:

Before updating the SATADVD-00 driver with `swinstall`,
`stop /usr/sbin/utild`, and restart it after installing or updating the driver.

❗ IMPORTANT:

Make sure you adhere to a supported update path. See **Supported update paths**.



Preparing to update

The following sections describe the initial steps you must take before proceeding with your update. Also included is a graphic overview of the update process.

Completing the preliminary tasks

Before you update to HP-UX 11i v3, make sure that:

- You have assessed the current state of your system and have met all the requirements described in **Assessing your system and meeting system requirements**.
- You have chosen the most appropriate update methods and sources described in **Choosing your installation methods**.
- You have completed the steps (especially backing up your system) and have reviewed the special situations described in **Before you begin**.

Reviewing the update process

Figure 2: Updating to HP-UX 11i v3 shows the overall update process. You can update your system from a network depot or from local media. Both methods are described in this chapter.

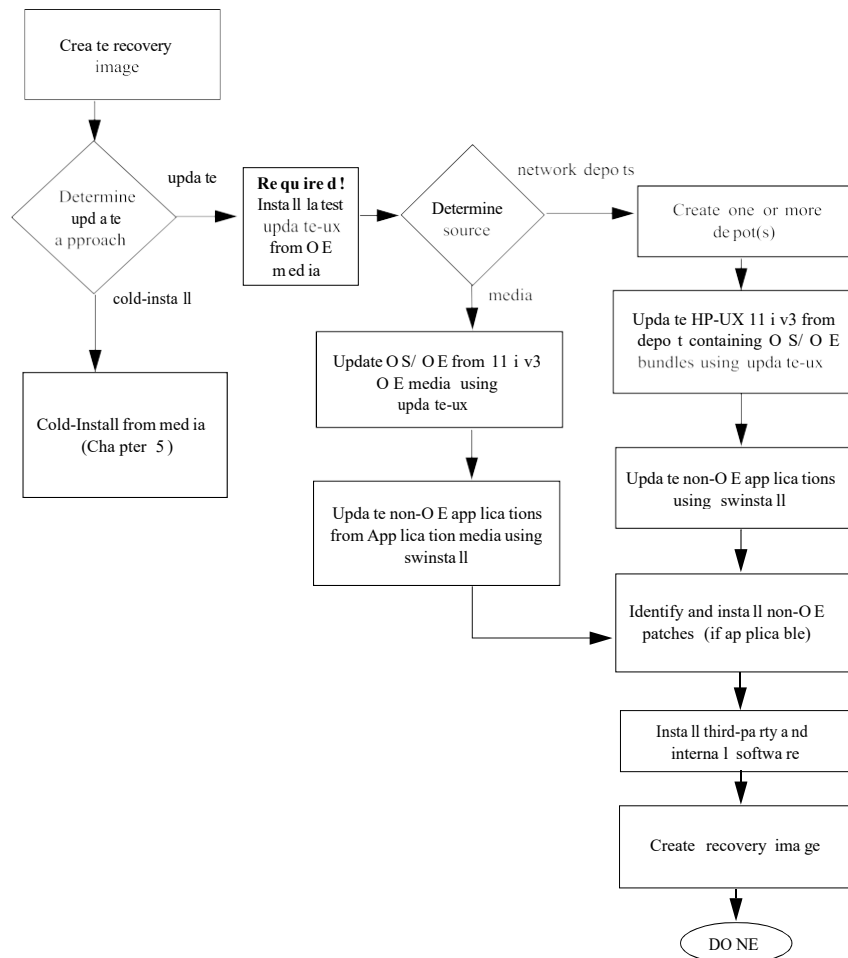


Figure 2: Updating to HP-UX 11i v3



Saving a list of software on the system

Before you start the update process, it might be helpful to save a list of software on the system:

Procedure

1. List the bundles and products installed on your system. Make sure to save the output of the `swlist` command so you can reference it later.
2. `/usr/sbin/swlist -l bundle -l product >/tmp/software_list`

After updating to HP-UX 11i v3, run the `swlist` command again and compare the output to the output you saved from step 1 to determine what software products and bundles still need to be updated.

Rebuilding the kernel

The update can fail if the HP-UX kernel build fails in the starting environment. To ensure that you have a reliable starting point, rebuild the kernel before you update:

1. As root, enter:
`/usr/sbin/mk_kernel -o /stand/vmunix`
2. Fix any problems listed in the `mk_kernel` output.
3. Reboot your system to ensure that your new kernel boots.

Renaming your log files

You must also rename your log files to make it easier to find problems encountered during an update.

1. Enter: `cd /var/adm/sw`
2. As root, rename each log file. For example:
`mv swagent.log swagent_old.log`
3. Enter: `cd /var/opt/swm`
4. Enter: `mv swm.log swm_old.log`

Creating a network depot (optional)

You can create a network depot if you intend to update other systems on the network. A network depot allows you to update all systems on the network without having to move media from system to system. You can also create a network depot if you want to avoid manually swapping media in a single system. For instructions on creating a network depot, see **Creating a network depot (optional)**.

Installing the latest Update-UX

If you are updating from HP-UX 11i v2 to HP-UX 11i v3, Hewlett Packard Enterprise recommends that you manually install the latest HP-UX 11i v3 version of Update-UX before performing your update. This new version of Update-UX provides defect fixes and enhancements not found on the HP-UX 11i v2 version of Update-UX. For example, the HP-UX 11i v3 version of Update-UX allows you to use the preview (`-p`) option (new for HP-UX 11i v3), and it provides the latest manpage for the `update-ux` command.

You must install the Update-UX product (which includes the `update-ux` command) that is included on the Operating Environment DVDs that came with your HP-UX 11i v3 release.



From the DVD media

To install the Update-UX product from the Operating Environment DVDs:

Procedure

1. Mount the DVD. (For instructions, see [Mounting and unmounting the DVD](#).)
2. Using `swinstall`, install the latest version of the Update-UX product on the target system: `swinstall -s /dvdrom Update-UX`

NOTE: Make sure you use the correct case to install the Update-UX product (in title case). This product contains the `update-ux` command (lowercase).

From a depot

The depot example uses the following syntax: `depot_server:depot_path` . For example:

```
swinstall -s depot_server:/var/11iv3/update-depot Update-UX
```

Updating tips

The following table provides tips, recommendations, and cautionary information for the update process.

Table 7: Updating tips

Topic	Tip
Multiple media swaps might be required	The update process might involve multiple media swaps. To avoid manually swapping media, use a network depot. For information, see Creating a network depot (optional) .
Running other commands	During the update process, be careful when running other commands; doing so might cause the commands to function improperly.
All software does not get updated and some products might be removed	Update-UX updates the HP-UX OS and any software specified in additional software bundles available on the source media or depot. Update-UX might not automatically update software that is not contained in an Operating Environment. In addition, Update-UX might not automatically update optional software bundles that have changed names since the last release. If you have added extra software to your existing OE, check to see if it is available in the new OE. If not, you must reinstall this software separately after the update is complete. In addition, software products that are no longer supported on HP-UX 11i v3 either might be automatically removed during the update, or the system might generate messages that warn users that these unsupported software products must be removed before beginning the update process. For a list of products that will be automatically removed upon update, see the Obsolescence Bundle listing in HP-UX 11i v3 Operating Environment software bundles. For further information about deprecated and obsoleted products, see the <i>HP-UX 11i v3 Release Notes</i> (https://www.hpe.com/support/hpux-11iv3-docs)
Persistent DSFs will be created	During an update from HP-UX 11i v2 to 11i v3, existing legacy DSFs are retained and persistent DSFs will be created. Configuration files will not be modified, so system devices will continue to use the existing legacy DSFs. See Next generation mass storage stack .

Table Continued

Topic	Tip
Secure Path not supported on HP-UX 11i v3	Secure Path is no longer supported on HP-UX 11i v3. The new mass storage stack in HP-UX 11i v3 provides integrated Native Multipathing capability. For more information on migrating from Secure Path to Native Multipathing in HP-UX 11i v3, see the “Migrating from HPE StorageWorks Secure Path for Active-Active Disk Arrays to Native Multipathing in HP-UX 11i v3” (https://www.hpe.com/support/hpux-11iv3-docs).
HPE Servicecontrol Manager (HPE SCM) not supported on HP-UX 11i v3	HPE Servicecontrol Manager (HPE SCM) is not supported on HP-UX 11i v3. If your system is running HPE SCM, you must migrate to HPE SIM version 4.2 or later, before updating to HP-UX 11i v3; otherwise the update might fail. What to do Remove HPE SCM before updating to HP-UX 11i v3. If you are updating your system to HP-UX 11i v3 and HPE SCM is installed on your current system and you do not want to run it in the future, you must remove the HPE SCM product before you update to HP-UX 11i v3. Uninstall HPE Servicecontrol Manager using the following command: <code>swremove -x enforce_dependencies=false ID</code> where ID is the product or bundle ID as shown in the following example syntax: <pre>swremove -x enforce_dependencies=false B8339BA</pre> Remove the old product subdirectories by executing the following command: <code>rm -fr /opt/mx /etc/opt/mx</code> You can also remove the database for Servicecontrol Manager, <code>mysql</code>, by executing the following command: <code>swremove mysql</code> You might also choose to migrate HPE SCM version 3.0 to HPE SIM version 4.2 or later, before updating to HP-UX 11i v3. You must be running HPE SCM version 3.0 to perform this update. If you are running an earlier version, you must update HPE SCM to version 3.0 before updating to HPE SIM version 7.4 or later.
NIS+ not supported on HP-UX 11i v3	The NIS+ product is not supported on HP-UX 11i v3. If a system is running NIS+, you must migrate to LDAP BEFORE updating to HP-UX 11i v3; otherwise the update might fail. The NIS+ to LDAP-UX migration tool uses NIS+ commands and utilities for migration. Since the NIS+ commands and utilities are not available on HP-UX 11i v3, the migration tools will not run on a system that has been updated to HP-UX 11i v3. What to do Migrate NIS+ servers and clients to LDAP before updating to HP-UX 11i v3.

Table Continued



Topic

ISEE users must switch diagnostics mode

Tip

Starting with the HP-UX 11i v3 March 2008 release, Online Diagnostics are no longer started by default. Traditionally, HPE Instant Support Enterprise Edition (ISEE) depends on Online Diagnostics (EMS listener) for event detection; however, if it is not started and you notice anomalies in ISEE operation, especially with regard to which events are submitted, you must consult the *ISEE Installation and Configuration Guide*.

What to do

To check which version of diagnostics is running, run the following command:

```
sfmconfig -w -e
```

The preceding command switches the diagnostics mode to "EMS". In this mode, EMS Hardware Monitors are enabled and `SysFaultMgmt` does not monitor any devices.

If the results show that only System Fault Manager is running without Online Diagnostics (EMS listener) on your HP-UX device, and anomalies exist in ISEE operation, especially with regard to which events are submitted, consult the *ISEE Installation and Configuration Guide*.

NOTE: As of the HP-UX 11i v3 September 2008 OEUR, ISEE is no longer included in the OEs. See the *HP-UX 11i Version 3 September 2008 Release Notes* for further information, or click here: https://www.hpe.com/support/HPUX_11i_v3_Release_Notes.

If there is trouble

The `update-ux` command returns an error value when it is not successful:

- 1 - Error during execution; update aborted.
- 2 - Update aborted via user action (keyboard press)

Messages are recorded in `/var/opt/swm/swm.log` and `/var/adm/sw/update-ux.log`.

If you encounter a problem during the update process, review **Harmless messages and known problems** for possible solutions.

Proceeding with updating

After you have completed all necessary preparations and have familiarized yourself with any special issues, you can update your target system. You can update to HP-UX 11i v3 using one of the following methods:

- `update-ux` terminal user interface. See **Updating to HP-UX 11i v3 using the terminal user interface**.
- `update-ux` command line interface. See **Updating to HP-UX 11i v3 using the command line interface**.

Updating to HP-UX 11i v3 using the terminal user interface

This section describes how to update your system using the `update-ux` Terminal User Interface (TUI).

There are seven steps in the TUI `update-ux` process:

Step 1: Start-up

Start the `update-ux` TUI.



Step 2: Select source

Provide the location of the software depot from which the software will be installed.

Step 3: Select OE

Select the OE to which you want to update.

Step 4: Select software

Choose the software in the OE you want to include in your update.

Step 5: Analysis (preview)

Analyze (preview) your update selections to determine if they can be updated successfully.

Step 6: Update

Perform the actual software update.

Step 7: Verify update

Verify that the software update was successful.



TIP: With this TUI, you use the **Arrow**, **Tab**, **Space**, and **Return** keys to navigate.

Step 1: Start-up

1. To start the TUI for an update session, enter:

```
update-ux -i -s /dvdrom
```

The TUI is automatically invoked and the **Update-UX Overview** tab appears. If any screen other than the **Overview** tab appears, press **1** to display the **Overview** tab. This tab provides an overview of the update process. Follow the numbered tabs to update the OE.

Use the navigation legend at the bottom of each screen to navigate and select options on this TUI.

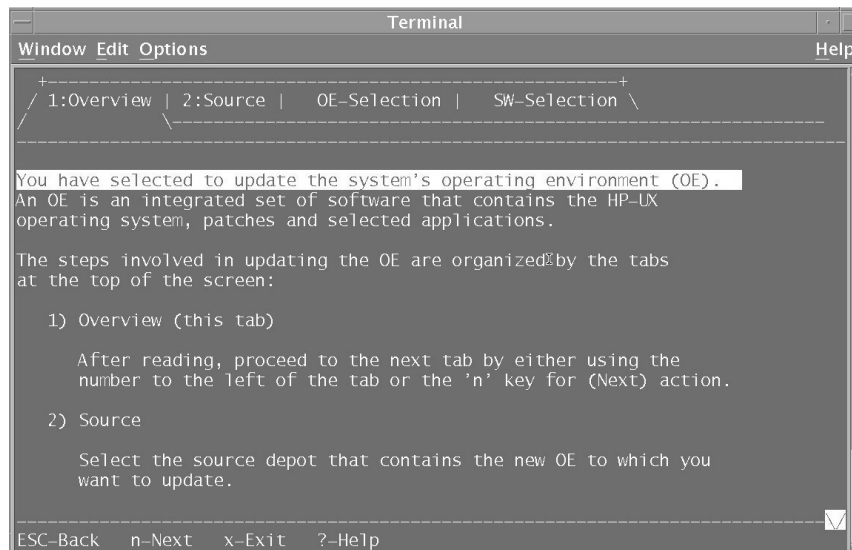


Figure 3: Overview Screen

2. After reviewing the information on the **Update-UX Overview** tab, enter **n** (next) to proceed to the **Source Selection** tab.

Step 2: Select source

The **Source** tab appears. The **Source** tab displays a list of registered source depots on the local host system.



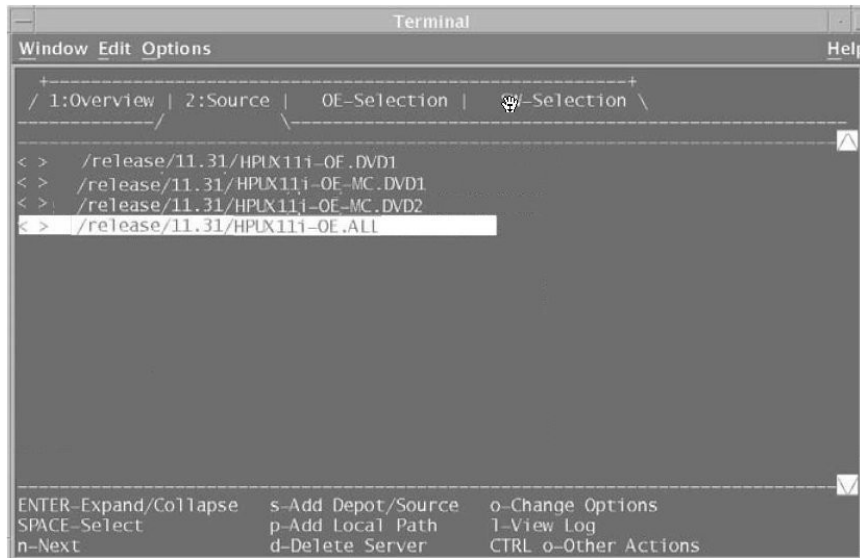


Figure 4: Select Source Tab

1. Specify the source depot that contains the new OE that you want to use to update your target system. The system automatically selects the local host and default depot path.

You can expand any entry that is preceded by the **+** sign. This allows you to view the available depots on the server.

2. If the depot containing the software you want to install does not appear in the list, you can do one of the following:
 - Add another host system to the list of registered source depots by entering **s** (**Add Server/Depot**) and then entering the name of the new source host; or
 - You can also remove a host system from the list of registered source depots by entering **d** (**Delete Server**).
3. Press **Enter**. The system retrieves all the depots available for the host name specified and displays a list of registered depots on the source host.
4. Use the spacebar to select the depot containing the software you want to install.

NOTE: You cannot select content within the OE at this point. Software selection within the selected OE is in the next screen.

5. Enter **n** (next) to confirm your selection and proceed to the **OE-Selection** tab. (The system displays the message *Reading Data from Source* before displaying the next tab.)

Step 3: Select OE

The **OE-Selection** tab appears.

The **OE-Selection** tab displays the list of OEs to which you can update. The OE that best matches the one currently installed on your system is automatically selected:

- If your system already has an HP-UX 11i v3 BOE, HA-OE, VSE-OE, or DC-OE, the same OE will be automatically selected.
- If you are updating from HP-UX 11i v2, or if your system has one of the “old” HP-UX 11i v3 OEs (FOE, EOE, MCOE, or TCOE), Update-UX will select the “new” OE that best matches the “old” OE.

You may choose a different OE by selecting it (which will automatically deselect the other).



❗ **IMPORTANT:** If you choose to select an OE other than the one that was automatically selected, you must adhere to an supported update path. See [Supported update paths](#).

```
Terminal
Window Edit Options Help

+-----+
/ 1:Overview | Source | 3:OE-Selection | 4:SW-Selection \
+-----+

Legend: S=Selected by user, M=Match-selected '.'=Not-selected/Not-i
        N=Newer than system, O=Older than system, I=Installed same

NOTE: From this tab, select the operating environment (OE) that
you wish to update to. If one of the OEs matches the OE
already installed it will be already selected. You may
choose a different OE by selecting the desired OE (which
will automatically de-select the other).

+-----+
. - / HPLX1:/release/11.31/HPLX11i-OE .ALL
<S.> + HPLX11i-OE HP-UX Foundation Operating Environment
<..> + HPLX11i-OE-Ent HP-UX Enterprise Operating Environment

+-----+

ENTER-Expand/Collapse e-Cmd Line Equiv ESC-Back
SPACE-Select/Unselect l-View Log x-Exit
n-Next L-Legend On/Off ?-Help
o-Change Options /-Search
```

Figure 5: OE Selection Tab

With this screen, you can accomplish two tasks: 1) review the contents of an OE you are considering for update, and 2) make the actual OE selection. With the next screen (in Step 4), you will be able to select the individual software bundles.

1. The OE software is divided into three install types: **required**, **recommended**, and **optional**. If you are not familiar with the special meanings of these terms, see their definitions in [HP-UX 11i v3 Operating Environment install/update structure](#). In addition, the software is separated into several product categories. Again, see [HP-UX 11i v3 Operating Environment install/update structure](#) for more information.

On this tab you can review the software contents included within the OE:

Highlight the category you would like to review and press **Enter** to expand and view its contents.

2. When you are ready to select the OE to which you want to update, navigate to the OE listing and press the spacebar to select it. Then enter **n** (next) to confirm your selection and proceed to the **SW-Selection** tab.

The system displays the message: Working...Loading *temporary* update tools that do not affect the running system and will be removed when the OE update is finished.

Step 4: Select software

The **SW-Selection** tab appears. The **SW-Selection** tab displays the software contents of the OE you selected on the **OE-Selection** tab. On the **SW-Selection** tab you can choose the software contents you want to include within the OE.



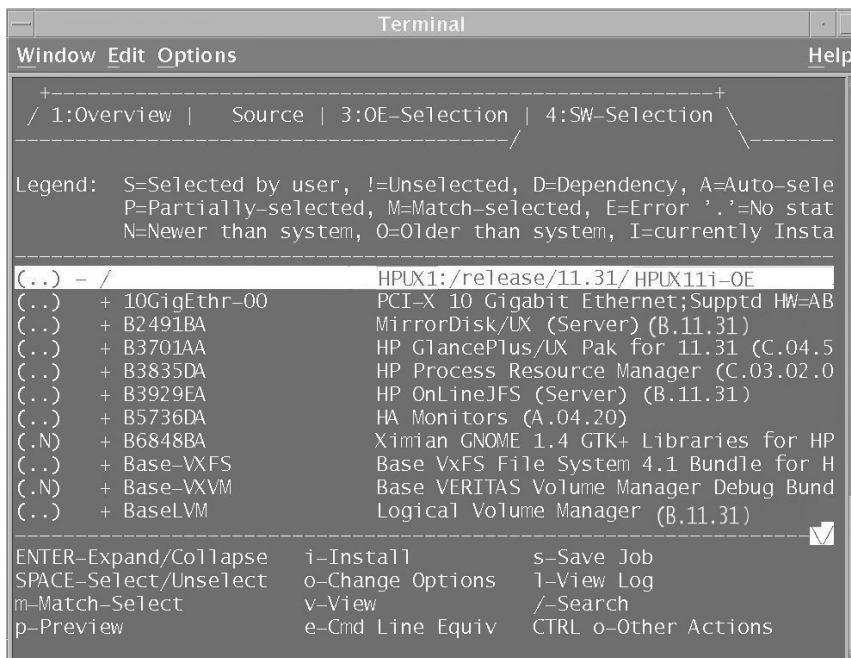


Figure 6: Software Selection Tab

Use the spacebar to select or deselect software from the list.

NOTE: You might observe a few seconds of delay each time you select or deselect a software item on this screen.

Select any **optional** software that you want and deselect any **recommended** (default-installed) software that you do not want. Browse the list, marking your selections.

The bundles and associated product names are listed in **HP-UX 11i v3 Operating Environment software bundles**. For information about new and changed products and features, see the *HP-UX 11i Version 3 Release Notes* appropriate for the release to which you are updating. The document is available on web at <https://www.hpe.com/support/hpux-11iv3-docs>.

CAUTION: Hewlett Packard Enterprise recommends that you do **not** deselect recommended software bundles or remove them from your system unless you know for certain that the software contained in these bundles is not required for your OE.

If you deselect recommended software during the update, the old version of the software you deselected will remain on your system. The old version might not be compatible with the newly updated HP-UX 11i v3 OE. In addition, software might have unstated dependencies. Deselecting software might prevent some products from functioning correctly because they have dependencies on the software you deselected.

The flag **M** (Match) appears when software has been matched to software currently installed on your system. The flag **P** (Partial) might appear if you select only a component of a software object or if such components are automatically selected due to dependencies.

The software products in each category have an associated flag that is displayed in the left-hand column and are described below:

- **S** is selected by the user.
- **!** is deselected by the user.
- **D** is a dependency.
- **A** is automatically selected.

- P is partially selected.
- M is selected because it matches software installed on your system.
- E means an error has occurred when selecting this item.
- . has no status (is not selected or installed).
- N is newer than the software on the system.
- O is older than the software on the system.
- I is currently installed on the system.

Step 5: Analysis (preview)

1. After selecting the software you wish to update, enter **p** (preview) to preview, without modifying the system, the actions that will occur for the update.

The output window appears and begins displaying messages beginning with: Analyzing software to be installed.

In this step, the `update-ux` TUI analyzes the software you have selected.

The Analysis window displays status information about the analysis process. If the preview shows problems, these will be displayed in the Analysis window.



```

xterm
return (exit code "3"). The script location was "/var/tmp/swmRKHhFfpg/SDcateSiE9tKr/catalog/ObsIPQoS/pfiles/checkinstall".
* Running "checkinstall" for "ObsISCSI-SWD,r=B.11.31".
NOTE: The "checkinstall" for "ObsISCSI-SWD,r=B.11.31" gave an Exclude return (exit code "3"). The script location was "/var/tmp/swmRKHhFfpg/SDcateSiE9tKr/catalog/ObsISCSI-SWD/pfiles/checkinstall".
* Running "checkinstall" for "Update-UX.SD-AGENT,r=B.11.31".
NOTE: The Update-UX.SD-AGENT fileset was already installed by the update-ux command. Thus, the Update-UX.SD-AGENT fileset will exclude itself from installation at this time.
NOTE: The "checkinstall" for "Update-UX.SD-AGENT,r=B.11.31" gave an Exclude return (exit code "3"). The script location was "/var/tmp/swmRKHhFfpg/SDcateSiE9tKr/catalog/Update-UX/SD-AGENT.5/checkinstall".
* Running "checkinstall" for "Update-UX.SD-CMDS,r=B.11.31".
NOTE: The Update-UX.SD-CMDS fileset was already installed by the update-ux command. Thus, the Update-UX.SD-CMDS fileset will exclude itself from installation at this time.
NOTE: The "checkinstall" for "Update-UX.SD-CMDS,r=B.11.31" gave an Exclude return (exit code "3"). The script location was "/var/tmp/swmRKHhFfpg/SDcateSiE9tKr/catalog/Update-UX/SD-CMDS.5/checkinstall".
NOTE: A reboot will be required to complete the installation of the selected software.
Analysis succeeded. To return to the previous screen, Press Enter:

```

Figure 7: Analysis Dialog

2. The preview stops after the analysis. Press **Enter** to return to the **SW-Selection** tab.
3. After returning to the **SW-Selection** tab, enter **1** (log) to view the log file, which presents a view of detailed install information.
4. Review any errors, warnings, or notes. Warnings and notes are simply informational. If there are any errors, they will need to be resolved before the update can continue.



Step 6: Update

In this step, the system proceeds with the actual update. At the **SW-Selection** tab, enter **i** (install) to start the update process. After the update has started, the system will typically execute a reboot.

After your system has completed its reboot, you will be prompted to change DVDs if and when needed.

Step 7: Verify update

Use the following steps to verify that the update has completed successfully:

1. To verify that no errors were encountered before the update began, view the contents of the log file: `/var/adm/sw/update-ux.log`. You must see output similar to the following:

```
Command entered: update-ux -s depot_server:/var/lliv3/update_depot SWM
HPUX11i-OE NOTE: Output is logged to '/var/adm/sw/update-ux.log' *
Obtaining some information from the source depot. cp /usr/sbin/
swagent /var/adm/sw/tmp/update-ux compress /var/adm/sw/tmp/update-ux/
swagent uncompress /var/adm/sw/tmp/update-ux/swagent.Z chmod
+x /var/adm/sw/tmp/update-ux/swagent * Copying an SD agent from the source
depot /usr/sbin/swagentd -k /usr/sbin/swagentd -r /usr/sbin/swcopy -s
depot_server:/var/lliv3/update_depot -x logfile=/var/adm/sw/tmp/update-ux/
swcopy.log -x autoselect_dependencies=false -x enforce_dependencies=false -
x mount_all_file systems=false -x register_new_depot=false -x
uncompress_files=true -x reinstall=true SW-DIST.SD-AGENT @ /var/adm/sw/tmp/
update-ux/SWDIST.depot /usr/sbin/swagentd -k /usr/sbin/swagentd -r rm -
f /var/adm/sw/tmp/update-ux/orig_swagent.log rm -f /var/adm/sw/tmp/update-
ux/tmp_swagent.log /usr/sbin/swagentd -k.
```

2. To verify that all appropriate software was updated successfully, view the contents of the logfile: `/var/opt/swm/swm.log`.

You may view the contents of the `swm.log` interactively by typing the following command:

```
swm job -i
```

The system displays a log screen that displays contents of the log file `/var/opt/swm/swm.log`.



```
(job )->Manage Jobs->Log
Verbosity: 3 (ERROR WARNING NOTE INFO)
Mode: tree
-----
===== - 12/19/06 03:00:06 MST BEGIN Operating Environment Update
          (user=root) (jobid=000001) (3 warnings)
          + Choosing Operating Environment
          + Installing Latest OE Update Tools
          + Re-starting Using the Latest OE Update Tools
          + Selecting Software Dependencies, etc. (1 warning)
          - Analyzing Software To Be Installed
            + Running checkinstall Scripts
            + Checking if Reboot Needed
            * Analysis Summary
              - Reboot needed: Yes
              - Kernel build needed: Yes
              - Number of check scripts run: 108 (5 excluded, 0 failed)
              - Install: 72 bundles 470 filesets
              - Update: 30 bundles 806 filesets
            + Running update_prep Scripts
            + Loading Kernel Software
          -----
x-Exit      '-'-Collapse all      i-Increase verbosity
ESC-Back    ENTER-Expand/Collapse  m-Maximum verbosity
'+'-Expand all  d-Decrease verbosity  Ctrl o-Other Actions
```

Figure 8: Log Screen

This log screen provides multiple ways of viewing the information recorded in the log file. You can filter out the messages by verbosity levels, using the action keys at the bottom of the screen.

The following table lists the log files that are generated during an update:

Table 8: Log files generated during update

Log file	Description
<code>/var/opt/swm/swm.log</code>	This log file contains the output from the software selection, analysis and installation phases of the software update. In addition, this log file includes output from all control scripts that run during the update. The <code>swm.log</code> file is the primary log file that you must reference for the results of the update process.
<code>/var/adm/sw/update-ux.log</code>	This log file contains the output from the <code>update-ux</code> script. The <code>update-ux</code> script ensures that the right tools are installed before performing the update.
<code>/var/adm/sw/swagent.log</code>	This log file contains the detailed output from the software installation, including control scripts that run during the update. Note that the <code>swm.log</code> file is a superset of the information found in the <code>swagent.log</code> file.
<code>/var/adm/sw/swagentd.log</code>	These are log files for individual commands that run during the update. Success or failure and output from these commands is recorded in the <code>swm.log</code> file. Unless directed by a message in another log file, there is no need to refer to these log files.
<code>/var/adm/sw/swconfig.log</code>	
<code>/var/adm/sw/swinstall.log</code>	
<code>/var/adm/sw/swmodify.log</code>	
<code>/var/adm/sw/swreg.log</code>	
<code>/var/adm/sw/swremove.log</code>	
<code>/var/adm/sw/swverify.log</code>	



Updating to HP-UX 11i v3 using the command line interface

This section describes ways to use the `update-ux` command to update your system from the Command Line Interface (CLI).

update-ux command

Use the following syntax to run the `update-ux` command:

```
update-ux -s source_location -?-i-p-v-f selection_file -x
option=valuesw_spec ...
```

Table 9: update-ux command options

update-ux command options	Description
-s <i>source_location</i>	Specifies the source containing the new software depot. Possible locations are a local directory, a mounted DVD containing a depot, or a remote system-and-depot combination. All paths used in the <i>source_location</i> must be absolute paths. If <i>source_location</i> is a remote system and depot combination, specify the remote system first, followed by the absolute path to the remote depot, separated by a colon with no spaces. For example: <code>swperf:/var/spool/sw</code>
-?	Prints the usage statement.
-p	Previews an update task by running the session through the analysis phase only.
-v	Turns on verbose output to <code>stdout</code>.
-f <i>selection_file</i>	Reads the list of software selections from <i>selection_file</i> instead of (or in addition to) the command line. This option enables you to select and update optional software or to deselect recommended (default-installed) software.

Table Continued



update-ux command options	Description
<code>-x option=value</code>	Specifies <code>-x</code> options to be applied during the update. For a typical update, no <code>-x</code> options are required. For information on <code>-x</code> options, see the <code>swm (1M)</code> manpage or the <i>Software Distributor Administration Guide</i> .
<code>sw_spec</code>	Software selections support the same syntax as the <code>swinstall</code> command plus the syntax described in the selection syntax section below. The following syntax is supported for <code>sw_spec</code> : <pre> bundle[,version] product[.subproduct][.fileset][,version] !selection [bundle]/[%match] pattern-matching-expression </pre> where <i>version</i> can be: <pre> [,r op revision][,a op arch][,v op vendor] [,c op category][,q=qualifier][,l=location] [,fr op revision][,fa op arch] </pre> where <i>op</i> can be: <pre> =, ==, >=, <=, <, >, or != </pre> The <code>=</code> (equals) relational operator lets you specify selections with the shell wildcard and pattern-matching-expressions: <pre> [], *, ? </pre> The syntax <code>!selection</code> causes that selection to be deselected even if it was listed on the command line as part of other selections.

Updating to an Operating Environment from the command line

The `update-ux` command will automatically choose the OE that best matches the OE currently on your system.

- If your system already has an HP-UX 11i v3 BOE, HA-OE, VSE-OE, or DC-OE, the same OE will be automatically chosen.
- If you are updating from HP-UX 11i v2, or if your system has one of the “old” HP-UX 11i v3 OEs (FOE, EOE, MCOE, or TCOE),

`update-ux`

will choose the “new” OE that best matches the “old” OE.

❗ IMPORTANT:

If you choose to select an OE other than the one that was automatically chosen, you must adhere to an supported update path. See **Supported update paths**.

To update to a different HP-UX 11i v3 OE, you need to specify the OE name in the `update-ux` command. Insert the HP-UX 11i v3 DVD in the local drive mounted at `/dvdrom`. As root, enter:

```
/usr/sbin/update-ux -s /dvdrom OE_identifier
```

The OE identifiers are as follows:

Table 10: OE identifiers

OE identifier	Operating Environment
HPUX11i-BOE	Base OE
HPUX11i-VSE-OE	Virtual Server OE
HPUX11i-HA-OE	High Availability OE
HPUX11i-DC-OE	Data Center OE

 IMPORTANT:

Make sure you install all **new** optional software included in the OE collection that you want at the same time that you do your update. See the next section.

Updating optional software from the command line

To update to HP-UX 11i v3 and specify additional optional software bundles on the command line, enter the name of the OE followed by the names of the optional software bundles. The following example assumes the desired OE is the Base OE:

```
/usr/sbin/update-ux -s /dvdrom HPUX11i-BOE optional_software_bundle_name
```

Completing the update

Upon completing your update, proceed to the next chapters:

- (optional) **Installing applications and patches**
- **Post-install/update tasks and troubleshooting**

 TIP:

After completing the update, store the HP-UX DVDs in a safe place. You might need them later to install additional drivers or other software.



Installing applications and patches

Chapter checklist

- **Installing HP-UX applications**
 - **Tips for installing or updating Hewlett Packard Enterprise applications**
 - **Installing HP-UX applications from the DVDs**
- **Third-party software and hardware**
 - **Third-party (non-Hewlett Packard Enterprise) storage compatibility with HP-UX 11i v3**
 - **Third-party product installation scripts**
- **HP-UX patching and patch management**
 - **Standard HP-UX patch bundles**
 - **Individual HP-UX patches**
 - **HP-UX Software Assistant**

 **IMPORTANT:** Make sure you review the **Harmless messages and known problems** for issues not discussed here that might apply to your system.

Also review the *HP-UX 11i v3 Release Notes* appropriate for your release (<https://www.hpe.com/support/hpux-11iv3-docs>).

NOTE: For historical reasons, the HP-UX 11i v3 Application Software DVDs are also known as the “Application Release” or “AR” DVDs.



TIP: With Dynamic Root Disk (DRD), you can reduce system downtime by:

- Provisioning new HP-UX systems with the DRD rehosting feature
- Performing updates from an older version of HP-UX 11i v3 to HP-UX 11i v3 March 2009 or later

For more information, see **Reducing downtime using Dynamic Root Disk**.

Installing HP-UX applications

Your HP-UX 11i v3 media kit might contain a set of HP-UX Application Software DVDs that provide a wide variety of HP-UX software products. You can install them new or use them to update existing software on your system.

To install applications from the HP-UX Application Software DVDs, you must have an HP-UX 11i v3 OE on your system. If you choose to install or update to a new OE, be sure you have completed the process before you install applications from the HP-UX Application Software DVDs.



CAUTION:

For the majority of products included on the HP-UX Application Software DVDs, all dependencies are provided on the same set of DVDs. There might be exceptions, however. Consult the product's documentation for information about any additional installation requirements.



Tips for installing or updating Hewlett Packard Enterprise applications

- The HP-UX Application Software DVDs have an ASCII file called `DVD_TABLE_OF_CONTENTS` that lists all software products delivered with the DVDs. You can view this ASCII file with `vi`, `emacs`, or any other text editor.

You can find the complete list of applications included in the HP-UX 11i v3 release on the Hewlett Packard Enterprise Software Releases and Media site: <https://www.hpe.com/global/software/releases/releases-media2/HPEredesign/pages/library.html?category=Media%20content>.

(Navigate to **Current HP-UX update releases** or **Prior HP-UX update releases**, then navigate to **HP-UX New/Updated product list** for the appropriate release date).

- To minimize the number of required reboots for installation of applications and patches, you can create a network depot, copy all the products and patches into it, and use the same `swinstall` session. For information, see **Creating a network depot (optional)**.
- For Hewlett Packard Enterprise applications, documentation exists that explains how to install and use an application. The documents might include release notes, readme files, CD and DVD booklets, white papers, and guides. For more information, search for the product at <https://www.hpe.com/support/hpesc>.

Installing HP-UX applications from the DVDs

Procedure

1. Boot HP-UX 11i v3.
2. To determine which products and versions are on your system, use the `swlist` command: `/usr/sbin/swlist -l product`
3. Mount the first (or next) HP-UX Application Software DVD. (For instructions, see **Mounting and unmounting the DVD**.)
4. To install software from the Application Software DVD, use the `swinstall` command. The following example assumes the DVD is mounted at `/dvdrom`: `swinstall -i -s /dvdrom`
For more information, see the `swinstallvolume(1M)` manpage. The `swinstall` program presents an interface for selecting and installing software from the DVD.
5. Unmount and eject the Application Software DVD. (For instructions, see **Mounting and unmounting the DVD**.)
6. Repeat steps 3, 4, and 5 for each DVD.



Third-party software and hardware

This section provides miscellaneous tips and warnings about installing third-party (non-Hewlett Packard Enterprise) software and using third-party hardware. The information in this section does not include any third-party vendor or product-specific information. See the documentation supplied by the vendor for this type of information.

Third-party (non-Hewlett Packard Enterprise) storage compatibility with HP-UX 11i v3

For an up-to-date list of third-party storage devices which have completed interoperability validation under the guidance of Hewlett Packard Enterprise and have been qualified as interoperable with HP-UX 11i v3, see the website **Third Party Mass Storage Devices**:

<https://www.hpe.com/info/MassStorage-Interoperability-Matrix>



WARNING:

If third-party (non-Hewlett Packard Enterprise) storage will be connected to your HP-UX 11i v3 system, Hewlett Packard Enterprise recommends that you contact your third-party storage vendor to determine the compatibility of the storage with HP-UX 11i v3. Check with your third-party storage vendor for information about any prerequisites and limitations with the storage on HP-UX 11i v3.

Third-party product installation scripts

For some third-party product installation scripts, `dtksh` is required for scripts to launch license-acceptance dialogs for Firefox. Therefore, either install CDE to enable the script to run as expected, or execute `/opt/firefox/firefox` and manually accept the Firefox license.



HP-UX patching and patch management

Hewlett Packard Enterprise releases patches to deliver incremental updates to your system. Patches are best known for delivering defect fixes, but can also deliver new functionality and features, enable new hardware, and update firmware. You can use HP-UX patches to update HP-UX software without having to completely reinstall your OE.

NOTE:

When you install or update HP-UX 11i v3, the latest critical patches that shipped with the media are installed on your system. However, other recommended critical or required patches might have become available after the initial release of the media. To manage patches and security bulletins most easily, you can use the HP-UX Software Assistant. For information, see **HP-UX Software Assistant**.

Standard HP-UX patch bundles

The standard HP-UX patch bundles update the HP-UX Core OS and applications on the HP-UX OE media. Standard patch bundles are collections of patches that have been thoroughly tested together. These patches enable new hardware, fix known defects, and enable new features. All patch bundle software is cumulative and completely replaces any previous bundle release for the same operating system (OS) release.

❗ **IMPORTANT:** When installing the standard patch bundles from the OE media, do not use the SD option `reinstall=true`. Doing so might cause superseding patches to be overwritten and might also result in a system freeze while booting. To install a standard patch bundle from the OE media, use the `swcopy` command to create a separate depot for the specific patch bundle.

The following standard patch bundles are provided on the OE DVDs:

- **Hardware Enablement Patch Bundle for HP-UX 11i v3 (HWEEnable11i)**
Provides patches required for new systems and for add-on hardware supported on HP-UX 11i v3, including I/O adapters and devices.
- **Feature Enablement Patch Bundle (FEATURE11i)**
Consists of required core patch files that meet dependencies for new or updated software products. Included patches might also enable new products/features or provide product enhancements. (Also provided on the Application Software DVDs.)

The FEATURE11i bundle does not contain Veritas 6.1 (VxFS/VxVM) patches. Download the latest Veritas 6.1 (VxFS/VxVM) patches from Hewlett Packard Enterprise Support Center (<https://www.hpe.com/support/hpesc>) and install.
- **Quality Pack Patch Bundles**
 - **Base Quality Pack Bundle (QPKBASE)**
Includes all stable, defect-fix patches for the Core OS, graphics, and key networking drivers.
 - **Applications Quality Pack Bundle (QPKAPPS)**
Includes all stable, defect-fix patches for HP-UX Operating Environment (OE) applications.

In addition to the OE DVDs, the standard HP-UX 11i v3 patch bundles are available at the Hewlett Packard Enterprise Support Center (<https://www.hpe.com/support/hpesc>).

❗ **IMPORTANT:** Use the updated Ignite-UX and Update-UX tools from September 2007 OE Update release (or later) to correctly install patches and HP-UX 11i v3 patch bundles. Hewlett Packard Enterprise supports the following cold-install or update cases with a network depot that includes HP-UX patches or patch bundles.

To cold-install HP-UX 11i v3 using a network depot, use any release of HP-UX 11i v3 to create the network depot, and then copy the required patch bundles into that depot. Use Ignite-UX version C.7.26.3 (or later) to cold-install HP-UX 11i v3. Get the latest Ignite-UX version from the IUX website:

<https://myenterpriselicense.hpe.com/cwp-ui/free-software/IGNITEUXB>

To update to the latest release of HP-UX 11i v3, start with the required HP-UX 11i v3 OE bundles from the September 2007 release (or later) to create the depot, and then copy the required patch bundles into the depot.

Documentation

- Hewlett Packard Enterprise recommends reviewing the “readme” document file that is delivered with each patch bundle. The document files can be found in the `OEDocs` directory on the OE DVDs and Hewlett Packard Enterprise Support Center (<https://www.hpe.com/support/hpesc>).
- The *Patch Management User Guide for HP-UX 11.x Systems* provides information and procedures for acquiring and installing standard HP-UX patch bundles.
- For descriptions of changes to the standard HP-UX patch bundles, see the *HP-UX 11i Version 3 Release Notes* (**HP-UX manuals at HPESC**) appropriate to your release.

Individual HP-UX patches

Individual patches can address known problems and security issues, as well as deliver additional software functionality. Individual patches can be downloaded at the Hewlett Packard Enterprise Support Center (HPESC). Once you have used your HPE Passport to sign in at <https://www.hpe.com/support/hpesc>, go to **Product Support > Download options > Patch management** to access patch notes and downloads.

Patches might be released between OEURs. Hewlett Packard Enterprise recommends registering the product with the Support Alert registration process at <https://www.hpe.com/contact> (Click **Email Signup** under **Customer Resources**, and register your product with Support Alert). After registering, you will receive email notification with driver, support, and security alerts, plus software updates customized to your Hewlett Packard Enterprise products.

HP-UX Software Assistant

HP-UX Software Assistant (SWA) is a tool that consolidates and simplifies patch management and security bulletin management on HP-UX systems.

SWA can perform a number of checks including applicable security bulletins and installed patches with critical warnings. Once an analysis has been performed, you can use SWA to download any recommended patches or patch bundles and create a depot ready for installation.

SWA requires an active Hewlett Packard Enterprise support agreement (that includes Software Updates) linked to your HPE Passport. Hewlett Packard Enterprise recommends you use SWA version C.03.2109 or later.

Documentation

The following SWA documents are available at the **HPE Support Center**:

- The *HP-UX Software Assistant Release Notes* provides the features and functionality of the latest release, and known problems.
- The *HP-UX Software Assistant System Administration Guide* provides an introduction to the tool, how to use it, how to use the reporting, and troubleshooting.



Post-install/update tasks and troubleshooting

This chapter provides steps to verify that your system is ready and back in production. It also includes additional tasks you might need to perform, as well as instructions for uninstalling an HP-UX 11i v3 OE and removing applications and patches.

Chapter checklist

- **Verifying the HP-UX cold-install or update**
- **Configuring Operating Environment applications**
- **Migrating to the agile mass storage stack**
- **System tuning for VxFS 6.1**
- **Backing up the system**
- **Uninstalling HP-UX 11i v3**
 - **Removing applications and patches**
- **Diagnostics**
 - **Online diagnostics**
 - **Offline diagnostics**



TIP:

This chapter provides verification information for the HP-UX cold-install and update applications. To verify other vendor applications, see the appropriate vendor documentation.

Verifying the HP-UX cold-install or update

To verify that HP-UX 11i v3 was installed or updated successfully, use the Software Distributor commands `swlist` and `swverify`, as described in this section. For an update, you can also view the results of the update in the log file `/var/opt/swm/swm.log`. See Step 7 in **Updating to HP-UX 11i v3 using the terminal user interface** for more information.

Before you begin, make sure that you have already completed cold-installing or updating to HP-UX 11i v3.



TIP: For help with these commands, see the `swlist (1M)` and `swverify (1M)` manpages, and the *Software Distributor Administration Guide*, which is available **here**.



Part I: Listing all software installed on your system

Procedure

1. List the bundles and products installed on your system: `/usr/sbin/swlist -l bundle -l product > /tmp/software_list`
2. Check the list to see that it contains the bundles and products you wish to have installed on your system.
3. For a cold-install, you might want to compare the output of the `swlist` command above with the contents of the HP-UX 11i v3 Operating Environment DVDs and the Application Software DVDs. To see the contents of a DVD, issue the following command: `/usr/sbin/swlist -l bundle -l product -s /dvdrom > /tmp/dvdcontent`

Part II: Verifying the installed software

You can verify that all software was successfully installed on your system by entering the following command:

```
/usr/sbin/swverify \*
```

The message “Verification succeeded” must be displayed on the console at the end of the operation. Further messages from the verification process can be found in the log files: `/var/adm/sw/swverify.log` and `/var/adm/sw/swagent.log`

Configuring Operating Environment applications

After installing or updating to an HP-UX 11i v3 OEUR, some OE products need post-installation configuration to make them functional. This need might be indicated by a message logged in `/var/opt/swm/swm.log`.

See each product’s installation instructions for details. The locations of documents for many OE products are listed in the *HP-UX 11i v3 Release Notes*, available on web at <https://www.hpe.com/support/hpux-11iv3-docs>. You can also search for product documentation at the Hewlett Packard Enterprise Support Center (<https://www.hpe.com/support/hpesc>).

NOTE: Prior to running the HP-UX vPars and Integrity VM v6.1 product, newly added to the VSE-OE and DC-OE in the March 2012 OEUR, be sure to review the *HP-UX vPars and Integrity VM V6.1 Release Notes* for additional information, including patches required for running the product.

Migrating to the agile mass storage stack

The new mass storage stack for HP-UX 11i v3 is intended to supersede the existing mass storage stack. However, in HP-UX 11i v3 both legacy and persistent DSFs can exist in parallel. Existing legacy DSFs will continue to work as before; they are completely backward compatible, and will not be affected by any persistent DSFs on the same server. (The agile mass storage stack, as well as legacy and persistent DSFs, are discussed in **Next generation mass storage stack**.)

You may choose to migrate to the new agile mass storage stack or you can continue to use the legacy mass storage stack. However, if you want to use the new features of the agile mass storage stack and are not affected by existing limitations, you must consider migrating to the new mass storage stack.

For more information on the new mass storage stack and to migrate from the legacy view to the agile view, see the white papers “The Next Generation Mass Storage Stack: HP-UX 11i v3” and “HP-UX 11i v3 Persistent DSF Migration Guide” (<https://www.hpe.com/support/hpux-11iv3-docs>).



System tuning for VxFS 6.1

If your system has the minimum amount of memory, you must manually set VxFS tunables for optimal performance after cold-installing or updating to HP-UX 11i v3. Two VxFS tunables, `vx_ninode` and `vxfs_bc_bufhwm`, affect system memory consumption. For guidelines on setting them for machines with relatively low RAM, see the *Veritas File System 6.1 Administrator Guide* at <https://www.hpe.com/info/hpux-LVM-VxVM-docs>.

Backing up the system

Now that you have a solid system configuration, you need to back it up. This provides you with a stable configuration that you can use to rebuild the system, if necessary.

For more information, see [Backing up your system](#).

Uninstalling HP-UX 11i v3

If you cannot resolve problems after installing HP-UX 11i v3, then you might want to uninstall it. The process depends upon the install process you followed:

- If you previously created an operating system recovery image with either `make_net_recovery` or `make_tape_recovery` using Ignite-UX, boot the system from that media to return the OS and any archived applications to the previous release. See the Ignite-UX Administration Guide *Ignite-UX Administration Guide* available on web at <https://www.hpe.com/info/ignite-ux-docs>.
- If you used a `drd` clone to create your system recovery image, use the `drd activate` command to boot the unmodified image. See [Choosing drd clone](#).
- If you do not use Ignite-UX or DRD, or do not have a current operating system recovery image:
 - If your applications and data are on a separate disk from the OS, cold-install the previous OS. Doing this ensures a clean OS installation, removing all previous upgrade and patch information.
 - If applications, data, or both are on the same volume with the OS, boot from the previously-saved system recovery tape to return to a previous OS. These expert recovery processes are in the *Ignite-UX Administration Guide*.

Removing applications and patches

To determine which applications are on the system and where they are located, use `swlist`. If you only need to remove applications or patches from the system, use `swremove`. For details, see the *Software Distributor Administration Guide* (<https://www.hpe.com/info/sd-docs>).

Diagnostics

Now that you have installed or updated HP-UX, you can use it to keep your system running. The diagnostics software for Hewlett Packard Enterprise servers helps you troubleshoot and fix problems when a hardware failure occurs.

Online diagnostics

The online diagnostics software, which is always-installed with HP-UX 11i v3, consists of two product bundles:

- `OnlineDiag` (Online Diagnostics)
- `SysFaultMgmt` (System Fault Management [SFM])



These bundles include many tools to help verify, troubleshoot, and monitor PA-RISC and Itanium-based system hardware such as processors, memory, power supplies, fans, interface cards, and mass storage devices. For more information about these products, access the documentation [here](#).

Offline diagnostics

The Offline Diagnostic Environment (ODE) includes a set of offline support tools that enables you to troubleshoot a system that is running without an operating system. The ODE tools are provided on CDs for Integrity systems and 9000 systems. You can order the CDs at no charge or you can download the CD image and burn your own CD.

For instructions on how to order the ODE CD (or download the CD image), see the *Administrator's and User's Guide for Offline Diagnostics*.

Hewlett Packard Enterprise recommends getting the latest CD and update the ODE for improved functionality. The CDs are OS independent and ordered separately from each other and of any operating system media.



Assessing your system and meeting system requirements

This chapter helps you meet various requirements, as well as assess the current state of your system prior to cold-installing or updating to HP-UX 11i v3.

Chapter checklist

- **System requirements**
 - **Supported systems**
- **Determining disk space requirements**
 - **Disk space requirements for a cold-install**
 - **Disk space requirements for an update**
 - **Boot disk size limits**
- **Verifying supported network drivers, mass storage drivers, I/O cards, and storage devices**
- **Firmware updating**
 - **Receiving firmware alerts**
- **Identifying model, release, and installed software**
 - **Identifying the model**
 - **Identifying the release date and Operating Environment**
 - **Identifying installed software**

❗ **IMPORTANT:** Make sure that you review the **Harmless messages and known problems** for issues not discussed here that might apply to your system.

Also review the *HP-UX 11i v3 Release Notes* appropriate for your release (**HP-UX 11i v3**).

System requirements

To cold-install or update HP-UX 11i v3, you must have the following:

- A supported system. See **Supported systems** and **Identifying the model**
- HP-UX 11i v3 OE and Application Software (also known as “Application Release”) DVDs.
- 1.5 GB memory, minimum.

NOTE: The minimum memory limit is intended for running the HP-UX 11i v3 Base OE and minimal applications. Additional memory will be required for optimal performance, and optional software and applications.



NOTE: If your system has the minimum amount of memory, you might need to manually set VxFS tunables for optimal performance **after** cold-installing or updating to HP-UX 11i v3. See **[System tuning for VxFS](#)**.

NOTE: Update-UX has been modified to detect and support physical memory of size greater than 2 TB (up to 4 TB).

Supported systems

NOTE: PA-RRISC systems are not supported with the 2105 OEUR.

For a list of Hewlett Packard Enterprise systems that this release of HP-UX 11i v3 fully supports, see the HP-UX Server Support Matrix at the following website: **<https://www.hpe.com/info/hpuxservermatrix>**.

Additional information about Hewlett Packard Enterprise servers and blades can be found at the following websites:

- HPE BladeSystem: **<https://www.hpe.com/us/en/integrated-systems/bladesystem.html>**
- HPE Integrity Server Family: **<https://www.hpe.com/info/integrity>**
- HPE 9000 Server Family: **<https://www.hpe.com/info/hp9000>**

Determining disk space requirements

Depending on your system's purpose, you must determine how much disk space you will need for each partition/file system before you cold-install or update to HP-UX 11i v3. For example, if you plan to install applications from other vendors, you must modify the size of the `/opt` partition to accommodate their size. Depending on how much disk space is available, you can change the partition/file system size to meet your needs.

NOTE: You can use Dynamic Root Disk (DRD) with Update-UX when you have disk space limitations that would otherwise prevent you from updating your system. By creating a clone, changing volume sizes, and then booting the clone, you can complete the update on the booted clone, with the original system as your backup. For more information, see the white paper "Dynamic Root Disk: Quick Start & Best Practices" (**<https://www.hpe.com/info/drd-docs>**).

Additionally, DRD has other uses, all which can reduce downtime. These include system recovery, system maintenance, patching, testing, and provisioning. See **[Reducing downtime using Dynamic Root Disk](#)** for more information, including links to documentation and a website.

For information about modifying your partition/file system, see the *HP-UX System Administrator's Guide*.

The following list provides additional hints and information to help you determine your disk needs for HP-UX 11i v3. If you need more disk space, be sure to order the equipment and plan on installing it after backing up your current system.

- Record the hardware path to the DVD drive.
- Develop a clear configuration plan, including:
 - file system sizes
 - Swap space size
 - Dump device
 - Disk and file system parameters
 - Mirroring information



- If installing application programs other than those supplied within an HP-UX 11i v3 Operating Environment (OE), consider the vendor's size recommendations.
- When planning disk space, see the *HP-UX System Administrator's Guide*.

Disk space requirements for a cold-install

The disk space requirements listed in the **Minimum disk space recommendations** table are estimates only. Requirements might vary depending on the size of your disk, your type of server, and your Operating Environment. Hewlett Packard Enterprise recommends installing all OS content on one disk, except for mirrors. That disk must be at least 30 GB.

Note the following:

- The table shows recommended minimums.
- Ignite-UX will enforce absolute minimums, but they are smaller than recommended sizes in some cases.
- Ignite-UX will consider available root disk space and adjust sizes to be larger.
- The Ignite-UX UI **File System** tab can be used to set specific sizes.

⚠ CAUTION: If the default size for the `/stand` partition is too small for your environment, do not use the `lvextend` command to increase the size of the `/stand` partition; doing so might render your system unbootable. Instead, use a Dynamic Root Disk (DRD) clone to create an inactive copy of the system on which `/stand` can be extended, or use Ignite-UX recovery to create a recovery image and resize the `/stand` partition.

To use a DRD clone to extend `/stand` on an LVM-managed system, see the white paper “Dynamic Root Disk: Quick Start and Best Practices” (<https://www.hpe.com/info/drd-docs>). See also **Reducing downtime using Dynamic Root Disk**.

You can boot from an Ignite-UX recovery image and resize `/stand` as you recover the system. For help with creating a recovery image, see the *Ignite-UX Administration Guide* available at the Ignite-UX website: [https:// www.hpe.com/info/ignite-ux-docs](https://www.hpe.com/info/ignite-ux-docs).

Table 11: Minimum disk space recommendations

Partition/file system	Recommended space ¹
<code>/</code>	1 GB
<code>/stand</code>	1.5 GB
<code>/var</code>	8.5 GB
<code>/usr</code>	4 GB
<code>/tmp</code>	500 MB
<code>/opt</code>	7 GB

Table Continued

Partition/file system	Recommended space ¹
/home	Depends on application and user requirements. It might make sense to mount a separate file system at /home. ²
/swap	1x - 2x memory size for most systems.
Itanium EFI System (Boot) Partition	500 MB
Itanium HPE Service Partition	400 MB

¹ These are recommended minimums and are estimates only. Requirements for partitions/file systems, especially /var, might vary depending on the size of your disk, your type of server, and your Operating Environment.

² In other words, you might want to put /home on a separate disk and separate volume group. This makes future recovery and upgrade operations easier. By default, /home is created as a separate file system; however, it is part of the root volume group.

Disk space requirements for an update

To ensure a successful update to HP-UX 11i v3, ensure that you have at least as much disk space allocated to the partition/file system and that each partition/file system (/usr, /opt, and /var) has at least 10-20 percent free space to allow for any growth.

The update process will check the disk space requirements. If the system does not meet the requirements, the update will not proceed.

Boot disk size limits

Table 12: Boot disk size limits

HP-UX 11i v3 OEUR	Maximum supported boot disk size			
	Integrity Systems			9000 systems
	LVM boot layout	VxVM	Whole Disk boot layout	All layouts
Prior to March 2011	1 TB	1 TB	1 TB	2 TB
March 2011 and later	2 TB	2 TB	2 TB	2 TB
March 2013 and later	16 TB ¹	2 TB	2 TB	2 TB
May 2018 and later	16 TB	16 TB	2 TB	2 TB

¹ This higher limit is supported only with LVM volume group version 2.2 (and later).

Note that the Ignite-UX product from the respective release (or later versions) is required when boot with a higher limit disk size is attempted. For example, the Ignite-UX product from March 2011 (or later version) is required when install or recovery is attempted on a 2 TB disk. The attempted use of disks, physical volumes, or logical volumes with sizes higher than supported limits as HP-UX boot devices will result in errors or failures.



Also note that the above mentioned limits are applicable for boot disks only. For data disk limits, refer to the respective component (LVM or VxVM) documentation at <https://www.hpe.com/info/hpux-LVM-VxVM-docs>.

Verifying supported network drivers, mass storage drivers, I/O cards, and storage devices

Before installing HP-UX 11i v3, make sure that the drivers, I/O cards, and storage devices on your system are supported.

You can run the `msv2v3check` script to validate whether the drivers, mass storage I/O cards, and mass storage devices installed on your system are supported on HP-UX 11i v3. This script will report if any unsupported drivers, mass storage I/O cards, and mass storage devices are found on your system. This script will also check the minimum firmware versions required for these cards or devices.

You can retrieve the `msv2v3check` script from **Free Software**. For more details on the `msv2v3check` script, see the white paper *HP-UX 11i v2 to 11i v3 MassStorage Stack Update Guide* at [HP-UX 11i v3](#).

For a list of supported and unsupported options, see [HP-UX 11i I/O Cards - Overview](#).

HPE StorageWorks compatibility with HP-UX 11i v3

For up-to-date status and recommended firmware versions for StorageWorks components supported with HP-UX 11i v3, see the HP-UX 11i v3 and StorageWorks Compatibility section at <https://www.hpe.com/info/MassStorage-Interoperability-Matrix>.

Firmware updating

Ensure that your system meets the minimum firmware requirements for the HP-UX 11i v3 (B.11.31) release. New IO adapters and certain virtualization applications may require updated firmware. Check the product documentation for further information.

For information on your options for updating firmware, see **HPE Integrity Servers and HP 9000 Servers Firmware Update Options**. This document includes the collections provided for different Hewlett Packard Enterprise servers. To access one of those collections, select one of the following links and navigate to your server.

- [HPE BladeSystem c7000 Enclosure Models](#)
- [HPE Integrity rx2800 Servers](#)
- [HPE Integrity BL870c i2 Server Blade](#)
- [HPE ProLiant DL360 Gen10 Servers](#)
- [HPE ProLiant DL380 Gen10 Servers](#)

Receiving firmware alerts

1. Go to <https://www.hpe.com/info/alerts>.
2. Follow the instructions to register each of your products.



Identifying model, release, and installed software

Before you cold-install or update to HP-UX 11i v3, you need to identify the model of your system and other information.

Identifying the model

To ensure you are using a supported system, check the model number. To determine the model number of your system, enter:

model

To verify that HP-UX 11i v3 is supported on your system, see **Supported systems**.

For Itanium-based systems, you can identify the model by using the Extensible Firmware Interface (EFI): interrupt the autoboot process in the boot manager, enter the EFI shell, and use the `info sys` command:

Shell> info sys

Information about the model is displayed. For example:

```
SYSTEM INFORMATION
Product Name: server rx2600
Serial Number: sg20220034
UUID: FFFFFFFF-FFFF-FFFF-FFFF-FFFFFFFFFFFFFF
```

Identifying the release date and Operating Environment

To ensure you are following a supported update path, determine the release and Operating Environment currently on your system.

Each HP-UX 11i release has an associated release name and release identifier. The `uname volume(1)` command with the `-r` option returns the release identifier. The following table lists the releases available for HP-UX 11i.

Table 13: HP-UX 11i release identifiers

Release identifier	Release name	Supported processor architecture
B.11.11	HP-UX 11i v1	PA-RISC
B.11.23	HP-UX 11i v2	Intel® Itanium® and PA-RISC ¹
B.11.31	HP-UX 11i v3	Intel® Itanium® and PA-RISC

¹ PA-RISC is supported on HP-UX 11i v2 starting with the September 2004 release.

You can determine the update release date and the Operating Environment by entering the following:

```
# swlist | grep HPUX11i
```

The resulting output will list the current release identifier, update release date, and Operating Environment. For example:

```
HPUX11i-BOE B.11.31.1109 HP-UX Base Operating Environment
```

The above revision string signifies the following:

B.11.31 = HP-UX 11i v3

1109 = September 2011 Update Release



Identifying installed software

Identifying installed software can serve more than one purpose: on your system, it can help you determine what software will get updated or overwritten; and on media, it can help you determine your software choices.

To identify the software products on a system or media, use `swlist`. For example, to show revision and descriptive title of all software installed on a system, enter:

```
/usr/sbin/swlist
```

For more information, see the *swlist(1M)* manpage or the *Software Distributor Administration Guide*, available on the web (<https://www.hpe.com/info/sd-docs>).

NOTE: Third-party software might have been installed onto the system without using Software Distributor. If so, it will not appear in the output of `swlist`. You must consult your own documentation about the system to determine what other applications might be installed.



Support and other resources

Accessing Hewlett Packard Enterprise Support

- For live assistance, go to the Contact Hewlett Packard Enterprise Worldwide website:
<https://www.hpe.com/info/assistance>
- To access documentation and support services, go to the Hewlett Packard Enterprise Support Center website:
<https://www.hpe.com/support/hpesc>

Information to collect

- Technical support registration number (if applicable)
- Product name, model or version, and serial number
- Operating system name and version
- Firmware version
- Error messages
- Product-specific reports and logs
- Add-on products or components
- Third-party products or components

Accessing updates

- Some software products provide a mechanism for accessing software updates through the product interface. Review your product documentation to identify the recommended software update method.
- To download product updates:

Hewlett Packard Enterprise Support Center

<https://www.hpe.com/support/hpesc>

Hewlett Packard Enterprise Support Center: Software downloads

<https://www.hpe.com/support/downloads>

My HPE Software Center

<https://www.hpe.com/software/hpesoftwarecenter>

- To subscribe to eNewsletters and alerts:
<https://www.hpe.com/support/e-updates>
- To view and update your entitlements, and to link your contracts and warranties with your profile, go to the Hewlett Packard Enterprise Support Center **More Information on Access to Support Materials** page:
<https://www.hpe.com/support/AccessToSupportMaterials>





IMPORTANT: Access to some updates might require product entitlement when accessed through the Hewlett Packard Enterprise Support Center. You must have an HPE Passport set up with relevant entitlements.

Related documents

NOTE:

Beginning in August 2011, the web is the primary source of technical documentation for the HP-UX Operating Environments and HP-UX Application Software. Web delivery supports Hewlett Packard Enterprise's Green Business Technology Initiative to reduce packaging and also supports Hewlett Packard Enterprise's goal to keep HP-UX technical documentation up-to-date and easily accessible.

The documentation can be viewed, downloaded, and printed from the web. For pointers to HP-UX documentation, see *A Guide to HP-UX Document Collections* or *A Guide to HP Enterprise Software Documentation* at

<https://www.hpe.com/support/hpux-11iv3-docs>.

Remote support

Remote support is available with supported devices as part of your warranty or contractual support agreement. It provides intelligent event diagnosis, and automatic, secure submission of hardware event notifications to Hewlett Packard Enterprise, which will initiate a fast and accurate resolution based on your product's service level. Hewlett Packard Enterprise strongly recommends that you register your device for remote support.

If your product includes additional remote support details, use search to locate that information.

Remote support and Proactive Care information

HPE Get Connected

<https://www.hpe.com/services/getconnected>

HPE Proactive Care services

<https://www.hpe.com/services/proactivecare>

HPE Datacenter Care services

<https://www.hpe.com/services/datacentercare>

HPE Proactive Care service: Supported products list

<https://www.hpe.com/services/proactivecaresupportedproducts>

HPE Proactive Care advanced service: Supported products list

<https://www.hpe.com/services/proactivecareadvancedsupportedproducts>

Proactive Care customer information

Proactive Care central

<https://www.hpe.com/services/proactivecarecentral>

Proactive Care service activation

<https://www.hpe.com/services/proactivecarecentralgetstarted>

Documentation feedback

Hewlett Packard Enterprise is committed to providing documentation that meets your needs. To help us improve the documentation, send any errors, suggestions, or comments to Documentation Feedback (docsfeedback@hpe.com). When submitting your feedback, include the document title, part number, edition, and publication date located on the front cover of the document. For online help content, include the product name, product version, help edition, and publication date located on the legal notices page.



Harmless messages and known problems

This appendix provides information on harmless messages and problems you might encounter while installing or updating.

Appendix Checklist

- **Messages you can ignore**
- **Known install and update problems**



IMPORTANT:

Be sure to review the latest version of this document. It can be found online at the [HPE Support Center](#) and might include additional harmless messages and known problems.

Messages you can ignore

The following table describes harmless messages currently known to appear while installing or updating to HP-UX 11i v3.

Table 14: Messages you can ignore

When/where seen	Message/action
After updating to HP-UX 11i v3 May 2019 DC-OE, VSE-OE or HA-OE or Cold Installation of HP-UX 11i v3 May 2019 DC-OE, VSE-OE, or HA-OE, you may see messages related to software selection when you run swverify	When you run "swverify B3929IB", you may see the following in <code>/var/adm/sw/swverify.log</code> <pre>Could not apply the software selection "AONLINEJFS,r=B.06.10.01,a=HP-UX_B.11.31_IA/PA,v=HP"; it is not available from depot or root "xxxx:/"</pre> "xxxx:" refers to name of the system that has been updated or where OS is cold installed. What to do AONLINEJFS could not be selected for verification due to its deletion after installation or updation, and configuration of B3929IB bundle simultaneously with Base-VxFS-61. This is expected behavior. Therefore, swverify message can be safely ignored.
When the BOE is installed from the DC-OE, HA-OE, or VSE-OE media, an erroneous listing for HA Monitors might appear	When the BOE is installed from the DC-OE, HA-OE, or VSE-OE media, an erroneous listing for HA Monitors (bundle B5736DA) might be displayed. Even though HA Monitors appears to be part of the BOE, the product is only available on the DC-OE, HA-OE, and VSE-OE. While the bundle wrapper for B5736DA is included in the install, the complete product, itself, is not installed. This behavior only occurs when a BOE is installed from DC-OE, HA-OE, or VSE-OE media. It does not occur if you install the BOE from BOE media. What to do Do not attempt to install or uninstall the B5736DA bundle. You can safely ignore its display.
After upgrading to HP-UX 11i	<pre># Product(s) not contained in a Bundle: #</pre>

When/where seen	Message/action
v3 March 2013 (or later) on PA-RISC systems, you might see unbundle messages for gWLM-Agent and/or vseAssist when running swlist:	<pre>gWLM-Agent A.xx.xx.xx.xx HP Global Workload Manager Agent vseAssist A.xx.xx.xx.xx Virtual Server Environment Configuration Assistant</pre> What to do You can safely ignore this message.
After cold-installing HP-UX 11i v3 March 2012, the following WARNING message might appear on the console when a VxVM rooted system boots up:	<pre>WARNING: VxVM vxdmp V-5-3-0 APM for array type ALUA is not available</pre> What to do You can safely ignore this message.
When installing Network Interfaces Configuration and Network Services Configuration (NetworkConf), you might see a message about patch PHNE_41971:	<pre>The filesets of NetworkConf is dependent on the patch PHNE_41971.</pre> What to do You can safely ignore the message and proceed with the installation. The filesets <code>NETMG2-RUN</code> and <code>LANCRA-SHLIB</code> of the patch <code>PHNE_41971</code> or later are corequisites for the filesets of <code>NetworkConf</code> version <code>B.11.31.12</code> or later. If a later version of patch <code>PHNE_41971</code> is installed, you might see the message during installation of <code>NetworkConf</code>.
When updating a system from HP-UX 11i v2 to HP-UX 11i v3 March 2010 (or later), you might see unbundle messages for JPI 1.4.2 when running swlist:	<pre># Product(s) not contained in a Bundle: # Jpi14 1.4.2.xx.xx Java2 1.4 Netscape Plugin</pre> What to do You can safely ignore unbundle messages. Starting with March 2010, Java 1.4 (SDK, JRE, and JPI) is no longer delivered as part of the OEs and will no longer be updated on the OE media. However, the current Java 1.4 version on your system will remain when you update to HP-UX 11i v3 March 2010 (or later) from HP-UX 11i v2 or an earlier version of HP-UX 11i v3.

Known install and update problems

The following table describes problems currently known to occur while installing and/or updating to HP-UX 11i v3.



CAUTION: Before you install or update to March 1303 or later versions of HP-UX 11i v3 Operating Environments on servers having Oracle RAC 11.2.0.3.3 version, see *Special Installation Instructions* section of *diskowner* volume (1M) PHCO_43004 patch documentation.

Table 15: Known install and update problems

Problem	Description/action
SMH plugins (sgmgr & vmmgr) not working after updating to the OE of May, 2022 or later	After updating HP-UX to version B.11.31.2205 (or later OE such as B.11.31.2305), with Quality Pack and WBEM-Mgmt-Bundle C.21.06, the following features may stop working:: <i>System Management Homepage → Tools → Integrity Virtual Server Manager:</i> The requested application is loading. Please wait, this process may take a few seconds. <i>System Management Homepage → Tools → Serviceguard Manager:</i> The requested application is loading. Please wait, this process may take a few seconds. <i>System Management Homepage → Tools → Serviceguard Manager:</i> The requested application is loading. Please wait, this process may take a few seconds. <i>System Management Homepage → Tools → NPartition Management :</i> The requested application is loading. Please wait, this process may take a few seconds. <i>System Management Homepage → Tools → JSP - Date:</i> The requested application is loading. Please wait, this process may take a few seconds. <i>System Management Homepage → Tools → Servlet - Request Header:</i> The requested application is loading. Please wait, this process may take a few seconds. Cause: The "java.lang.ExceptionInInitializerError" error is caused by a known Java 1.8.0.21 issue documented in customer advisory at https://support.hpe.com/hpesc/public/docDisplay?docId=emr_na-a00115754en_us Workaround: This workaround will need to be applied for Java 1.8.0.21 and higher. Perform either one of the following steps (a) or (b), and then restart SMH. a. Un-comment "crypto.policy=unlimited" or add "crypto.policy=limited" in the file /opt/java8/jre/lib/security/java.security, according to country specific conformance rules.

Problem	Description/action
	b. Remove the two files <code>US_export_policy.jar</code> and <code>local_policy.jar</code>: <pre># mv /opt/java8/jre/lib/security/US_export_policy.jar /tmp # mv /opt/java8/jre/lib/security/local_policy.jar /tmp</pre> c. Restart SMH after the above edits: <pre># /sbin/init.d/hpsmh stop # /opt/hpsmh/bin/hpsmh autostart</pre>
The CIFS client fails to copy files larger than 2GB	Description: IN711992: CIFS client fails to copy files larger than 2GB to CIFS shares on HP-UX 11.31. This issue is seen with CIFS-SERVER B.04.15.00.0x, and is specific to this version. Earlier CIFS-SERVER versions do not exhibit this problem. Resolution: This has been fixed in CIFS-SERVER B.4.18.01.00 (Oct-2024), available on the My HPE SW Center and in the May 2025 OEUR.
CIFS-SERVER reports the following error in <code>syslog</code> : Too many open files	Description: <code>smbd</code> processes have many open files as shown with <code>lssof</code> and the number keeps growing. When the number of opened files exceeds <code>maxfiles_limit</code>, an error message like the one below is logged in <code>syslog</code>: <pre>Too many open files, unable to open more! smbd's max open files = 16424</pre> This is specific to CIFS-SERVER B.04.15.00.0x. Previous CIFS-SERVER versions do not exhibit the same problem. Resolution: This has been fixed in CIFS-SERVER B.4.18.01.00 (Oct-2024), available on the My HPE SW Center and in the May 2025 OEUR.
CIFS-SERVER fails to start with the message: Samba failed to init printing subsystem	Description: After starting CIFS-SERVER on HP-UX, the <code>smbd</code> daemon exits with the error: <pre>daemon failed to start: Samba failed to init printing subsystem, error code 13</pre> This is specific to CIFS-SERVER B.04.15.00.0x. Previous CIFS-SERVER versions do not exhibit the same problem. Workaround: This advisory describes the workaround to be applied: https://support.hpe.com/hpesc/public/docDisplay?docId=a00125579en_us&docLocale=en_US. Resolution: This has been fixed in CIFS-SERVER B.4.18.01.00 (Oct-2024), available on the My HPE SW Center and in the May 2025 OEUR.
After upgrading PERL, an error with DSAU is seen when running <code>csync_wizard</code> in CLI or in the SMH page (Tools > DSAU > Configuration synchronization)	<pre># csync_wizard</pre> Configuration of the cfengine master server is starting. Configuration files have been saved at: <pre>/var/opt/dsau/cfengine/backups</pre> cfengine keys are being created... cfengine keys have been created, now distributing.... Verifying that the master has an entry in the <code>/etc/hosts</code> file on each client...

Problem	Description/action
	Unable to execute the command: /var/opt/dsau/root_tmp/dsau_add_master.pl on host test.domain.xyz Can't exec "perl": Permission denied at /opt/dsau/sbin/perl/csync_wizard line 2865. Workaround: After DSAU is redirected to the correct Perl binary (from: /opt/perl/bin/perl to: /opt/perl2/bin/perl), this error will be resolved. To fix this, change the csync_wizard script in two places to accommodate correct path of Perl binaries. Current Path <pre>2864 @cmd = ("perl \$perl_cmdfile"); 2903 if (!CommandFanout(\$rhost, "perl\$perl_cmdfile", 0)){</pre> New Path <pre>2864 @cmd = ("perl2 \$perl_cmdfile"); 2903 if (!CommandFanout(\$rhost, "perl2\$perl_cmdfile", 0)){</pre>
For SerialSCSI-00, some of the system information collection commands can have an impact on IOs and lead to IOs taking a longer time to complete.	This applies to all controllers supported by SerialSCSI-00. What to do It is recommended running system information collection scripts (using <i>sasmgr</i> (1M)) during light I/O loads.
Process Resource Manager (PRM) fails to start if HPOvPerf 11.40.00 or later is installed.	If HPOvPerf 11.40.00 or later is installed on the system, then PRM startup fails and the following error is displayed during HP-UX startup. "/sbin/rc2.d/S820prm start" has output "ERROR CODE 1" What to do Disable automatic start of perfd at boot time by editing the file /etc/rc.config.d/pctl.default and change value of PCTL_START variable to 0. OR Change the start order of PRM to start it before OVPA and PCTL at boot time: <pre># mv /sbin/rc2.d/S820prm /sbin/rc2.d/S805prm</pre>
The vMouse is not working with Integrated Remote Console (IRC) in HP-UX OS.	The keyboard is functioning, but the mouse is not working. Unable to move the mouse pointer to any side with IRC in HP-UX OS. What to do This is a limitation. HPE Integrated Lights-Out (iLO) 3 for HPE Integrity Servers does not support IRC with the HP-UX operating system. HPE does not recommend using IRC on HP-UX. For more information, see the iLO 3 QuickSpecs, section "IRC and VMedia Feature Support by OS" on page 4.
When CDE-* bundles are removed, the "/sbin/rc2.d/S480sec_late_init start" script might fail	During the removal of CDE-* bundles, you will see the following error in the rc.log file after reboot:

Problem	Description/action
	After containment subsystem configuration is finished. The output from <code>"/sbin/rc2.d/S480sec_late_init start"</code>: <pre>setfilexsec: warning: Ignored the entry for file "/usr/dt/bin/dtsession": No such file or directory ERROR CODE 1 "/sbin/rc2.d/S480sec_late_init start" FAILED</pre> What to do While installing the CDE-* bundles, privileges will be given to <code>/usr/dt/bin/dtsession</code> through <code>configure</code> script. While removing the bundle, privileges are not dropped for the same binary using <code>unconfigure</code> script as a result the error occurs. To avoid the error, run the following command after the removal of CDE-* locale bundles: <pre># setfilexsec -D /usr/dt/bin/dtsession</pre>
Process Resource Manager (PRM) fails to start if HPOvPerf 11.40.00 or later is installed.	If HPOvPerf 11.40.00 or later is installed on the system, then PRM startup fails and the following error is displayed during HP-UX startup. <pre>"/sbin/rc2.d/S820prm start" has output "ERROR CODE 1"</pre> What to do Disable automatic start of <code>perfd</code> at boot time by editing the file <code>/etc/rc.config.d/pctl.default</code> and change value of <code>PCTL_START</code> variable to 0. OR Change the start order of PRM to start it before OVPA and PCTL at boot time: <pre># mv /sbin/rc2.d/S820prm /sbin/rc2.d/S805prm</pre>
DRD updates directly from September 2010 OE (or later) media require the September 2010 OE (or later) versions of DRD, SWM, and SW-DIST	DRD updates directly from media will fail unless you install the September 2010 OE (or later) versions of DRD, SWM, and SW-DIST. What to do To use a media depot to do a DRD update, you must first install the September 2010 (or later) versions of DRD, SWM, and SW-DIST products. These product versions can be installed from either the September 2010 (or later) OE media, or by downloading the latest product versions from the My HPE SW Center Portal. These versions should be installed before the clone is created, as the new versions of DRD, SWM, and SW-DIST must be on the active system and on the clone. For the following example command, ensure that the correct OE DVD is mounted on <code>/SD_CDROM</code>, or that the individual .depot files are available under <code>/SD_CDROM</code> <pre># swinstall -x autoselect_dependencies=false -s /SD_CDROM \ DRD SWM SW-DIST PHCO_36525</pre> Now you can create the clone, then perform an OE update from media on the clone.
Install or update of an older OE with certain patches in a combined depot might result in	If you ignite or update a system to an Operating Environment (OE) older than March 2009 using a combined depot that also contains certain patches, the session might result in the following error messages in <code>swagent.log</code>:

Problem	Description/action
errors	* Installing fileset "PHKL_nnnnn.C-INC,r=1.0" (nnn of nnn). ERROR: Cannot read from the file "/var/adm/sw/products/ProgSupport/C-INC/INFO": No such file or directory (2). ERROR: Rebuilding the Installed Products Database has failed. You may need to retry this operation. The problem is due to tools in pre-March 2009 OEs incorrectly handling certain patch dependency and ancestor relationships. Patches PHKL_38623, PHKL_38733, PHKL_38715, PHKL_38762, and possibly other patches can trigger this problem. These patches are contained in the March 2009 (or later) FEATURE11i bundle, and possibly other March 2009 (or later) patch bundles. Due to header files missing from the ProgSupport.C-INC fileset, a compile of C source code will fail. Many of the header files in the /usr/include directory tree or in /usr/old/usr/include will be missing. A swverify check will not detect this. NOTE: This problem is only applicable if you are installing or updating to HP-UX 11i v3 OE using SD-UX version earlier than March 2009. If you are installing or updating to HP-UX 11i v3 OE with a post March 2009 SD-UX, this problem does not apply. What to do To avoid this problem, Ignite or update to the older OE first. Then install the required patches from the March 2009 (or later) FEATURE11i bundle. Do not install or update an older OE with the FEATURE11i bundle (or referenced patches) in a combined depot. To repair damage that might have resulted from this problem, follow the steps described in QXCR1000902981. For more information, see HP-UX 11.31 - Check_patches.rpt and patching errors.
NFS*MAN filesets produce swverify errors during install/update or removal	After an HP-UX 11i v3 install/update, the swverify command might report that one or more of the following ONCplus.NFS manpage files is missing: <pre> /usr/share/man/man1m.Z/portmap.1m /usr/share/man/man1m.Z/umount_nfs.1 /usr/share/man/ja_JP.eucJP/man1m.Z/umount_nfs.1m /usr/share/man/ja_JP.SJIS/man1m.Z/umount_nfs.1m </pre> The hard links to the affected manpages were incorrectly removed by the install/update process. What to do As superuser, recreate the missing links by executing the following commands, as needed: <pre> # cd /usr/share/man/man1m.Z # ln rpcbind.1m portmap.1m # ln mount_nfs.1m umount_nfs.1m # cd /usr/share/man/ja_JP.eucJP/man1m.Z # ln mount_nfs.1m umount_nfs.1m # cd /usr/share/man/ja_JP.eucJP # ln mount_nfs.1m umount_nfs.1m </pre>

Installing VxFS, OnlineJFS, LVM, and VxVM

Starting with HP-UX 11i v3 May 2018 OEUR, VxFS 6.1 and VxVM 6.1 are the bundled products. VxFS 6.1 is required VxFS product which is always selected in the Ignite-UX tool for installation. VxVM 6.1 is an optional VxVM product which must be explicitly selected in the Ignite-UX tool for installation. The default selection for all systems is VxFS 6.1 plus LVM.



IMPORTANT: VxFS/VxVM 6.1 remains unsupported on PA-RISC platforms.

VxFS 4.1 and VxVM 4.1 are not supported on Intel Itanium 9300 series processors or later.

Table 16: VxFS and VxVM server compatibility matrix for HP-UX 11i v3

VxFS / VxVM Version	Pre-Itanium 9500 based servers	Itanium 9500 based servers	Itanium 9700 based servers
5.0 *	Yes	Yes	No
5.0.1 *	Yes	Yes	No
5.1 SP1 *	Yes	Yes	Yes
6.1 (2018 and 2019 OEUR)	No	Yes	Yes
6.1 (2020 OEUR and later)	Yes	Yes	Yes

* **NOTE:** VxFS/VxVM **5.0, 5.0.1 and 5.1 SP1** reached end of Standard Support on 31 Dec 2022. For more information, see this [support communication](#).

Hewlett Packard Enterprise recommends moving to VxFS 6.1 and OnlineJFS 6.1 as soon as possible to ensure that you receive the most comprehensive support and enhanced scalability, manageability, high-availability, and performance.

What is new for delivery of VxFS, OnlineJFS, LVM, and VxVM

HP-UX 11i v3 May 2025 OEUR includes the following products:

- **VxFS 4.1** (Base-VxFS bundle)—required (always-installed) in all OEs
- **OnlineJFS 4.1** (B3929EA bundle)—optional in DC-OE, VSE-OE, and HA-OE
- **VxFS 6.1** (Base-VxFS-61 bundle)—required (always-installed) in all OEs
- **OnlineJFS 6.1** (B3929IB bundle)—recommended (default-installed) in DC-OE, VSE-OE, and HA-OE
- **Logical Volume Manager B.11.31.2407** (BaseLVM bundle)—required (always-installed) in all OEs
- **VxVM 6.1** (Base-VxVM-61 and Base-VxTools-61 bundles)—optional in all OEs





WARNING:

The VRTSvxfs 6.1.0.8220 patch PHKL_44915 in the Quality Pack Patch bundle included with the May, 2023 OE Media has a patch warning. For details refer to the warning note posted against PHKL_44915. Customers are recommended to install the replacement patch, VRTSvxfs 6.1.0.8230 PHKL44935. All patch details are available at the [HPESC Patch Management portal](#).

VxFS 6.1 now required (always-installed)

With September 2008 OEUR, VxFS 4.1 and 5.0 were included in the OEUR and AR media, and VxFS 4.1 was installed by default. With September 2009 OEUR, VxFS 4.1 and 5.0 were still included in the release, but VxFS 5.0 was installed by default.

With September 2011 OEUR, VxFS 4.1 and 5.0.1 were included in the OEUR and AR media. VxFS 5.0.1 replaced 5.0 and was a recommended (default-installed) product. Although VxFS 4.1 was a required (always-installed) product, installation defaulted to VxFS 5.0.1. If you preferred to stay on VxFS 4.1, you could explicitly deselect VxFS 5.0.1.

With March 2012 OEUR, VxFS 4.1 and 5.0.1 were included in the OEUR and AR media. VxFS 5.0.1 was a **required** (always-installed) product. That means that you could not deselect VxFS 5.0.1 (Base-VxFS-501) in the Ignite-UX tool. If you want a configuration that does not include VxFS 5.0.1, see [Other supported configurations](#).

With March 2014 OEUR, VxFS 4.1 and 5.1 SP1 are included in the OEUR and AR media. VxFS 5.1 SP1 replaced VxFS 5.0.1. VxFS 5.1 SP1 is a **required** (always-installed) product. That means you can no longer deselect VxFS 5.1 SP1 (Base-VxFS-51) in the Ignite-UX tool. If you want a configuration that does not include VxFS 5.1 SP1, see [Other supported configurations](#).

Starting with May 2018 OEUR release, VxFS 4.1 and 6.1 are included in the OEUR and AR media. VxFS 6.1 replaced VxFS 5.1 SP1. VxFS 6.1 is a **required** (always-installed) product. That means you can no longer deselect VxFS 6.1 (Base-VxFS-61) in the Ignite-UX tool. If you want a configuration that does not include VxFS 6.1, see [Other supported configurations](#).

VxVM 5.1 SP1 replaced by VxVM 6.1

Starting with September 2011 release, VxVM 5.0 was replaced by VxVM 5.0.1, and VxVM 5.0 was no longer included on the OEUR and AR media. Note that VxVM 5.0.1 was optional and LVM was installed by default. To install VxVM 5.0.1, you must select it in Ignite-UX UI.

Starting with March 2014 release, VxVM 5.0.1 has been replaced by VxVM 5.1 SP1, and VxVM 5.0.1 is no longer included on the OEUR and AR media. Note that VxVM 5.1 SP1 is still optional and LVM is installed by default. To install VxVM 5.1 SP1, you must select it in Ignite-UX UI.

Starting with May 2018 release, VxVM 5.1 SP1 has been replaced by VxVM 6.1, and VxVM 5.1 SP1 is no longer included on the OEUR and AR media. Note that VxVM 6.1 is still optional and LVM is installed by default. To install VxVM 6.1, you must select it in Ignite-UX UI.

Supported 6.1 configurations

During cold-install or update, **supported** VxFS 6.1 and VxVM 6.1 installations are achievable with the proper selections in the Ignite-UX tool.

VxFS and VxVM installation through cold-install

Ignite-UX C.7.27.2 software is bundled in HP-UX 11i v3 May 2023 OEUR. Ignite-UX C.7.27.2 software or later must be used for cold installation of HP-UX 11i v3 May 2023 OEUR with VxFS 6.1 and VxVM 6.1. The limitation does not apply for cold installation of customized depots on HP-UX 11i v3 May 2023 OEUR created with earlier versions of VxFS & VxVM.

VxFS 6.1 with LVM configuration



A default cold-install results in an LVM system with VxFS 6.1 and OnlineJFS 6.1 installed. (OnlineJFS is only available on the DC-OE, VSE-OE, and HA-OE, so it will not be installed with the BOE.) No additional selections in Ignite-UX user are required to cold-install this configuration.

VxFS 6.1 with VxVM 6.1 configuration

To cold-install VxFS 6.1 with VxVM 6.1, manually select **VxVM with VxFS environment** (in the Ignite-UX **Basic** tab) and manually select VxVM 6.1 (Base-VxVM-61 and Base-VxTools-61) in the **Software** tab for install. Do both (explicitly select the VxVM “environment” and the VxVM 6.1 bundles [Base-VxVM-61 and Base-VxTools-61]) or Ignite-UX fails with the following error:

```
ERROR: The system has VxVM configured, but the VERITAS Volume Manager
software was not selected for loading. You are required to load it in order
for the installation to succeed.
Use the software selection screen to mark the appropriate VxVM software for
loading.
```

VxVM and VxFS installation with update-ux

The upgrade path to VxFS 6.1 is supported only from VxFS 5.1 SP1. If you are on an older version of VxFS, you are required to upgrade to VxFS 5.1 SP1 before upgrading to VxFS 6.1. Ensure that the file system disk layout is at least at VxFS DLV 5 (except '/') and VxVM disk group version is at least at VxVM DGV 160 before upgrading to VxFS 6.1. 5.1 SP1 supports 4, 5, 6, 7, 8 as DLV. 6.1 supports 5, 6, 7, 9, 10. / is created with DLV 6. /stand is created with DLV 5.

NOTE: If you want to remain on currently installed Veritas version, you must explicitly de-select Base-VxFS-61, BaseVxVM-61 & B3929IB for a successful OE update. This will ensure that currently installed Veritas version is not updated to VxFS 6.1 and VxVM 6.1.

All of the configurations described in **VxFS and VxVM installation through cold-install** can also be achieved when updating your system with `update-ux`.

❗ **IMPORTANT:** If you have created any VxFS 5.1 SP1 file system with disk layout version 4 or version 8, use the `vxfsconvert` or `vxupgrade` command to upgrade the disk layout to version 5 or version 10 before upgrading to VxFS 6.1 on HP-UX 11i v3. For more information, see the *Veritas 6.1 Installation Guide* at [https:// www.hpe.com/info/hpux-LVM-VxVM-docs](https://www.hpe.com/info/hpux-LVM-VxVM-docs).

VxFS 6.1 with LVM configuration

As with cold-install, the update process will default to VxFS 6.1 with LVM.

VxFS 6.1 with VxVM 6.1 configuration

As with cold-install, updates to September 2011 OEUR and beyond will not install VxVM by default. To update to the VxFS 6.1 with VxVM 6.1 configuration, you must explicitly select VxVM 6.1 in the `update-ux` command line:

```
# update-ux -s depot_path Base-VxFS-61 Base-VxVM-61 Base-VxTools-61
```

NOTE: If VxVM is not selected for installation during update and VxVM is not in use, update scripts built into the September 2011 OEUR and beyond will automatically remove any unused older versions of VxVM from your system.



Summary of cold-install and update scenarios

The following table summarizes various cold-install and update scenarios. Please note that the 2023 OE media includes Ignite-UX version C.7.27.2, which is a later than the versions listed in the table below.

Table 17: Cold-installation using HP-UX 11i v3 2023 OE media

Platform	Ignite-UX Version	Comments
Intel Itanium 9500 Processor Series-based platforms or later	C.7.23.100 or later	Cold-installation succeeds
	C.7.22.175 (available as web download)	Recommended to install only HP-UX 11i v3 2018 OE. To install HP-UX 11i v3 2020 OE or later, upgrade the Ignite-UX server to C.7.24.100 or later.
	C.7.22.150 (available as part of HP- UX 11i v3 2018 OE media)	This version is suspended and unsupported.
	C.7.21.xx or earlier	Upgrade Ignite server with Ignite-UX software version C.7.24.100 or later for cold-installation.
Intel Itanium 9300 Processor Series-based platforms or earlier	C.7.24.100 or higher	Cold-installation succeeds
	C.7.23.100 or C.7.22.175	Cold-installation fails with the following message: ERROR: Base-VxFS-61 must be installed on Intel Itanium 9500 series based platforms or later Action: Upgrade Ignite server with Ignite-UX software version C.7.24.100 or later and try cold-installation again.
	C.7.22.150 (available as part of HP- UX 11i v3 2018 OE media)	This version is suspended and unsupported.
	C.7.21.xx or earlier	Upgrade Ignite server with Ignite-UX software version C.7.24.100 or later for cold-installation.

Table 18: Upgradation of OE using HP-UX 11i v3 May 2023 OE media

Platform	VxFS/VxVM upgrade option	Comments
Intel Itanium Processor Series-based platforms	Upgrade to VxFS/VxVM 6.1 ¹	Upgrade OE using the following command succeeds: update-ux -s <depot_path>
	Do not upgrade to VxFS/VxVM 6.1	Upgrade OE using the following command succeeds: update-ux -s <depot_path> !Base-VxFS-61 !Base-VxVM-61 !Base-VxTools-61 !B3929IB

¹ The upgrade path to VxFS/VxVM 6.1 is supported only from VxFS/VxVM 5.1 SP1. If you are using an older version of VxFS/VxVM, then upgrade to VxFS/VxVM 5.1 SP1 before upgrading to 6.1 and ensure the following:

1. file system disk layout is at least at VxFS DLV 7 (except '/' and '/stand')
2. VxVM disk group version is at least at VxVM DGV 160



Past supported configurations – no longer supported

The following text describes configurations that were supported until December 2022. Please see the VxVM / VxFS **support communication** for further information.

VxFS 6.1 and VxVM 6.1 are bundled in the HP-UX 11i v3 May 2021 OEUR. Hewlett Packard Enterprise recommends migrating to VxFS 6.1 and VxVM 6.1 at the earliest to continue receiving comprehensive support, enhanced scalability, manageability, high-availability, and performance.

If you continue using VxFS and VxVM versions 4.1, 5.0, 5.0.1, or 5.1 SP1, see the *Installation of non-default VxFS and VxVM software version on HP-UX 11i v3 2021 Operating Environment Update Release technical paper* at **HPE Support Center**. This document includes detailed instructions for the following configurations (no longer supported) and other considerations:

- LVM with VxFS 4.1 Configuration
- VxVM 4.1 with VxFS 4.1 Configuration
- Updates from HP-UX 11i v2 with OnlineJFS 4.1 to HP-UX 11i v3 with OnlineJFS 4.1
- Updates to HP-UX 11i v3 with VxVM 4.1
- LVM with VxFS 5.0 Configuration
- VxVM 5.0 with VxFS 5.0 Configuration
- Updates from HP-UX 11i v2 with OnlineJFS 5.0 to HP-UX 11i v3 with OnlineJFS 5.0
- Updates to HP-UX 11i v3 with VxVM 5.0
- LVM with VxFS 5.0.1 Configuration
- VxVM 5.0.1 with VxFS 5.0.1 Configuration
- Updates from HP-UX 11i v2 with OnlineJFS 5.0 to HP-UX 11i v3 with OnlineJFS 5.0.1
- Updates to HP-UX 11i v3 with VxVM 5.0.1
- LVM with VxFS 5.1 SP1 Configuration
- VxVM 5.1 SP1 with VxFS 5.1 SP1 Configuration
- Updates from HP-UX 11i v2 with OnlineJFS 5.0 to HP-UX 11i v3 with OnlineJFS 5.1 SP1
- Updates to HP-UX 11i v3 with VxVM 5.1 SP1



Unsupported system configurations

NOTE:

Starting from January 2023, version 6.1 of VxFS / VxVM is the only supported version on HP-UX 11i v3. No other configurations are supported. The following text is retained for historical reference only.

Many different configurations are selectable at update time, but not all them result in supported system configurations. For this reason, pre-update scripts built into the September 2011 OEUR and beyond will block certain updates before they start. This prevents updates into unstable configurations. The scripts print an error message and the error can be resolved by restarting the update with different software selections.

For example, if your existing 11i v3 system has VxFS 4.1 and VxVM 4.1 configured, and you attempt to update to September 2011 OEUR (and beyond) with only VxFS 5.1 SP1 selected, the OEUR scripts block the update. This is done because this update would result in a system that has VxFS 5.1 SP1 and VxVM 4.1 installed—an unsupported combination of versions. To resolve this error, simply restart the update after selecting both VxFS 5.1 SP1 and VxVM 5.1 SP1 in `update-ux` so that the update results in matching 11i v3 versions of VxFS and VxVM.

Other unsupported paths will also be blocked by the scripts of September 2011 OEUR (and beyond) and can be resolved in similar ways. (The other most common blocked update occurs when HP-UX 11i v2 VxVM is in use on a system but you have forgotten to select VxVM 5.1 SP1 at update time.)

VxFS-6.1 and VxVM-6.1 included in HP-UX 11i v3 May 2018 & 2019 OEUR are supported and installable only on Intel Itanium 9500 Processor Series-based platforms or later, OE update or cold installation of HP-UX 11i v3 May 2018 and 2019 OEUR with VxFS 6.1 and VxVM 6.1 on earlier platforms is not supported. This platform restriction of support only for Intel Itanium 9500 or later Processor series-based platforms has been removed in HP-UX 11i v3 May 2020 OEUR. Starting with HP-UX 11i v3 May 2020 OEUR, VxFS 6.1 and VxVM 6.1 are supported and installable on all Intel Itanium Processor Series-based platforms.

NOTE: PA-RISC is not supported with the May 2021 OEUR and pre-update is not allowed.



HP-UX 11i v3 Operating Environment software bundles

HP-UX 11i v3 Operating Environments (OEs) allow you to purchase, install, and maintain a package of up to 160 or more software components as one. This built-in integration means you reduce risks, time, and costs through faster deployment and simpler lifecycle management. For brief overviews of the HP-UX 11i v3 OEs, see **HP-UX 11i v3 Operating Environments**. For more detailed information on the HP-UX 11i v3 OEs, see <https://www.hpe.com/info/hpux11iv3>.

HP-UX 11i v3 Operating Environment install/update structure

HP-UX 11i v3 has an OE structure that gives flexibility in managing the products you want to install/update on your system.

HP-UX 11i v3 software product categories

The OE structure for HP-UX 11i v3 separates software components into several product categories, making it easier and more reliable for you to incrementally update your system with OE software components.

Table 19: HP-UX 11i v3 software product categories

Software category	Description
CompilersDevelopment	Compilers and Development Tools
CoreOS	Core HP-UX Functionality
Desktop	Desktop Environments
Diskfile systems	File Systems and Volume Management
Drivers	I/O Drivers
HighAvailability	High Availability
InetServices	Internet Services
Internet	Internet Software Tools
Interoperability	Computing Interoperability Tools
Java	Java Tools and Utilities
Localization	Localization
Manuals	HP-UX Manual Pages (manpages)
Migration	Migration to HP-UX Tools
Networking	Networking Infrastructure
Obsolescence	Product Obsolescence
Performance	Performance Tools
Security	Security Tools
SecurityChoices	Security Level Choices
SupportTools	Diagnostic and Support Tools
SystemManagement	System Management Tools
Utilities	Miscellaneous Utilities
OE Optional	All optional (selectable) bundles in the OE
OE Recommended	All recommended (default-installed) bundles in the OE
OE Required	All required (always-installed) bundles in the OE



HP-UX 11i v3 software installation types

Each software product category contains software bundles that are further separated into the following installation types:

Table 20: HP-UX 11i v3 software installation types

Installation Type	Description
Required (always-installed)	Software and administration tools needed to create a minimally bootable and maintainable system. Only the drivers for basic hardware are included in this category. You might need to install additional drivers to use all hardware components. Software in this category cannot be deselected. The following table lists the required software in all OEs: Table 21: HP-UX 11i v3 required software
Recommended (default-installed)	Software bundles that Hewlett Packard Enterprise recommends you install because they fulfill software dependencies, if any exist. You can, however, manually deselect the bundles before you install or update your system. To install a minimal operating system configuration (base OS) you can deselect the recommended bundles. Only the minimal core OS will be installed on your system when you deselect the recommended bundles. ⚠ CAUTION: Hewlett Packard Enterprise recommends that you do not deselect recommended software bundles or remove them from your system unless you know for certain that the software contained in these bundles is not required for your operating environment. Software might have unstated dependencies. Deselecting software might prevent products with dependencies on the software you deselected from functioning correctly. The following tables list the recommended software in each OE: • Table 22: HP-UX 11i v3 BOE recommended software • Table 24: HP-UX 11i v3 VSE-OE recommended software • Table 26: HP-UX 11i v3 HA-OE recommended software • Table 28: HP-UX 11i v3 DC-OE recommended software
Optional (selectable)	Software bundles that are not installed or updated by default. You must manually select these bundles before you install or update your system. The following tables list the optional software in each OE: • Table 23: HP-UX 11i v3 BOE optional software • Table 25: HP-UX 11i v3 VSE-OE optional software • Table 27: HP-UX 11i v3 HA-OE optional software • Table 29: HP-UX 11i v3 DC-OE optional software



HP-UX 11i v3 Operating Environment contents

The following sections list the products and bundle names of each Operating Environment.

HP-UX 11i v3 Base Operating Environment

The HP-UX 11i v3 Base Operating Environment (BOE) is the standard OE from which the Virtual Server OE, High Availability OE, and Data Center OE have been derived by adding appropriate applications. The HP-UX 11i v3 BOE includes all the features of the original HP-UX 11i v3 Foundation OE.

Along with the 64-bit HP-UX operating system, the BOE contains the features listed in the following tables:

- **Table 21: HP-UX 11i v3 required software**
- **Table 22: HP-UX 11i v3 BOE recommended software**
- **Table 23: HP-UX 11i v3 BOE optional software**

For an overview of the changes to these features and products, see the [HP-UX 11i Version 3 Release Notes](#).

For definitions of **required**, **recommended**, and **optional**, see [HP-UX 11i v3 software installation types](#).

Table 21: HP-UX 11i v3 required software

Required software product	Bundle name
CommonIO	CommonIO
Drivers	
10GigEthr-02	10GigEthr-02
GigEther-00	GigEther-00
GigEther-01	GigEther-01
IEther-00	IEther-00
RAID-01	RAID-01
scsiU320-00	scsiU320-00
SerialSCSI-00	SerialSCSI-00
USB-00	USB-00
HP-UX 11i v3 Online Diagnostics	OnlineDiag
HP-UX Mail Server (Sendmail)	HPUX-MailServer
HPUXMinRuntime*	HPUXMinRuntime
* HP-UX 11i v3 operating system software. This is a core bundle.	

Table Continued

Required software product**Bundle name**

HP-UX nPartition Configuration Commands

NParCmds

Logical Volume Manager

BaseLVM

Obsolescence Bundle (OBSCOLESCENCE)

Required during an OE update to remove HP-UX products that are obsolete or unsupported in HP-UX 11i v3. It is automatically removed from the system at the end of the OE update process. It is not needed and not installed during a cold-install. The following products are removed:

Obsolete DMI	ObsDMI
Obsolete SCRs	ObsSCR
Obsolete HPE CIFS Client	ObsCIFS-Client
Obsolete HP DCE Core Admin	ObsDCE-CoreAdmin
Obsolete HP DCE Security Server	ObsDCE-SEC-Srv
Obsolete HP DCE CDS Server	ObsDCE-CDS-Srv
Obsolete HP EISA 100BaseT Driver	Obs100BT-EISA
Obsolete HP EISA FDDI Driver	ObsFDDI-EISA
Obsolete HP EISA TokenRing Driver	ObsTOKEN-EISA
Obsolete HP Frame Relay Link software	ObsFR-HPerf
Obsolete HP HPPB 100BaseT Driver	ObsLAN100BT-HPPB
Obsolete HP HPPB FDDI Driver	ObsFDDI-HPPB
Obsolete HP HPPB TokenRing Driver	ObsTOKEN-HPPB
Obsolete HP HSC FDDI Driver	ObsFDDI-HSC
Obsolete HP HSC ATM Driver	ObsATM2HSC
Obsolete HP-PB ATM Driver	ObsATMPB
Obsolete HP-PCI ATM	ObsATMCORE

Table Continued

Required software product	Bundle name
Obsolete HP PCI FDDI Driver	ObsFDDI-PCI
Obsolete HP PCI TokenRing Driver	ObsPCITR
Obsolete HP-UX IPQoS	ObsIPQoS
Transition of obsolete product	ObsPPU
Obsolete HP ISCSI-SWD	ObsISCSI-SWD
Obsolete Java1.2 JDK/JRE/JPI/Java3D	ObsJ12
Obsolete Java 1.3 JDK/JRE/JPI/Java3D	ObsJ13
Obsolete Java3D for Java 1.4	ObsJ3d
Obsolete HPMPI and MLibPROD products	ObsMLIBMPI
Obsolescence product for Mozilla	ObsMozilla
Obsolescence product for Netscape browsers	ObsNsBrws
Obsolete ObAM	ObsOBAM
Obsolete HP I2O RAID Product	ObsI2ORAIID
Obsolete Technical System Configuration	ObsTC-SysSetup
Obsolete HP-UX Visualize Conference Run Time Environment	ObsVisualConf
Obsolete Glib, Libiconv, Gettext, and GTK+	ObsGNOMELib
Obsolete HP-UX Apache-based Web Server(32-bit) 2.2.x	Obshpuxws22APCH32
Obsolete HP-UX Apache-based Web Server 2.2.x	Obshpuxws22APACHE
Obsolete HP-UX Tomcat-based Servlet Engine(/opt/hpws22/tomcat)	Obshpuxws22TOMCAT
Obsolete HP-UX Webmin-based Admin(/opt/hpws22/webmin)	Obshpuxws22WEBMIN
ONCplus	ONCplus
PropPlus (HP-UX SMH Supplemental Functionality)	SysMgmtPlus

Table Continued

Required software product	Bundle name
Provider Utils	ProviderSvcBase
Standard HP-UX patch bundles	
Feature Enablement Patch Bundle	FEATURE11i
Hardware Enablement Patch Bundle	HWEnable11i
Quality Pack Patch Bundles (QPKAPPS)	QPKAPPS
Quality Pack Patch Bundles (QPKBASE)	QPKBASE
SysMgmtMin Bundle (SysMgmtMin)	
Contains user tools and utilities used for administering HP-UX, including:	
Common System Management Enablers	SysMgmtBASE
Disks and File Systems	filesystems
Event Monitor GUI	EMSWeb
Event Monitoring Service	EventMonitoring
HPE Instant Capacity Manager	iCAPMgr
WBEM Services for HP-UX	WBEMSvcS
HP-UX Accounts for Users and Groups	UserGroups
HP-UX Kernel Configuration	Casey
HP-UX Peripheral Device Tool	PeriphDev
HP-UX Printers and Plotters Tool	PrinterConfig
HP-UX Security Attributes Configuration	SecConfig
HP-UX Software Distributor	SW-DIST
HP-UX Software Manager	SWM
HP-UX Update-UX	UPDATE-UX

Table Continued

Required software product	Bundle name
Instant Capacity	B9073BA
Judy Libraries	Judy
Network Configuration	NetworkConf
nPartition Provider	nParProvider
OpenSSL	OpenSSL
System Fault Management	SysFaultMgmt
VxFS 4.1	Base-VXFS
VxFS 6.1	Base-VxFS-61
HP-UX Whitelisting	WhiteListInf

Table 22: HP-UX 11i v3 BOE recommended software

BOE recommended software product	Bundle name
Base Virtualization Software	VirtualBase
Distributed Systems Administration Utilities	DSAUilities
BaseNVMe Disk Driver	Nvmedisk-01
NVMeCache driver	NVMeCache
NVMeCache	NVMEC
Drivers	
10GigEthr-03	10GigEthr-03
10GigEthr-04 (Not currently supported. For future products only.)	10GigEthr-04
10GigEthr-05	10GigEthr-05
FibrChanl-00	FibrChanl-00
FibrChanl-01	FibrChanl-01

Table Continued

BOE recommended software product**Bundle name**

FibrChanl-02	FibrChanl-02
FibrChanl-03	FibrChanl-03
FibrChanl-04 (Not currently supported. For future products only.)	FibrChanl-04
PCIInfo-00	PCIInfo-00
SATADVD-00	SATADVD-00
Dynamic nPartitions	DynamicNPars
Dynamic Root Disk	DynRootDisk
Gnome GUI Runtime Toolkit	GTK
Firefox for HP-UX	FIREFOX
Thunderbird for HP-UX	TBIRD
HPE aCC_link bundle	HP-ACC-Link
HP Caliper	HP-Caliper-Perf
HP CIFS Server	CIFS-SERVER
HP FTP Server	HPUX-FTPServer
HP-UX Portable Image	HPPortableImage
HP Process Resource Manager	B3835DA
HP System Management Homepage	SysMgmtWeb
HP WildeBeest Debugger	HP-WDB-DEBUGGER
HP-UX Auto Port Aggregation	J4240AA
HP-UX Bastille Security Tool	HPUXBastille
HP-UX DHCPv4 Server	HPUX-DHCPv4
This is a core bundle.	

Table Continued

BOE recommended software product**Bundle name**

HP-UX DHCPv6 Server

HPUX-DHCPv6

This is a core bundle.

HPUXEssential

HPUXEssential

Contains operating system software that is required by most HP-UX users.

NOTE: Make sure you do not clear this bundle or remove it from your system unless you know for certain that the software contained in this bundle is not required for your operating environment.

HP-UX Gated and Mouted Server

HPUXGatedMouted

This is a core bundle.

HP-UX IPFilter

IPFilter

HP-UX IPv6 Routing Server

HPUX-RAMD

This is a core bundle.

HP-UX Nameserver (BIND)

HPUX-NameServer

HP-UX manpages for English and Japanese

HPUXMan-Eng

HPUXMan-Jpn

HP-UX NTP Server

HPUX-NTP

This is a core bundle.

HP-UX TCP Wrapper daemon

HPUX-TCPWRAP

This is a core bundle.

HP-UX Secure Shell

SecureShell

HP-UX Software Assistant

SwAssistant

Table Continued

HP-UX Web Server Suite

HP-UX Apache-based Web Server	hpuxws24Apache
HP-UX Tomcat-based Servlet Engine	hpuxws24Tomcat
HP-UX Webmin-based Admin	hpuxws24Webmin

Table Continued

BOE recommended software product**Bundle name**

HP-UX XML Web Server Tools

hpuxwsXml

Install-Time Security Infrastructure

Sec00Tools

HP-UX PHP

HPUX-PHP

Internationalization

Contains internationalization support for many languages.

HPUXLocales

Contains language-specific input methods, printer and terminal support, fonts and utilities.

HPUXExtns-Jpn

HPUXExtns-Kor

HPUXExtns-SCh

HPUXExtns-TCh

HP-UX message catalogs that contain localized language message catalogs for functionality in the HPUXMinRuntime and HPUXEssential bundles.

HPUXMsgs-Fre

HPUXMsgs-Ger

HPUXMsgs-Ita

HPUXMsgs-Jpn

HPUXMsgs-Kor

HPUXMsgs-SCh

HPUXMsgs-Spa

HPUXMsgs-Swe

HPUXMsgs-TCh

Java bundles

Java Development Kit and Java Runtime Environment (7.0)

Java70

Java Development Kit and Java Runtime Environment (8.0)

Java80

LDAP-UX Integration

LDAPUX

OpenView SNMP Agent

OVsnmpAgent

PAM Kerberos

PAMKerberos

Partition Manager

ParMgr

Table Continued

BOE recommended software product**Bundle name**

Perl Programming Language

perl

perl528

Provider Default Tools (ProviderDefault)

Application Discovery Agent

AppDiscAgent

HPE Global Workload Manager Agent

gWLMAgent

HP-UX File System CIM Provider

WBEMP-FS

HP-UX Kernel Providers

KERNEL-PROVIDERS

HP-UX WBEM Direct Attached Storage Provider

DASProvider

HP-UX WBEM LAN Provider for Ethernet Interfaces

WBEMP-LAN-00

HP-UX WBEM SCSI Provider

SCSIProvider

Serial SCSI Provider

SAS-PROVIDER

Smart Array Provider

RAIDSA-PROVIDER

Online Provider

OLOSPProvider

Utilization Provider

utilProvider

vPartition Provider

VParProvider

WBEM Indication Provider for IOTree subsystem

WBEMP-IOTreeIP

WBEM Provider for Fibre Channel HBAs

WBEMP-FCP

PRM Kernel Software

PRMKernelSW

PRM Libraries

PRMLibraries

SCSI Persistent Reservation Utilities

SCSI-PR-Utilites

Tune-N-Tools

Tune-N-Tools

Table 23: HP-UX 11i v3 BOE optional software

BOE optional software product	Bundle name
Support Tools	SUPPORT-TOOLS
AioEnh	Aio-Enh
Base VxTools 61	Base-VxTools-61
Base VxVM 61	Base-VxVM-61
Common Desktop Environment (CDE) bundle (xxx is language variable).	CDE-xxx
NOTE: CDE is an optional product in HP-UX 11i v3. If you require it, you must explicitly select the CDE bundle (CDE-XXX). This applies if you need <code>dtterm</code> , which is located in CDE. For some localization situations, <code>dtterm</code> is required, therefore CDE must be selected.	
Cpio Enhancement	CpioCmdEnh
Drivers	
10GigEthr-00	10GigEthr-00
10GigEthr-01	10GigEthr-01
HyprFabrc-00	HyprFabrc-00
IB4X-00 Driver for InfiniBand	IB4X-00
ISO Image Mount Enhancement	ISOIMAGE-ENH
PCIMUX-00	PCIMUX-00
TERMIO-00	TERMIO-00
Dynamic System V Semaphore Tunables	DynSysVSem
EnergySaver	EnergySaver
FIFOENH	FifoEnh
FileSystem-SRP	FileSystem-SRP
getenv Performance Enhancement	GetenvEnh
HP 9000 Containers	HP9KContainers
HPE Insight Control power management	HPICPM-HP-UX
HP Process Resource Manager (PRM) web GUI Systems Insight Manager (SIM) Integration Files	PRMSIMTools
HPE Systems Insight Manager (HPE SIM)	HPSIM-HP-UX

Table Continued

BOE optional software product**Bundle name**

HP-UX Atomic Library	AtomicLib
HP-UX Auditing System Extensions	AuditExt
HP-UX Directory Server	HPDirSvr
HP-UX GUID Manager	GUIDMGR
HP-UX Host Intrusion Detection System	HPUX-HIDS
HP-UX IPsec	IPsec
HP-UX Internet Services	HPUX-SLP
HP-UX LongPassword for HP-UX 11i v3	LongPass11i3
HP-UX Mobile IPv4	HPUXMOBILEIPV4
HP-UX Mobile IPv6	HPUXMOBILEIP
HP-UX 3D Graphics Run Time Environment and Developer Kit	Graphics
HP-UX Password Hash Infrastructure for HP-UX 11i v3	PHI11i3
HP-UX Role-based Access Control Extension	AccessControl
HP-UX Secure Resource Partitions	HP-UX-SRP
HP-UX Security Containment Extensions	ContainmentExt
HPUX-Streams-SRP	HPUX-Streams-SRP
HP-UX Swapoff (Command)	swapoff
HPUX-Transport-SRP	HPUXTransportSRP
Ignite-UX	- Ignite-UX-11-11 - Ignite-UX-11-23 - Ignite-UX-11-31 - IGNITE
Insight managed system setup wizard	MgdSysSetupWzrd
Java Out-of-Box	JAVAOOB
Kerberos Client	KRB5CLIENT
Libc Enhancements	LibcEnhancement
MallocNextGen	MallocNextGen
Media Streaming Protocol	Media-Streaming

Table Continued

BOE optional software product**Bundle name**

MemFS	MemFS
Network Server Accelerator	NSAHTTP
Numeric User Group Name	NumericUser
Pax Enhancement (PAX-ENH)	PAX-ENH
RCEenhancement	RCEenhancement
SAR-MEMFS-ENH	SAR-MEMFS-ENH
Security Level 10	Sec10Host
Security Level 20	Sec20MngDMZ
Security Level 30	Sec30DMZ
SoftRebootEnh	SoftRebootEnh
Software Package Builder	SwPkgBuilder
TRUFGREP	FGREPMULTPAT
VFS-SHWRSP-ENH	VFS-SHWRSP-ENH
UmountallEnh	UmountallEnh
Virtual Server Environment Configuration Assistant (Insight Dynamics - VSE Configuration Assistant)	VseAssist
VFS-LOCKF-ENH	VFS-LOCKF-ENH

HP-UX 11i v3 Virtual Server Operating Environment

The HP-UX 11i v3 Virtual Server Operating Environment (VSE-OE) is designed for customers seeking higher resource utilization, a robust set of manageability tools, or embarking on consolidation projects that require virtualization. The entire set of products contained in the original HP-UX 11i v3 Enterprise OE can also be found in the VSE-OE.

Along with the features described previously in the HP-UX 11i v3 Base OE (upon which it is built), the VSE-OE includes the features listed in the following tables:

- **Table 21: HP-UX 11i v3 required software**
- **Table 24: HP-UX 11i v3 VSE-OE recommended software**
- **Table 25: HP-UX 11i v3 VSE-OE optional software**

For an overview of the changes to these features and products, see the **HP-UX 11i Version 3 Release Notes**.

For definitions of **required**, **recommended**, and **optional**, see **HP-UX 11i v3 software installation types**.

Table 24: HP-UX 11i v3 VSE-OE recommended software

VSE-OE recommended software product	Bundle name
High Availability (HA) Monitors	B5736DA
HPE Capacity Advisor LTU	T2784AC
HPE Global Workload Manager Agent LTU	T2762AA
HP Operations Agent	TC0970
HPE Serviceguard Toolkit for Integrity Virtual Servers	SG-IVS-Toolkit
HP Virtualization Manager LTU	T2782AC
HP VSE Suite LTU	T2786AC
HP-UX Workload Manager	B8843CA
HP-UX Workload Manager Toolkit	WLMToolkits
Mirrordisk/UX LT	B2491BA
OnlineJFS 6.1	B3929IB
Plus the list in Table 22: HP-UX 11i v3 BOE recommended software	

Table 25: HP-UX 11i v3 VSE-OE optional software

VSE-OE optional software product	Bundle name
HP Integrity Virtual Machines Online Migration Software (OVMM)	T8718AC
HP-UX Online Guest Migration	vParOGMEnh
HPE Integrity Virtual Server Manager (formerly HP Integrity Virtual Machines Manager)	VMMGR
HP-UX Virtual Partitions v5	T1335DC
HP-UX vPars and Integrity VM v6.x	BB068AA
OnlineJFS 4.1	B3929EA
Plus the list in Table 23: HP-UX 11i v3 BOE optional software	

HP-UX 11i v3 High Availability Operating Environment

The HP-UX 11i v3 High Availability Operating Environment (HA-OE) provides an integrated environment tested and designed for mission critical applications. The entire set of products contained in the original HP-UX 11i v3 Enterprise OE can also be found in the HA-OE.

In addition to the features described previously in the HP-UX 11i v3 Base OE (upon which it is built), the HA-OE includes the features listed in the following tables:

- **Table 21: HP-UX 11i v3 required software**
- **Table 26: HP-UX 11i v3 HA-OE recommended software**
- **Table 27: HP-UX 11i v3 HA-OE optional software**

For an overview of the changes to these features and products, see the **HP-UX 11i Version 3 Release Notes**.

For definitions of **required**, **recommended**, and **optional**, see **HP-UX 11i v3 software installation types**.

Table 26: HP-UX 11i v3 HA-OE recommended software

HA-OE recommended software product	Bundle name
Enterprise Cluster Master (ECM) Toolkit	T1909BA
High Availability (HA) Monitors	B5736DA
HP Operations Agent	TC097O
HPE Serviceguard	T1905CA
HPE Serviceguard NFS Toolkit	B5140BA
HPE Serviceguard Toolkit for Integrity Virtual Servers	SG-IVS-Toolkit
Mirrordisk/UX	B2491BA
OnlineJFS 6.1	B3929IB

Plus the list in **Table 22: HP-UX 11i v3 BOE recommended software**



Table 27: HP-UX 11i v3 HA-OE optional software

HA-OE optional software product	Bundle name
HPE Serviceguard Extension for RAC	T1907BA
OnlineJFS 4.1	B3929EA
Plus the list in Table 23: HP-UX 11i v3 BOE optional software	

HP-UX 11i v3 Data Center Operating Environment

The Data Center Operating Environment (DC-OE) is designed for customers who require both flexibility and high availability. Combining all the features of both the High Availability and Virtual Server OEs, the DC-OE provides robust mission critical virtualization in an integrated and tested bundle. The entire set of products contained in the original HP-UX 11i v3 Mission Critical OE can also be found in the DC-OE.

In addition to the features described previously in the HP-UX 11i v3 Base OE (upon which it is built), the DC-OE includes the features listed in the following tables:

- **Table 21: HP-UX 11i v3 required software**
- **Table 28: HP-UX 11i v3 DC-OE recommended software**
- **Table 29: HP-UX 11i v3 DC-OE optional software**

For an overview of the changes to these features and products, see the **HP-UX 11i Version 3 Release Notes**.

For definitions of **required**, **recommended**, and **optional**, see **HP-UX 11i v3 software installation types**.

Table 28: HP-UX 11i v3 DC-OE recommended software

DC-OE recommended software product	Bundle name
Enterprise Cluster Master (ECM) Toolkit	T1909BA
High Availability (HA) Monitors	B5736DA
HPE Capacity Advisor LTU	T2784AC
HPE Global Workload Manager Agent LTU	T2762AA
HPE Operations Agent	TC0970
HPE Serviceguard	T1905CA
HPE Serviceguard NFS Toolkit	B5140BA
HPE Serviceguard Toolkit for Integrity Virtual Servers	SG-IVS-Toolkit

Table Continued

DC-OE recommended software product**Bundle name**

HPE Virtualization Manager LTU

T2782AC

HPE VSE Suite LTU

T2786AC

HP-UX Workload Manager

B8843CA

HP-UX Workload Manager Toolkits

WLMToolkits

Mirrordisk/UX LT

B2491BA

OnlineJFS 6.1

B3929IB

Plus the list in **Table 22: HP-UX 11i v3 BOE recommended software****Table 29: HP-UX 11i v3 DC-OE optional software****DC-OE optional software product****Bundle name**

HPE Integrity Virtual Machines Online Migration Software (OVMM)

T8718AC

HPE Integrity Virtual Server Manager (formerly HP Integrity Virtual Machines Manager)

VMMGR

HPE Serviceguard Extension for RAC

T1907BA

HP-UX Virtual Partitions v5

T1335DC

HP-UX vPars and Integrity VM v6.x

BB068AA

OnlineJFS 4.1

B3929EA

Plus the list in **Table 23: HP-UX 11i v3 BOE optional software**

Warranty and regulatory information

For important safety, environmental, and regulatory information, see *Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products*, available at <https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>.

Warranty information

HPE ProLiant and x86 Servers and Options <https://www.hpe.com/support/ProLiantServers-Warranties>

HP Enterprise Servers <https://www.hpe.com/support/EnterpriseServers-Warranties>

HPE Storage Products <https://www.hpe.com/support/Storage-Warranties>

HPE Networking Products <https://www.hpe.com/support/Networking-Warranties>

Regulatory information

Belarus Kazakhstan Russia marking



Manufacturer and Local Representative Information

Manufacturer information:

Hewlett Packard Enterprise, 3000 Hanover Street, Palo Alto, CA 94304, U.S.

Local representative information Russian:

- **Russia**

ЗАО "Хьюлетт-Паккард А.О.", 125171, Россия, г. Москва, Ленинградское шоссе, 16А, стр.3, тел/факс: +7 (495) 797 35 00, +7 (495) 287 89 05

- **Belarus**

:

ИООО «Хьюлетт-Паккард Бел», 220030, Беларусь, г. Минск, ул. Интернациональная, 36-1, офис 722-723, тел.: +375 (17) 392 28 18, факс: +375 (17) 392 28 21

- **Kazakhstan**

:



ТОО «Хьюлетт-Паккард (К), 050040, Казахстан, г. Алматы, Бостандыкский район, ул. Тимирязева, 28В, 1 этаж, тел./факс: +7 (727) 355 35 50, +7 (727) 355 35 51

Local representative information Kazakh:

Kazakhstan

:

ЖШС «Хьюлетт-Паккард (К)», Қазақстан, Алматы қ., Бостандық ауданы, Тимирязев к-сі, 28В, тел./факс: +7 (727) 355 35 50, +7 (727) 355 35 51

Manufacturing date:

The manufacturing date is defined by the serial number.

CCSYWWZZZZ (serial number format for this product)

Valid date formats include:

- YWW, where Y indicates the year counting from within each new decade, with 2000 as the starting point; for example, 238: 2 for 2002 and 38 for the week of September 9. In addition, 2010 is indicated by 0, 2011 by 1, 2012 by 2, 2013 by 3, and so forth.
- YYWW, where YY indicates the year, using a base year of 2000; for example, 0238: 02 for 2002 and 38 for the week of September 9.

Turkey RoHS material content declaration

Türkiye Cumhuriyeti: EEE Yönetmeliğine Uygundur

Ukraine RoHS material content declaration

Обладнання відповідає вимогам Технічного регламенту щодо обмеження використання деяких небезпечних речовин в електричному та електронному обладнанні, затвердженого постановою Кабінету Міністрів України від 3 грудня 2008 № 1057

